

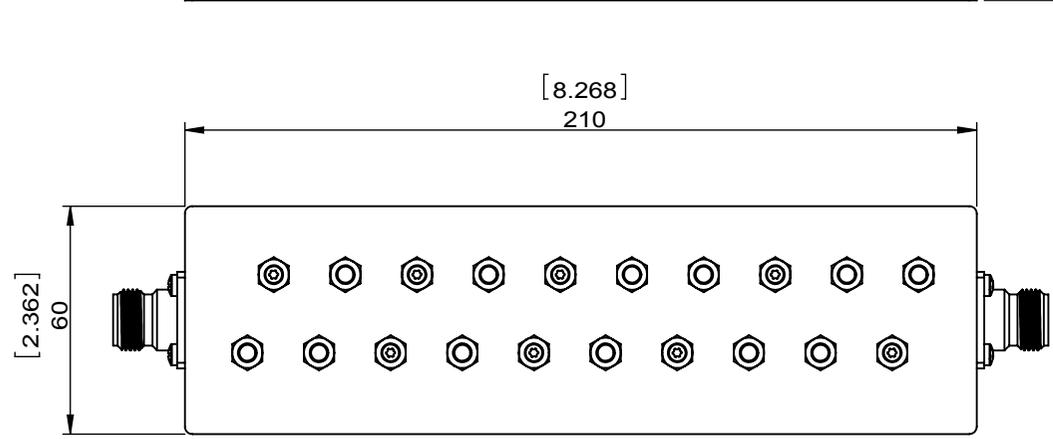


| | | | | | | | | | | | | | |
|--------------|---------------|------|-----|------|---|-------------|--|---------|----------|------|------------|----------|-------|
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | | | |
| Document No. | QR4-700-T-003 | REV. | A/0 | REV. | 0 | DESCRIPTION | | REVISOR | LJ.Zhang | DATE | 08.04.2014 | APPROVED | David |

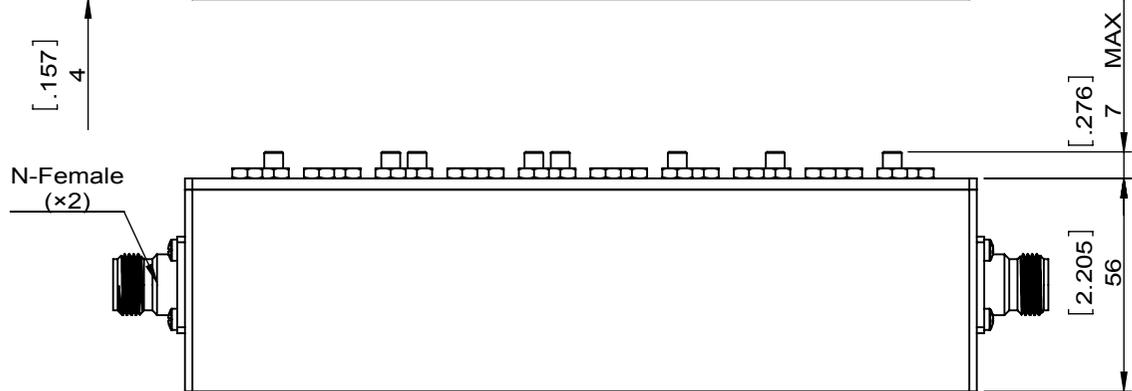

| ITEM | SPECIFICATIONS |
|---------------------------|--|
| Frequency(MHz) | 406~512 |
| Insertion Loss(dB) | 0.5 Max. |
| Return Loss(dB) | 20 Min. |
| Attenuation(dB) | 60Min@812~1024 MHz 50Min@1218~1536 MHz 40Min@1624~3000 MHz |
| Power(Watt) | 10 Max |
| Operating Temperature(°C) | 10~30 |
| Connector | N-Female |
| Additional Notes | - |

| | | | | |
|--|--|-----------------------------------|--|----------------|
| JQL JQL Electronic Inc | | | | |
| MATERIAL: | | DWG NO: JFCB0406T0512NF | | |
| SURFACE TREATMENT: PAINTED BLACK | | DWG BY: | LJ.Zhang | 08.04.2014 |
| DESCRIPTION: FILTER | | CHK'D BY: | | SCALE |
| | | APPV'D BY: | | 1:2 |
| | | Unit: mm[inch] | Tolerance: Liner: ± 0.25 Anguar: $\pm 0.5^\circ$ | The First: |
| | | | | A4 |

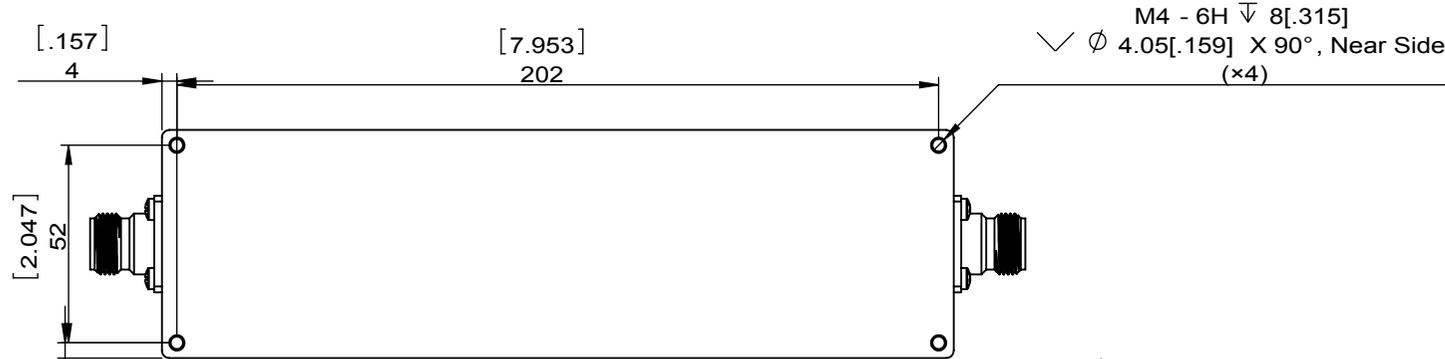

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.