


1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV.		A/0						REVISER		DATE	
								ZQ.Hou		02.27.2015	
								APPROVED		David	

其余: ∇ 1.6

ITEM	SPECIFICATIIONS
Frequency range(MHz)	422~424
IMD Products on Output(dBc)	Better than 80(with all input ports at 47 dBm drive level)
Harmonics of Inout Signal(dB)	Better than 40 at output port
Insetion Loss(dB) 2 Port 4 Port Balanced	4 8
Isolation(dB)(any input port to ant other input port)	70min
Insetion Loss (dB) 4Port UnBalanced	Port 1=4 Port 2=8 Port 3=12 Port 4=12
Size(W x D x H)(depth measurement includes RF jumpers)	19" x 19" x 1.75"
Weight(lbs)	19
Power(W)	60 each port(total depends on configuration)
Temperature Range(°C)	-30~+60
Connector	Type-N Female
Notes	

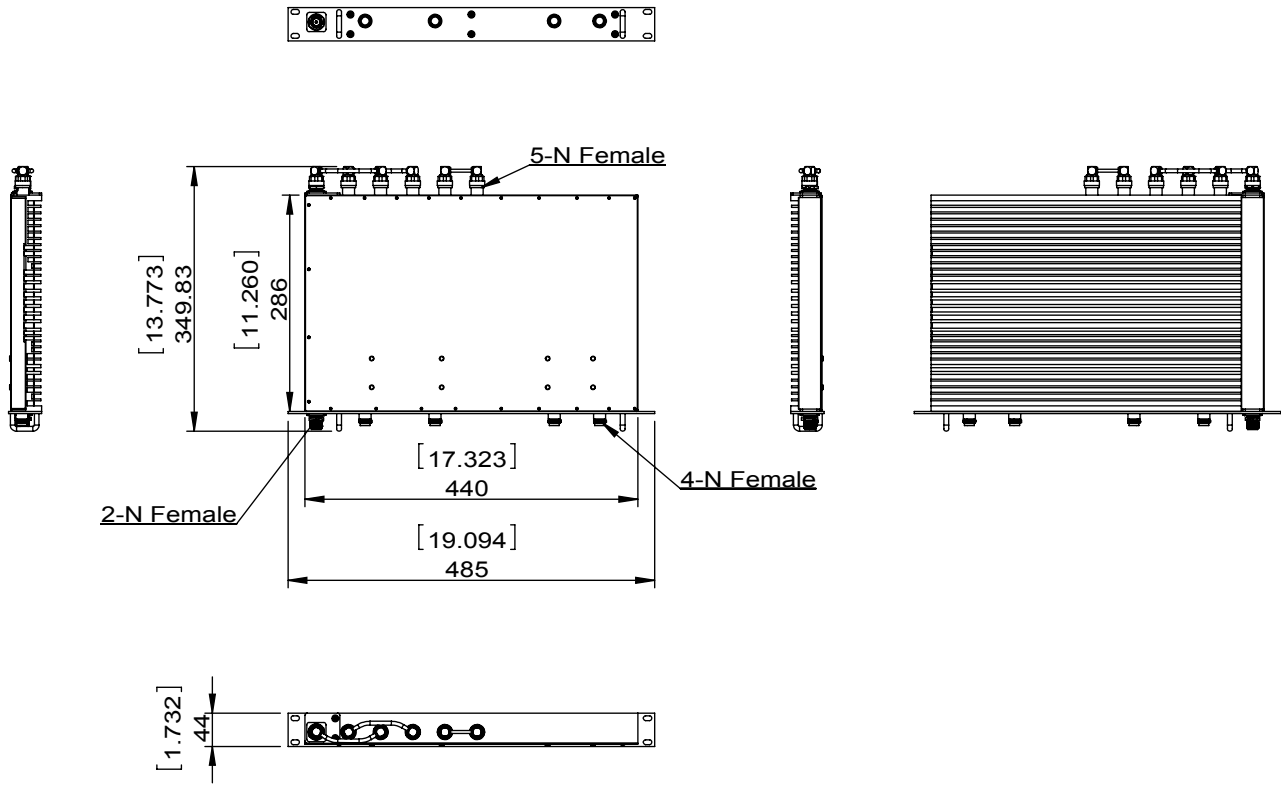

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc		500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA		Tel: 1(888)236-9828 Fax: 1(888)823-2902	
MATERIAL:		DWG NO: JFCC0422T0424NF			
SURFACE TREATMENT:		DWG BY: ZQ.Hou		02.27.2015	
DESCRIPTION: COMBINER		CHK'D BY:		SACLE	
		APPV'D BY:		1:10	
Unit: mm[inch]		Tolerance:		The First:	
		Liner/Anguar: ISO2768_m			
WEIGHT:		5		SHEET 1 OF 1	