


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	ZQ.Hou	DATE	02.27.2015	APPROVED	David



ITEM	SPECIFICATIONS	Maker Proposal Specification
Frequency range(MHz)	138~174(RX=152;TX=157)	OK
TX passband(KHz)	500	OK
RX passband(KHz)	500	OK
Insetion Loss(dB)	1.5 Max	OK
Isolation(dB)	80min	OK
Rejection(dB):(TX passband to RX passband)	80min	OK
Return Loss(dB)	15Min	OK
Input/Output Power(W)	2 Min CW	OK
Temperature(°C)	-30~+60	OK
Connector	N FEMALE	OK
Notes		OK

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCD0138T0174NF		
SURFACE TREATMENT:		DWG BY:	ZQ.Hou	02.27.2015
DESCRIPTION: DUPLEXER		CHK'D BY:		SCALE
		APPV'D BY:		1:5
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

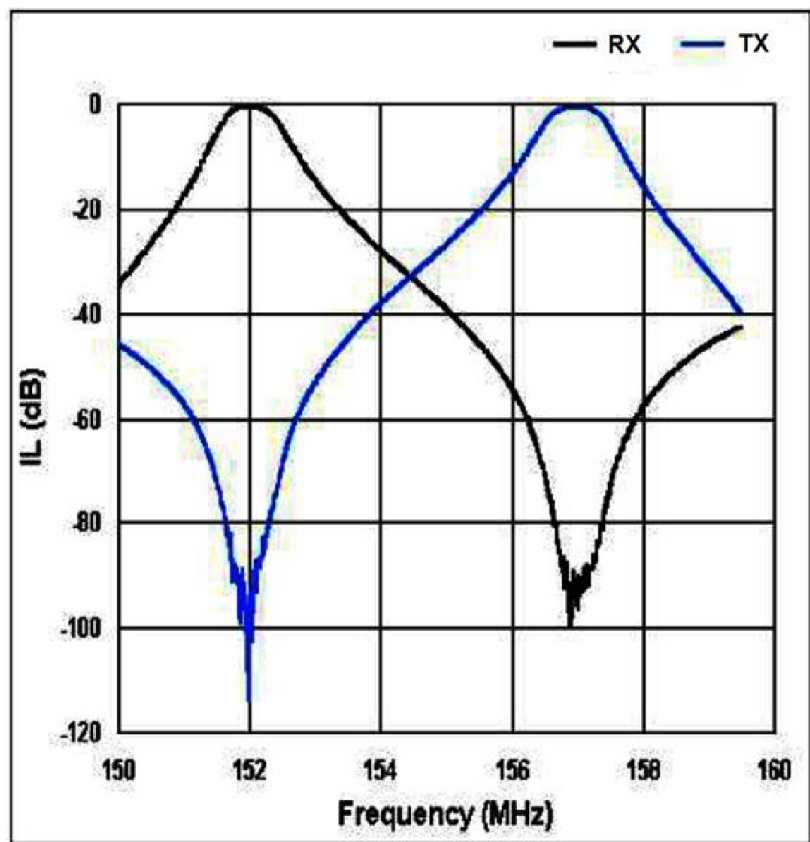

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.