


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ywzhang	18.06.2014	David					

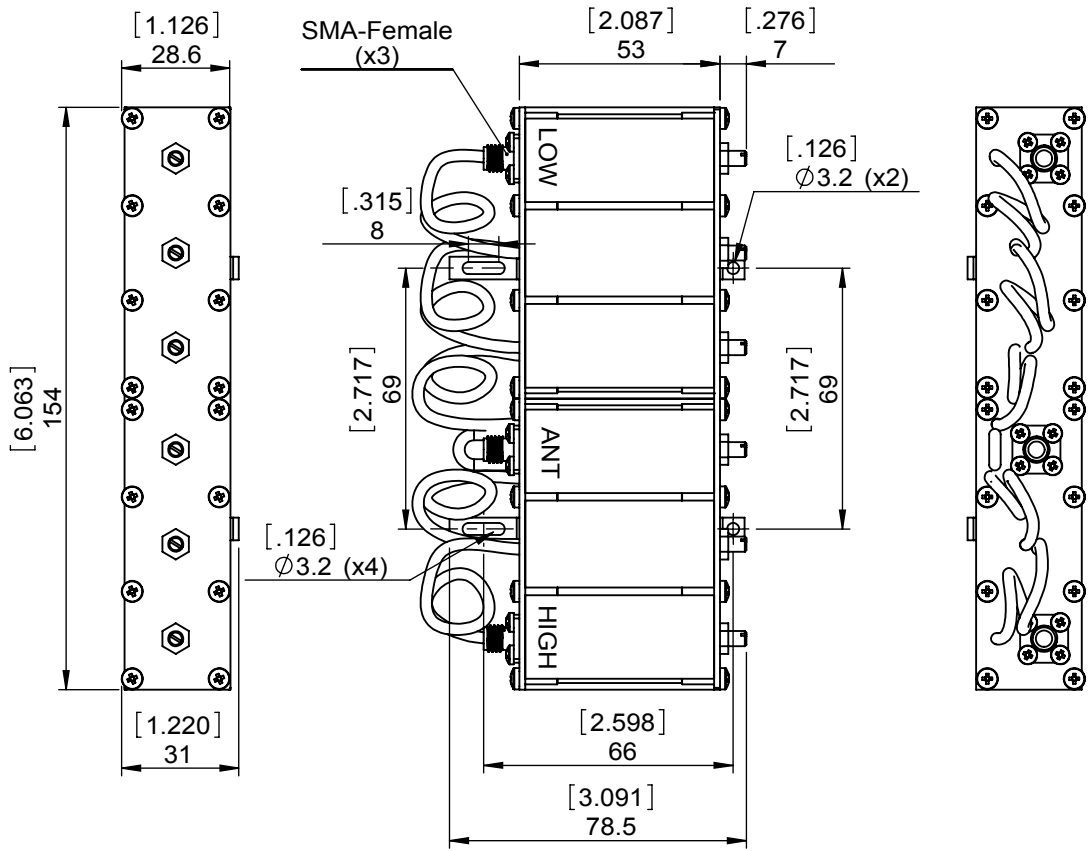

ITEM	SPECIFICATIONS	
	TX	RX
Passband(MHz)	456.9625	462.4625
Insertion Loss(dB)	1.5 max	
Return Loss(dB)	14 min	
Isolation(dB)	65 min	
Power Rating(W)	25	
Impedance(Ω)	50	
Temperature(°C)	-30 to +60	
Connector	SMA-Female	
Notes		

**JQL** JQL Electronic Inc 3501 Algonquin Road, Ste 230 1(888) 236-9828  
Rolling Meadows, IL 60008 (630) 823-2902

<b>MATERIAL:</b>	<b>DWG NO:</b> JFCD0456T0462SF			
<b>SURFACE TREATMENT:</b> PAINTED BLACK	DWG BY:	ywzhang	18.06.2014	SACLE
	CHK'D BY:			
<b>DESCRIPTION:</b> DUPLEXER	APPV'D BY:			1:2
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		

**RoHS COMPLIANCE**  
This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.