

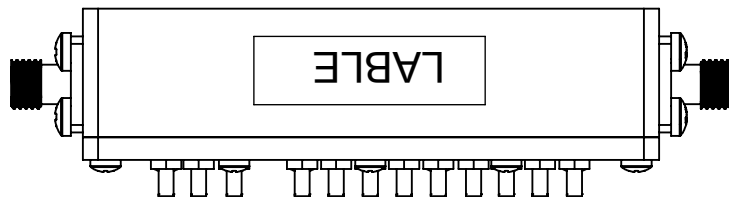
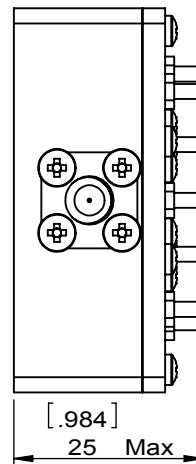
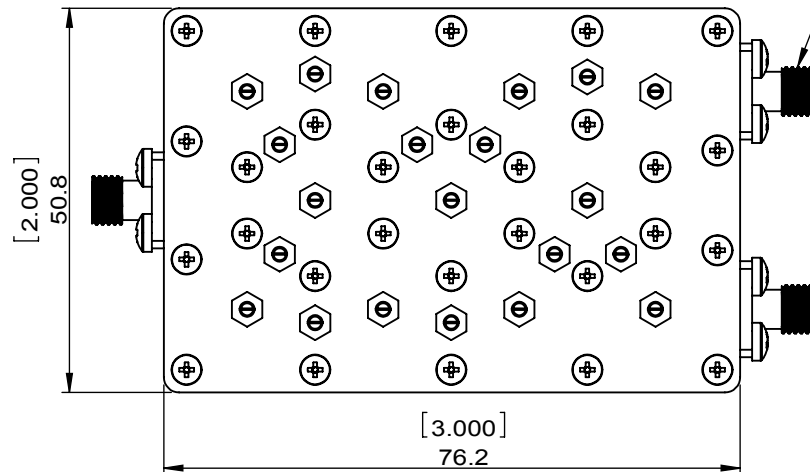


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	ZQ.Hou	DATE	06.23.2015	APPROVED	David

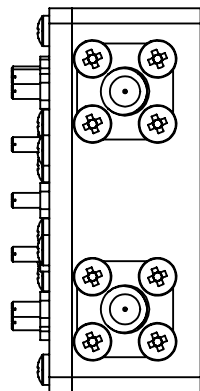

ITEM	SPECIFICATIONS	
Frequency blocking range(GHz)	CH1	CH2
	9.9~10.3	10.6~10.7
Insertion Loss(dB)	1.0 Max	
Reject(dB)	40 Min@10.6~10.7GHz	40 Min@ 9.9~10.3GHz
Return Loss(dB)	14Min	
Impedance(Ω)	50	
Power(W)	1 Min CW	
Temperature(°C)	-40~+85	
Connector	SMA FEMALE	
Notes		

4 x M2.5 - 6H ∇ 5[.197]

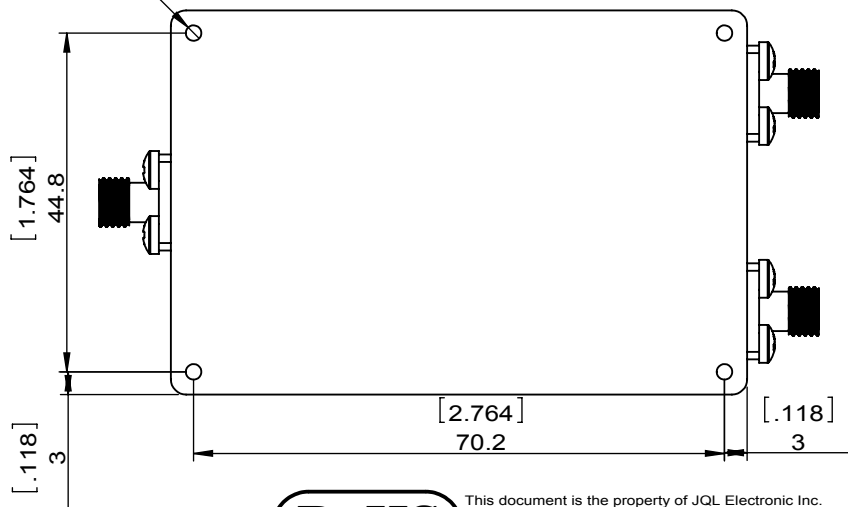

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.



JQL JQL Electronic Inc

MATERIAL:	DWG NO: JFCD9900T10700SF			
SURFACE TREATMENT: PAINTED BLACK	DWG BY:	ZQ.Hou	06.23.2015	SCALE
	CHK'D BY:			
DESCRIPTION: DIPLEXER	APPV'D BY:			1:1
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		

WEIGHT:

SHEET 1 OF 2

1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZQ.Hou	06.23.2015	David					

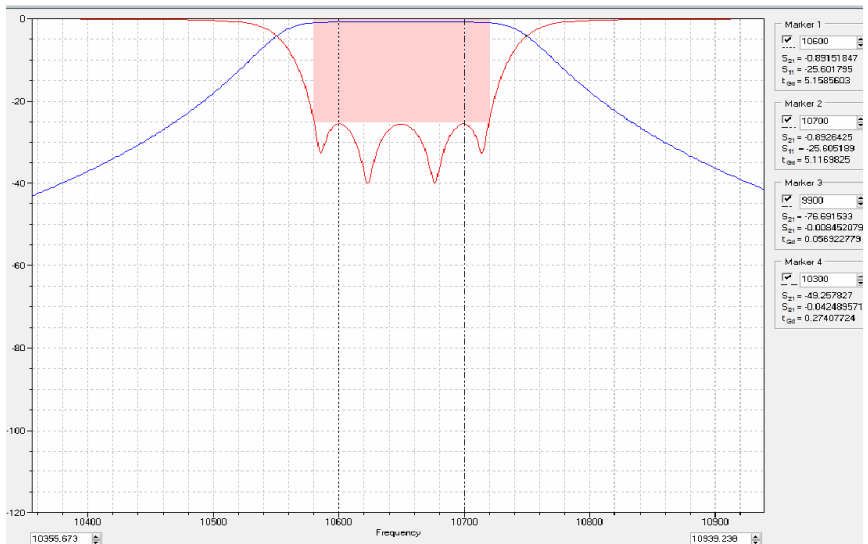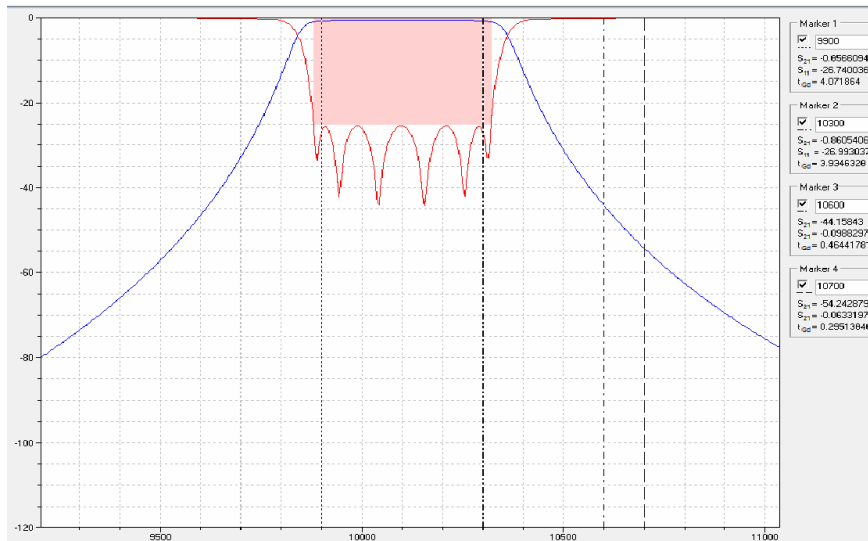

ITEM	SPECIFICATIONS	
	CH1	CH2
Frequency blocking range(GHz)	9.9~10.3	10.6~10.7
Insertion Loss(dB)	1.0 Max	
Reject(dB)	40 Min@10.6~10.7GHz	40 Min@ 9.9~10.3GHz
Return Loss(dB)	14Min	
Impedance(Ω)	50	
Power(W)	1 Min CW	
Temperature(°C)	-40~+85	
Connector	SMA FEMALE	
Notes		

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCD9900T10700SF		
SURFACE TREATMENT: PAINTED BLACK		DWG BY:	ZQ.Hou	06.23.2015
DESCRIPTION: DIPLEXER		CHK'D BY:		SCALE
		APP'V'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.