


1		2		3		4		5		6	
Document No. QR4-700-T-003						REV. 0		DESCRIPTION		REVISOR YQ.XIE	
REV. A/0										DATE 07.28.2015	
										APPROVED David	



SPECIFICATIONS	
Part's Number	JIWR75-12D7-12K75T13K5
Frequency(GHz)	12.75~13.50
Direction	-
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	23.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	10/2/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b> AL		<b>DWG NO:</b> JIWR75-1277-12K75T13K5		
<b>SURFACE TREATMENT:</b>		DWG BY: YQ.XIE	07.28.2015	SCALE
<b>DESCRIPTION:</b> WAVEGUIDE ISOLATOR		CHK'D BY:		1:1
		APPV'D BY:		A4
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:

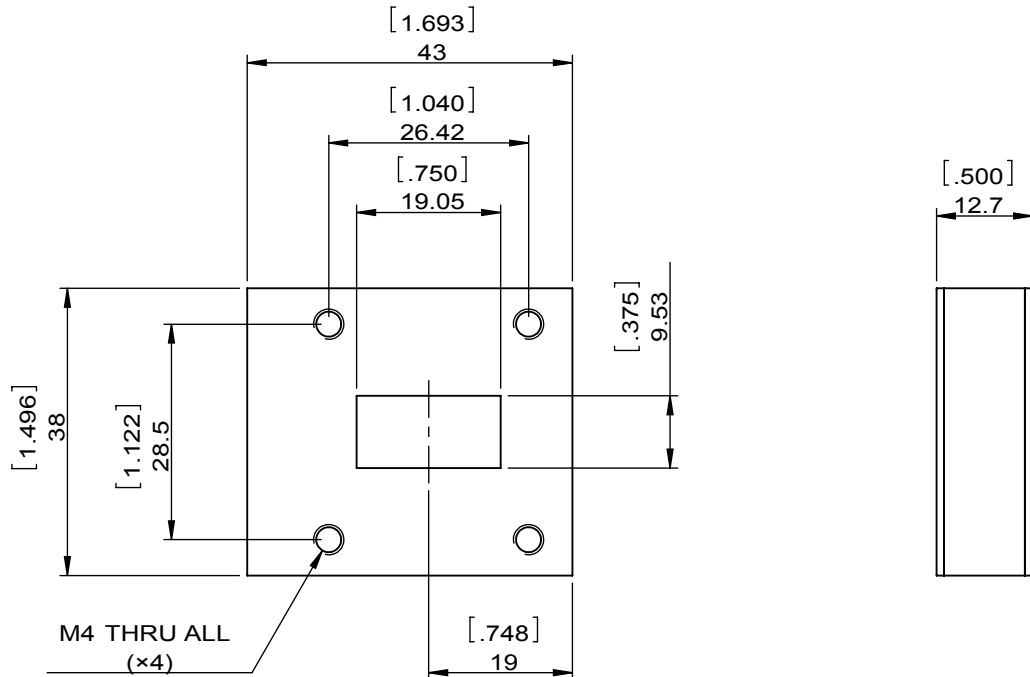

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.