



1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LJ.Zhang	DATE	05.08.2015	APPROVED	David

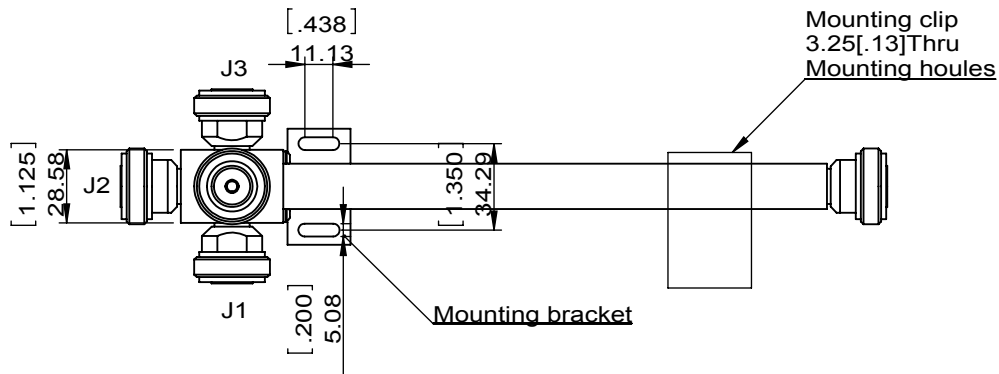

SPECIFICATIONS	
Frequency(MHz)	698~2700
Return Loss(dB)	19.1 Min
Split Loss(dB)	6.4
Ripple Loss(dB)	0.3
IMD(dBc)	150 Min with 2×43dBm tones
Input Power (Watt)	500
Impedance(Ω)	50
Operating Temperature(°C)	-25~+65
Connector	7/16-Female
Environmental Class	IP65
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: PS0698T2700DF4		
SURFACE TREATMENT: PAINTED BLACK		DWG BY:	LJ.Zhang	05.08.2015
DESCRIPTION: 4 Way Power Divider		CHK'D BY:		SCALE
		APPV'D BY:		1:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

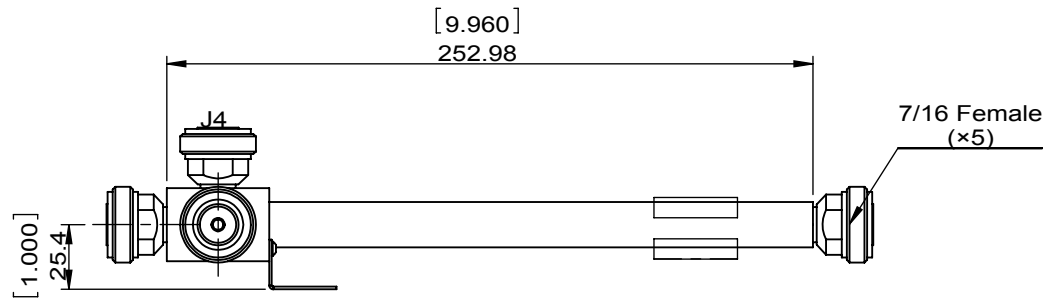

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.