


5		6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVE

**SPECIFICATIONS**

P/N: JCC0300T0420N20  
 FREQ: 0.300~0.420GHz  
 ISOLATION: 18dB MIN  
 INS LOSS: 0.5dB MAX  
 VSWR: 1.25:1 MAX  
 POWER: 200W AVG  
 CIRCULATION: CLOCKWISE  
 CONNECTOR: N-FEMALE  
 TEMPERATURE OPERATING: -20C~+60C  
 STORAGE: -55C~+125C

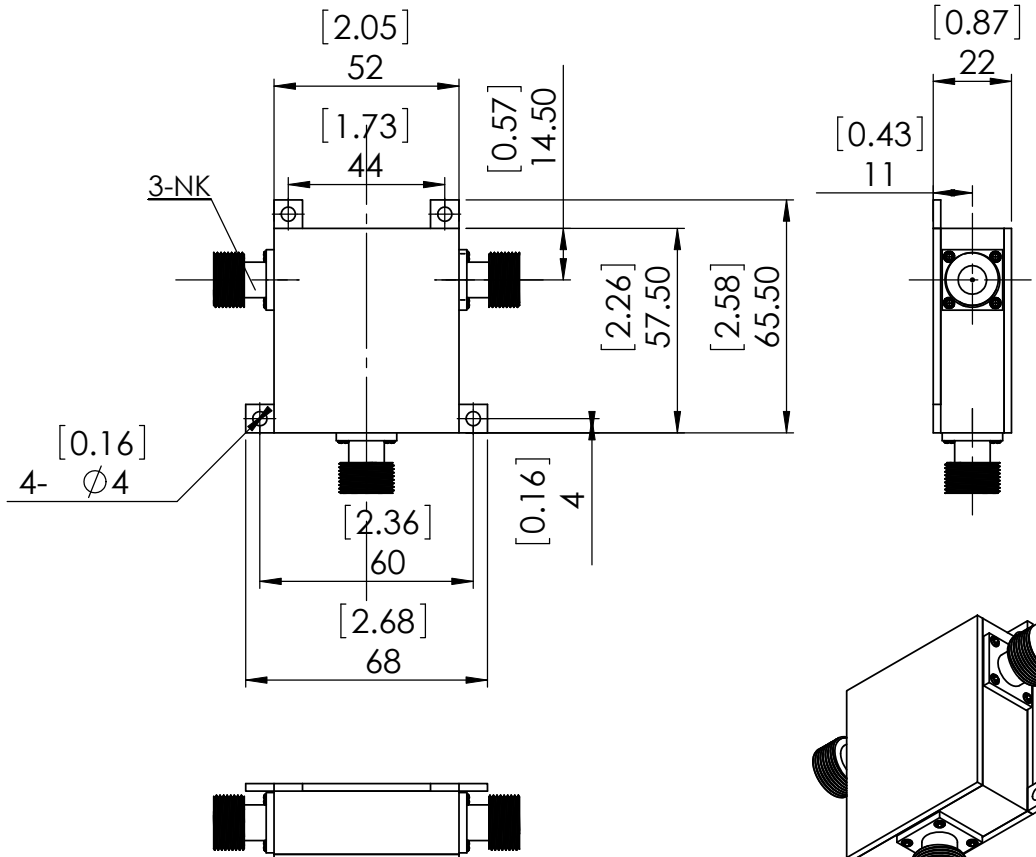

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

<b>JQL JQL Electronic Inc</b> 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel : 1(888)236-9828 Fax: 1(630)823-2902																	
MATERIAL: STEEL Y15 SURFACE TREATMENT: NICKLE PLATING DESCRIPTION: COAX CIRCULATOR	DWG NO. JCC0300T0420N20																
DWG BY: CHK'D BY: APPV'D BY:	<table border="1"> <tr> <th>NAME</th> <th>DATE</th> <th>SIGNATURE</th> <th>REV:</th> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	NAME	DATE	SIGNATURE	REV:												
NAME	DATE	SIGNATURE	REV:														
TOLERANCE Liner: ±0.1mm Angular: ±0.5°	Q.A A4																