

1

2


3

4

5

6

REV.	DESCRIPTION	REVISOR	DATE	APPROVE

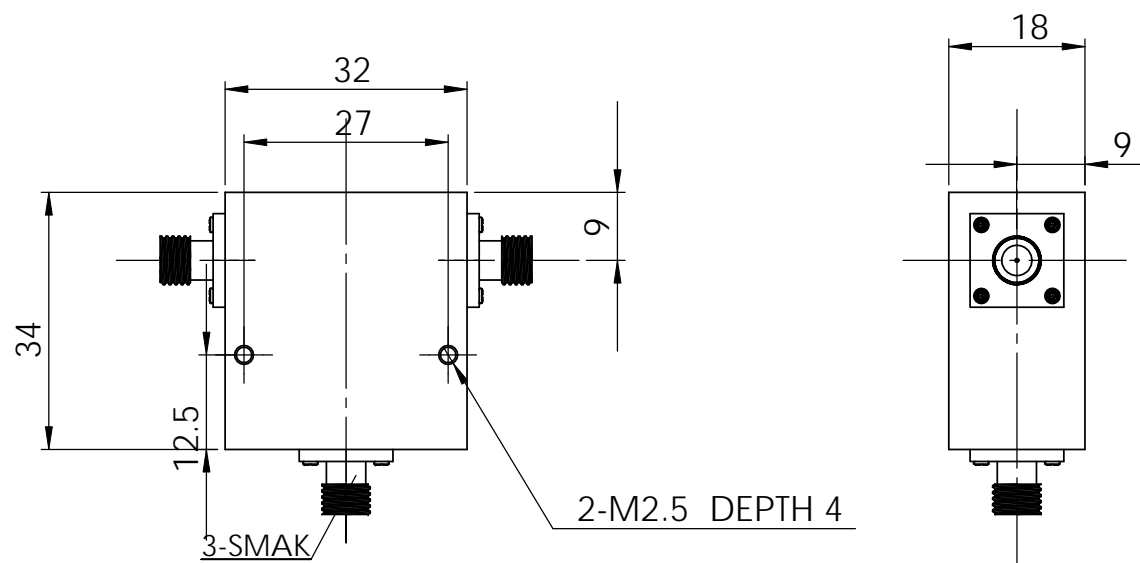

SEPCIFICATIONS

P/N: JCC2000T4000S6
FREQ: 2.0~4.0GHz

ISOLATION: 16dB MIN
INS LOSS: 0.6dB MAX
VSWR: 1.4:1 MAX
PWR: 60W
TEMP: -30C~+70C
CONNECTOR SMA-F

This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes
or communicated to third party as a whole or partly,
without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc

MATERIAL:

STEEL Y15

SURFACE TREATMENT:

DESCRIPTION:

COAX CIRCULATOR

DWG NO.

JCC2000T4000S6

	NAME	DATE	SIGNATURE	REV
DWG BY:				
CHK'D BY:				
APPV'D BY				
		TOLERANCE Liner: $\pm 0.1\text{mm}$ Angular: $\pm 0.5^\circ$	Q.A	A4

1

2

WEIGHT:

SCALE:1:1

SHEET 1 OF 1