
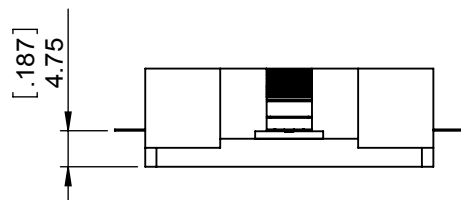



Document No. QR4-700-T-003

REV. A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		LJ.Zhang	07.08.2013	David

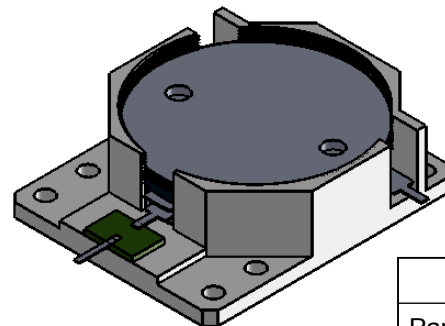

SPECIFICATIONS	
Part's Number	JID0380T0420KM10A3
Frequency(GHz)	0.380~0.420
Direction	CW
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	21.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	150/100/-
Operating Temperature(°C)	-20~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-/100/30
Tab(W×LG×THK)(mm[Inch])	1.3[.051×]4[.157]×0.2[.008]-
Additional Notes	-

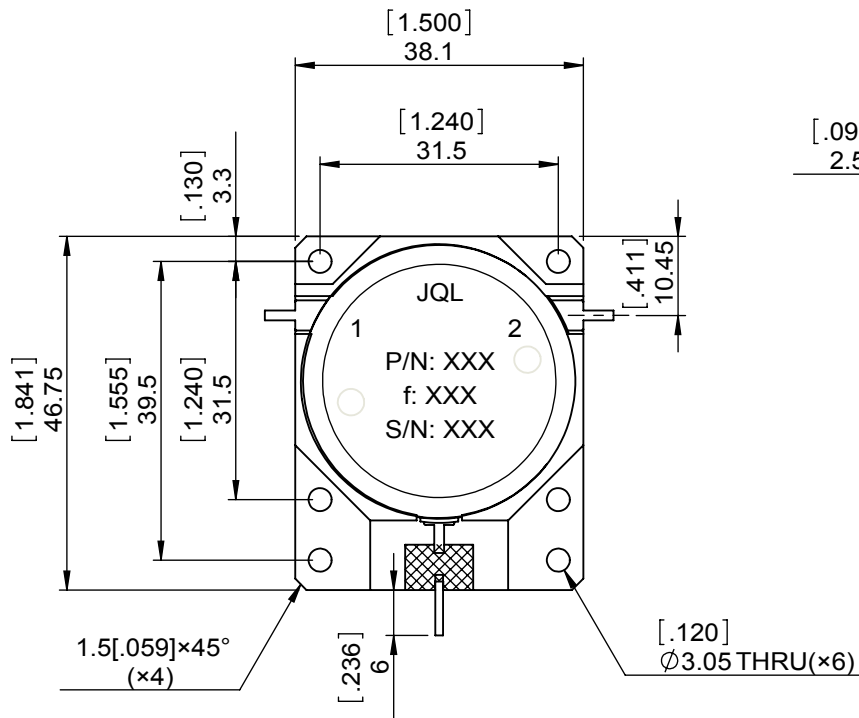

JQL JQL Electronic Inc 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel: 1(888)236-9828 Fax: 1(888)823-2902

MATERIAL: STEEL	DWG NO: JID0380T0420KM10A3			
	DWG BY:	LJ.Zhang	07.08.2013	SACLE
SURFACE TREATMENT: NICKEL PLATING	CHK'D BY:			
	APPV'D BY:			1:1
DESCRIPTION: DROP-IN ISOLATOR	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25		
		Anguar: ±0.5°		



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

WEIGHT:

5

SHEET 1 OF 1