

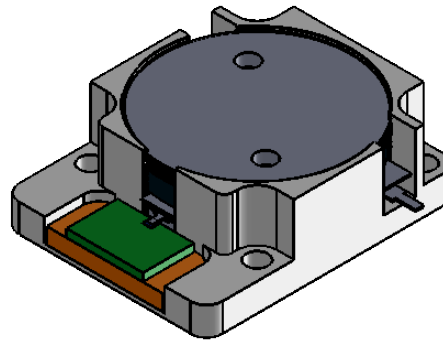


1	2
Document No.	QR4-700-T-003
REV.	A/0

4	5	6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		C.G	05.05.10	CH
1	Index update	Hu.Jiang	08.23.2019	HC.Qiu

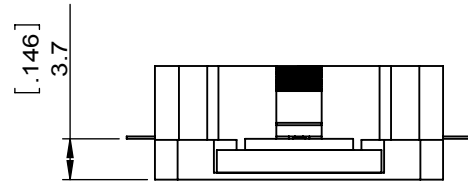

SPECIFICATIONS	
Part's Number	JID0900T0960M10
Frequency(GHz)	0.900~0.960
Direction	CW
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	21.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-75@2X43dBm 5MHz Spacing
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	150
Tab(W×LG×THK)(mm[Inch])	1[0.039]x2.5[0.098]x0.2[0.008]
Additional Notes	-

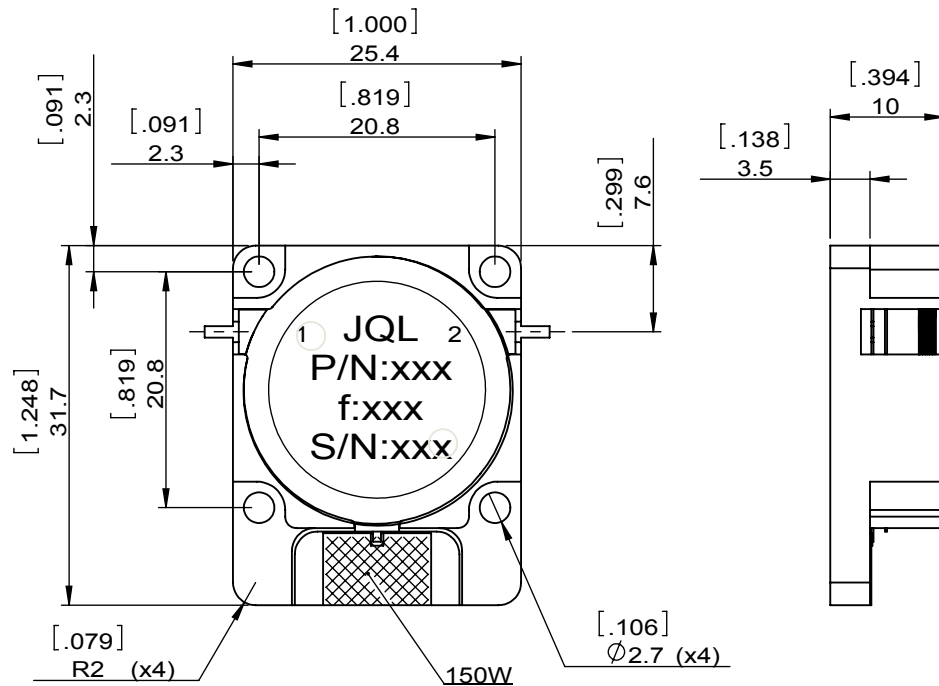

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL	JQL Electronic Inc		500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA		Tel: 1(888)236-9828 Fax: 1(888)823-2902	
	MATERIAL: STEEL		DWG NO: JID0900T0960M10			
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	C.G	05.05.10	SACLE	
DESCRIPTION: DROP IN ISOLATOR		CHK'D BY:				3:2
		APPV'D BY:				
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:		A4