



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		ZC.Wu	06.11.2014	David			

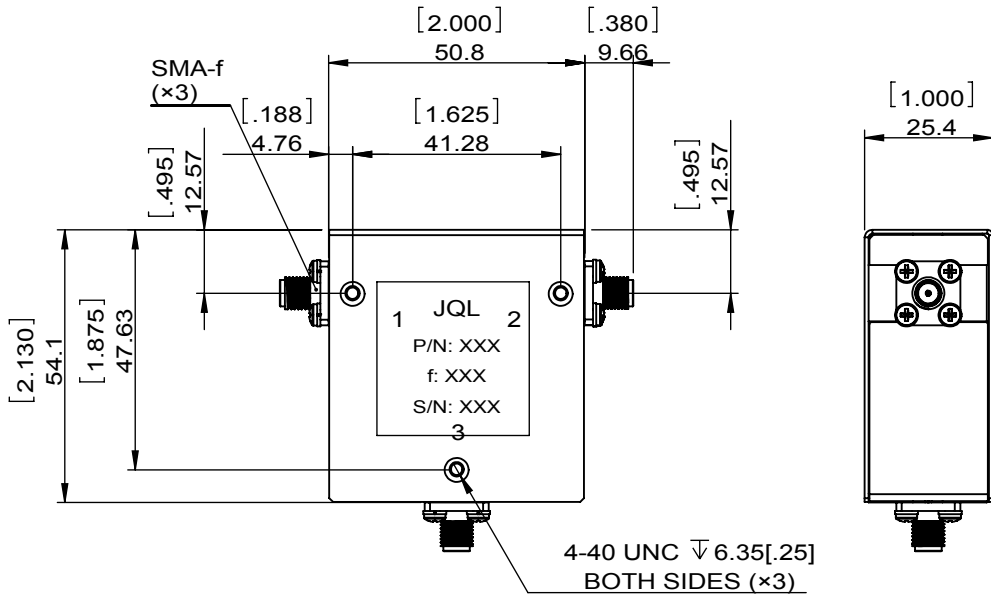

SPECIFICATIONS	
Part's Number	JCC1350T2700S2
Frequency(GHz)	1.350~2.700
Direction	-
Insertion Loss(dB)MAX	0.6 ( 0.7 -30C~-40C)
Isolation(dB)MIN	17.0 (15 -30~40C)
Return Loss(dB)MIN	17.0 (15 -30~40C)
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	20/20/-
Operating Temperature( $^{\circ}$ C)	-40~85
Storage Temperature( $^{\circ}$ C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W $\times$ LG $\times$ THK)(mm[Inch])	-
Additional Notes	-

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> JCC1350T2700S2		
<b>SURFACE TREATMENT:</b> NICKEL PLATING		DWG BY:	ZC.Wu	06.11.2014
<b>DESCRIPTION:</b> COAX CIRCULATOR		CHK'D BY:		SACLE
		APP'V'D BY:		2:3
		Unit: mm[inch]	Tolerance: Liner: $\pm$ 0.25 Anguar: $\pm$ 0.5 $^{\circ}$	The First: 
				A4

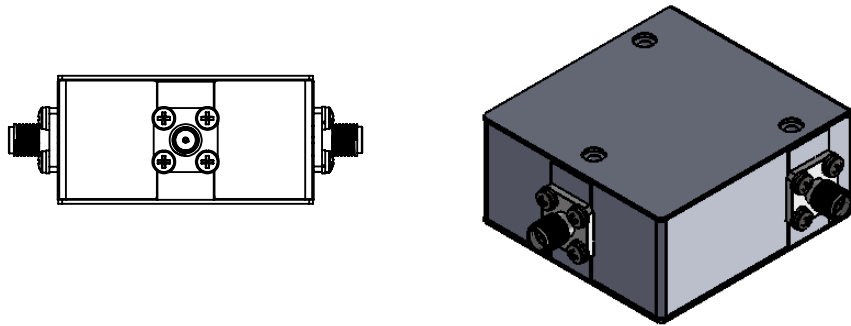

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.