

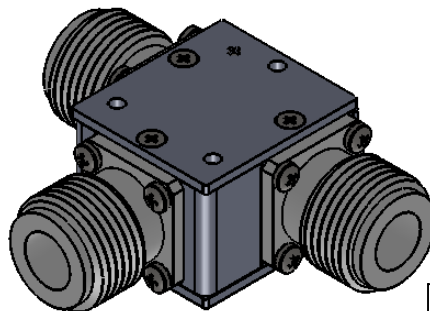


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		ZC.Wu	09.11.2014	David			

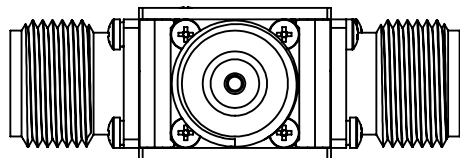

SPECIFICATIONS	
Part's Number	JCC1500T2000N20
Frequency(GHz)	1.500~2.000
Direction	-
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	19.0
Return Loss(dB)MIN	19.0
3rd IMD(dBc)MAX	-
Power FWD/REV/CW(Watt)	200/200/-
Operating Temperature(°C)	-20~+75
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

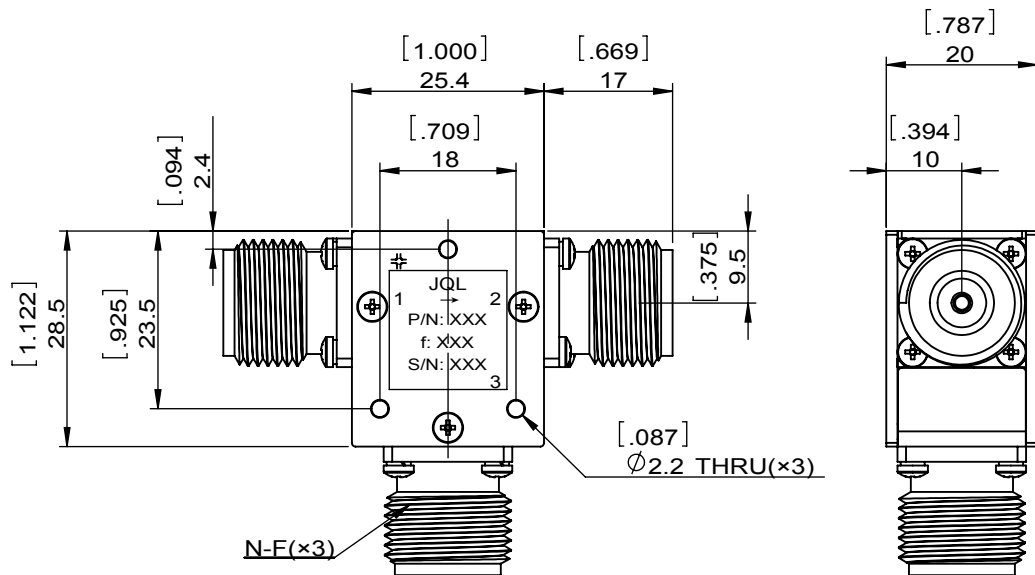

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc					
MATERIAL: STEEL		DWG NO: JCC1500T2000N20			
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	ZC.Wu	09.11.2014	SCALE
DESCRIPTION: COAXIAL CIRCULATOR		CHK'D BY:			1:1
		APPV'D BY:			
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 	A4