



1		2		3		4		5		6	
Document No.		QR4-700-T-003		REV.		DESCRIPTION		REVISER		DATE	
REV.		A/0		0				ZQ.Hou		10.15.2015	
								APPROVED		David	

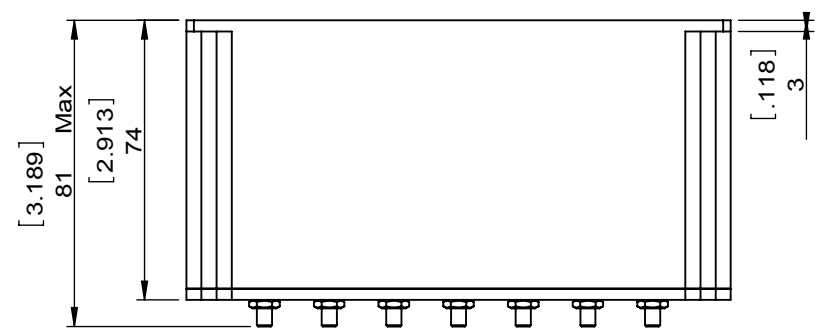

ITEM	SPECIFICATIONS	
Frequency range(MHz)	890~915	935~960
Insertion Loss(dB)	1.0 Max	
Rejection(dBc)	40 Min@935~960Mhz	40 Min@890~915Mhz
Return Loss(dB)	14Min	
Impedance(Ω)	50	
Power(W)	50 Min CW	
Temperature(°C)	-40~+85	
Connector	SMA FEMALE	
Notes		

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> JFCD0890T0960SF-R1		
<b>SURFACE TREATMENT:</b> Painted black		DWG BY:	ZQ.Hou	10.15.2015
<b>DESCRIPTION:</b> Diplexer		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4

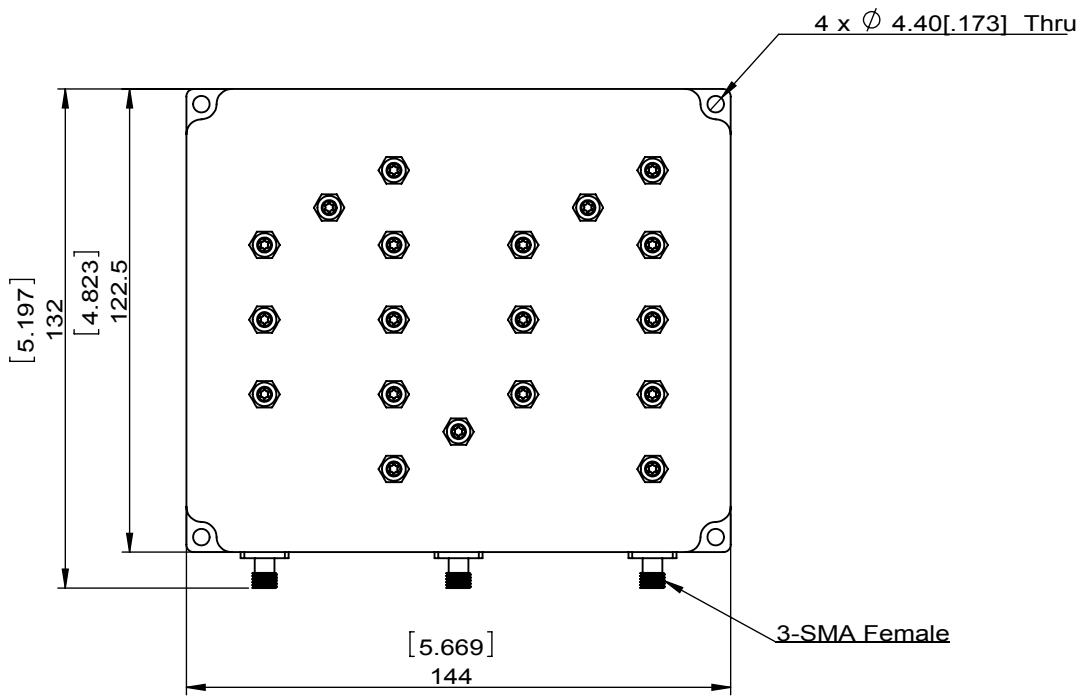

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.