


5		6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVE

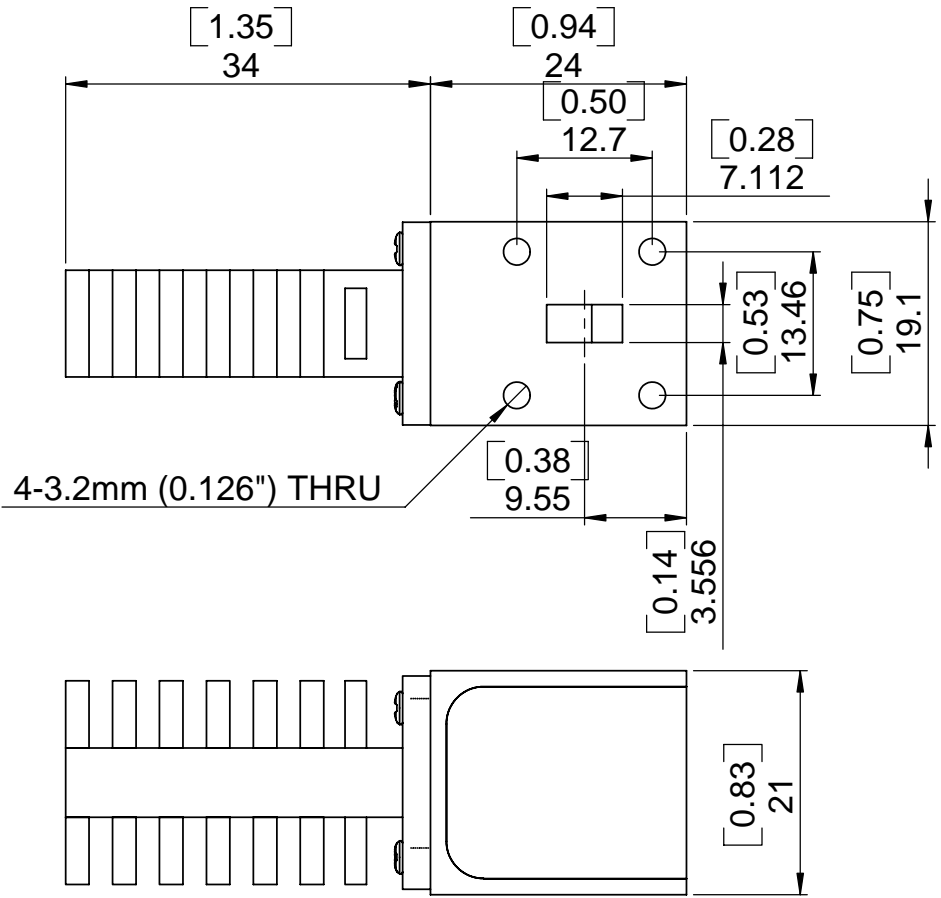

SPECIFICATIONS

P/N: JIWR28-21B-29K0T30K0-HP
 FREQ: 29~30GHz

ISOLATION: 22dB MIN
 INS LOSS: 0.35dB MAX
 VSWR: 1.2:1MAX
 PWR FWD/REV: 25W AVG/25W
 WAVEGUIDE: WR28
 TEMP: -40C~+85C

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc 500 Lake Cook Road, Suite 350 Tel : 1(888)236-9828
 Deerfield, IL 60015, USA Fax: 1(630)823-2902

MATERIAL:	DWG NO.			
	JIWR28-21B-29K0T30K0-HP			
SURFACE TREATMENT:	NAME	DATE	SIGNATURE	REV:
	DWG BY: SY			0
	CHK'D BY: GC			
	APPV'D BY: JZ			
DESCRIPTION:	TOLERANCE		Q.A	
WAVEGUIDE ISO	Liner: ±0.1mm Angular: ±0.5°			A4