


REV.	DESCRIPTION	REVISOR	DATE	APPROVE

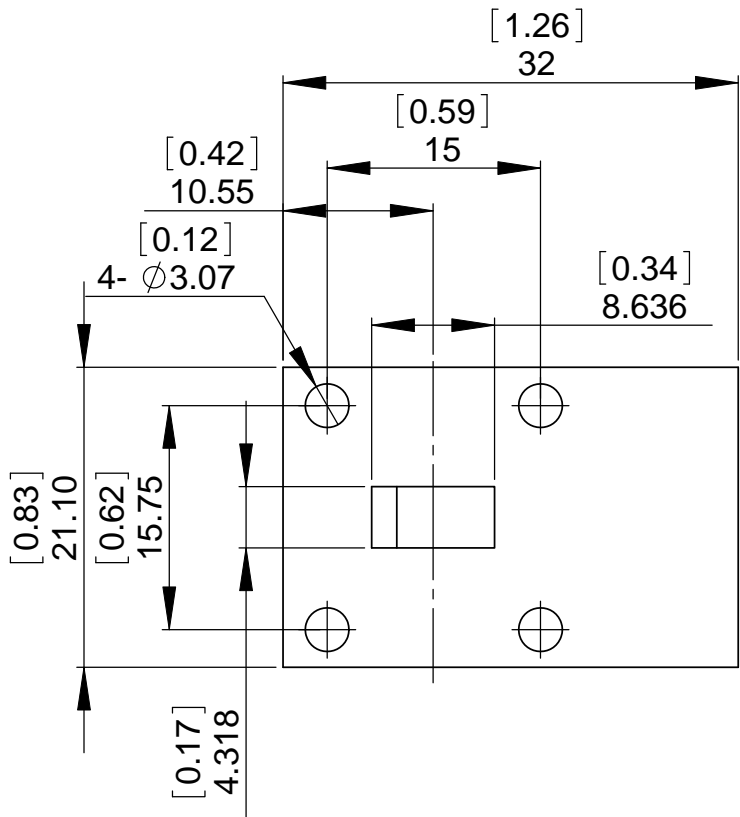

**SPECIFICATIONS**

P/N: JIWR34-12.7S-27KOT30K0  
 FREQ: 27.00~30.00GHZ

ISOLATION: 20dB MIN  
 INS LOSS: 0.40dB MAX  
 RETURN LOSS: 20dB MIN  
 PWR: 1 W  
 FLANGE: WR34  
 TEMPERATURE OPERATING: -30C~+70C  
 STORAGE: -40C~+85C

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

**JQL JQL Electronic Inc** 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel : 1(888)236-9828 Fax: 1(630)823-2902

MATERIAL: <b>ALUM</b>	DWG NO. <b>JIWR34-12.7S-27KOT30K0</b>			
SURFACE TREATMENT:				
DESCRIPTION: <b>WAVEGUIDE ISOLATOR</b>	NAME	DATE	SIGNATURE	REV:
	DWG BY: <b>SY</b>	<b>07.01.09</b>		
	CHK'D BY: <b>GC</b>	<b>07.01.09</b>		
	APPV'D BY: <b>JZ</b>	<b>07.01.09</b>		
	TOLERANCE Liner: ±0.1mm Angular: ±0.5°		Q.A	A4