

1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZQ.Hou	05.25.2015	David					

A

B

C


D

A

B

C

D

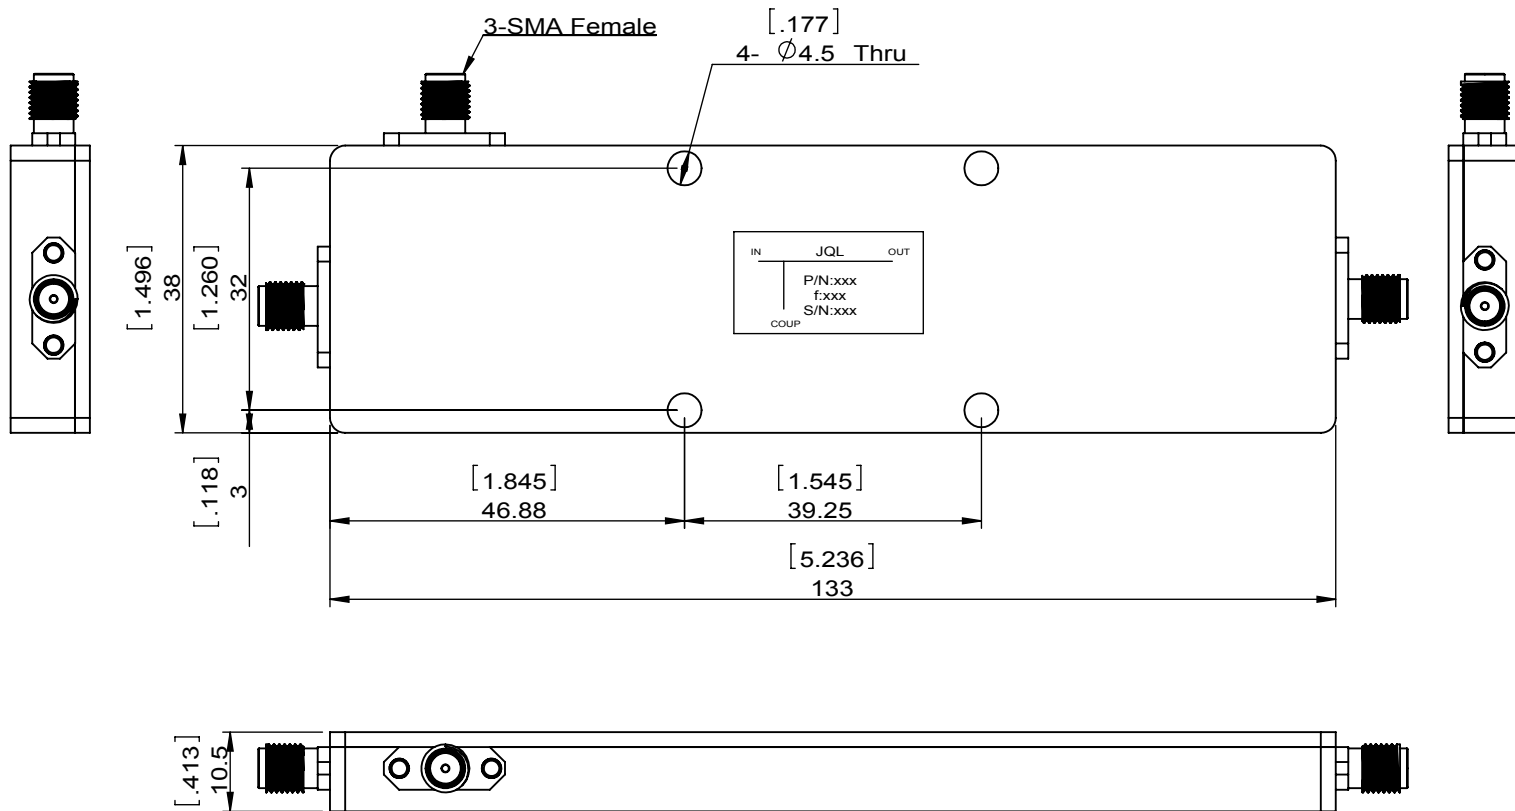

ITEM	SPECIFICATIIONS
Frequency(MHz)	400~3000
Insetion Loss(dB)	1.2 Max
Couling(dB)	10±1
Return Loss(dB)	16Min
Impedance(Ω)	50
Power(dBm)	10~15
Temperature(°C)	-10~50
Connector	SMA FEMALE
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: DC0400T3000SF		
SURFACE TREATMENT: CHEM FILM		DWG BY:	ZQ.Hou	05.25.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes
or communicated to third party as a whole or partly,
without the written consent of JQL Electronic Inc.