
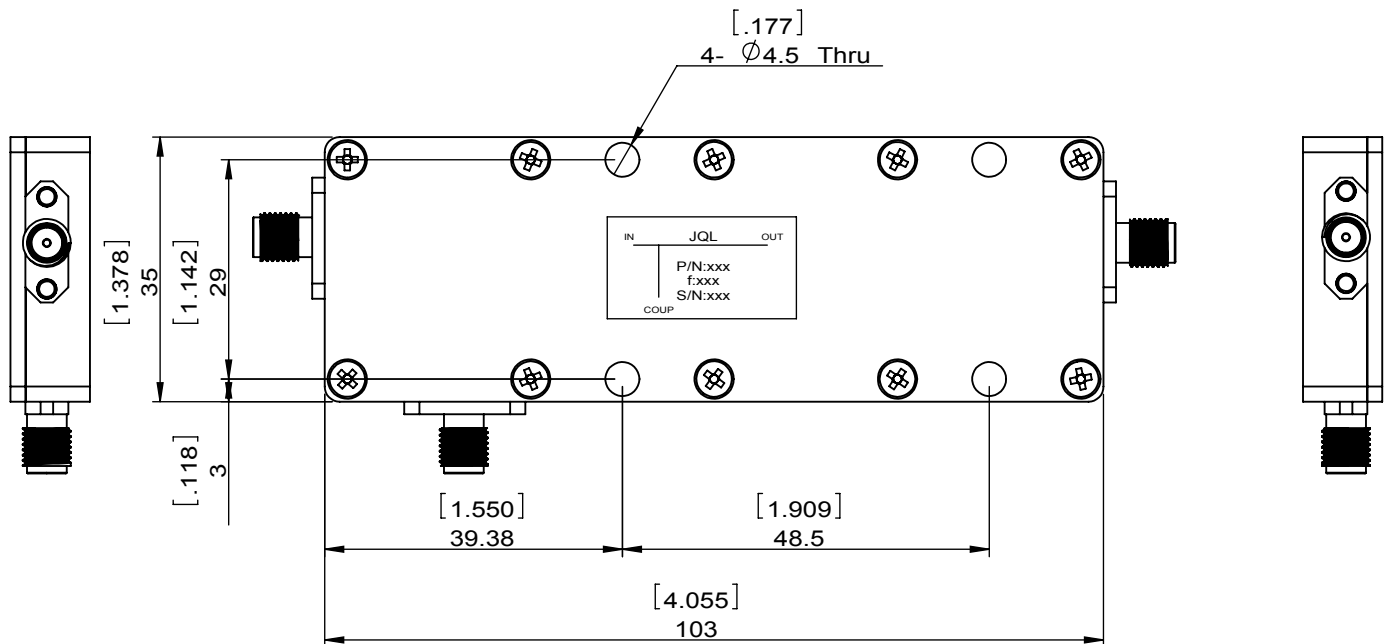


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				ZQ.Hou	03.25.2015	David			

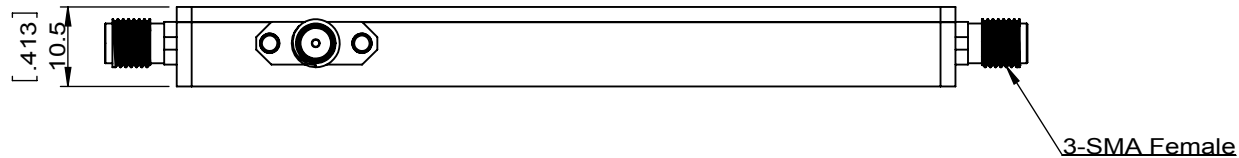

ITEM	SPECIFICATIIONS
Frequency(MHz)	950~2150
Insetion Loss(dB)	0.2 Max
Couling(dB)	30±1
Return Loss(dB)	20Min
Impedance(Ω)	50
Temperature($^{\circ}$ C)	-10~50
Connector	SMA FEMALE
Notes	


JQL JQL Electronic Inc

MATERIAL:	DWG NO: DC0950T2150-30DB-SF			
SURFACE TREATMENT: CHEM FILM	DWG BY:	ZQ.Hou	03.25.2015	SCALE
	CHK'D BY:			
DESCRIPTION: FILTER	APPV'D BY:			1:1
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No. QR4-700-T-003								REV. DESCRIPTION REVISOR DATE APPROVED			
REV. A/0								0		ZQ.Hou 03.25.2015 David	

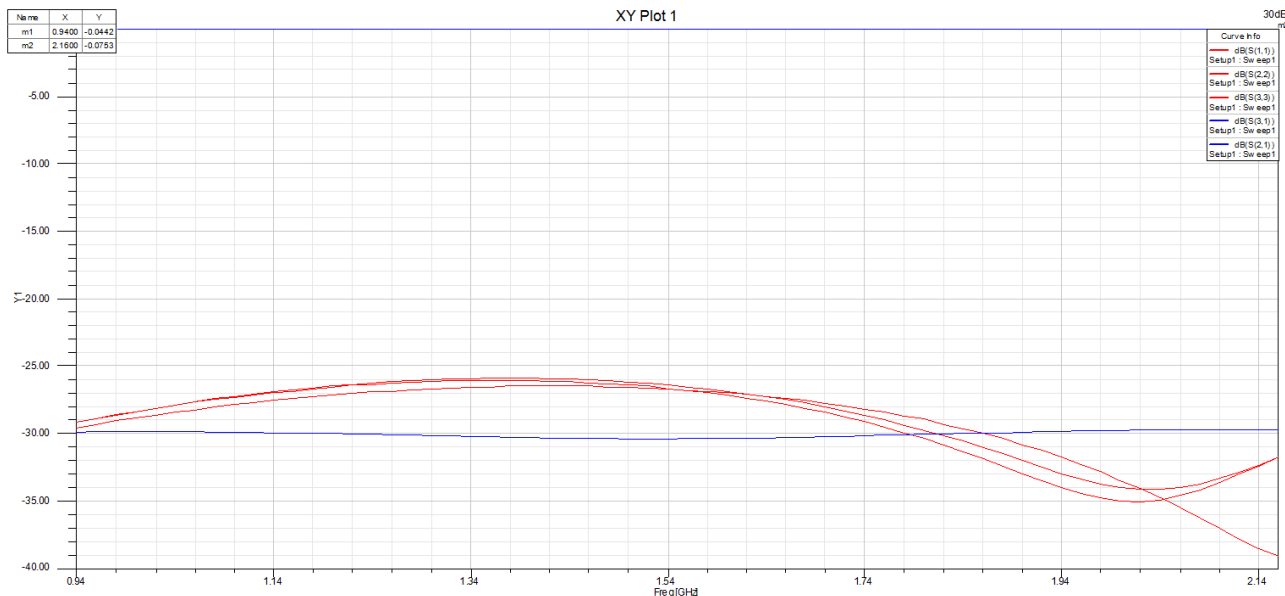

ITEM	SPECIFICATIONS
Frequency(MHz)	950~2150
Insetion Loss(dB)	0.2 Max
Couling(dB)	30±1
Return Loss(dB)	20Min
Impedance(Ω)	50
Temperature(°C)	-10~50
Connector	SMA FEMALE
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: DC0950T2150-30DB-SF		
SURFACE TREATMENT: CHEM FILM		DWG BY:	ZQ.Hou	03.25.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.