


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		YQ.XIE	09.22.2015	David					



SPECIFICATIONS	
Part's Number	JC2S8000T12K0G2
Frequency(GHz)	8.000~12.000
Direction	
Insertion Loss(dB)MAX	0.5(2->1); 1.0(1->3)
Isolation(dB)MIN	12(1->2); 16(3->2); 30(3->1)
Return Loss(dB)MIN	14.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	20/20/-
Operating Temperature(°C)	-55~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	20
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	GWB

JQL JQL Electronic Inc				
MATERIAL: -		DWG NO: JC2S8000T12K0G2		
SURFACE TREATMENT: -		DWG BY:	YQ.XIE	09.22.2015
DESCRIPTION: MICROSTRIP ISOLATEOR		CHK'D BY:		SCALE
		APPV'D BY:		4:1
Unit:	Tolerance:	The First:		A4
mm[inch]	Liner: ±0.25 Anguar: ±0.5°			

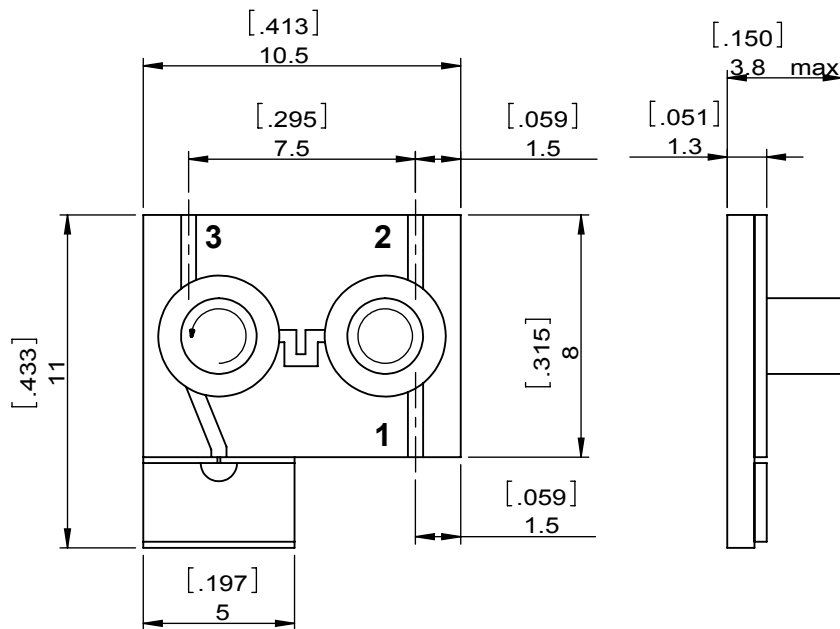

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.