


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LJ.Zhang	DATE	07.13.2015	APPROVED	David



SPECIFICATIONS	
Part's Number	JC2S8400T11K0G1
Frequency(GHz)	8.400~11.00
Direction	-
Insertion Loss(dB)MAX	0.6 @ Port1 to Port2 1.2 @ Port2 to Port3 0.7 @ Port1 to Port2@-30°C~+75°C 1.4 @ Port2 to Port3@-30°C~+75°C
Isolation(dB)MIN	16 @ Port3 to Port1 30 @ Port3 to Port2 15@ Port3 to Port1@-30°C~+75°C 28 @ Port3 to Port2@-30°C~+75°C
Return Loss(dB)MIN	17.7 16.5@-30°C~+75°C
Peak Power(Watt)	10@30% Duty Cycle:Loss 0.6dB 10@30% Duty Cycle:Loss 0.75dB 10@30% Duty Cycle:Loss 0.9dB
Reverse Power(Watt)	10
Operating Temperature(°C)	-30~+75
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JC2S8400T11K0G1		
SURFACE TREATMENT:		DWG BY:	LJ.Zhang	07.13.2015
DESCRIPTION: MICROSTRIP CIRCULATOR		CHK'D BY:		SCALE
		APPV'D BY:		3:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

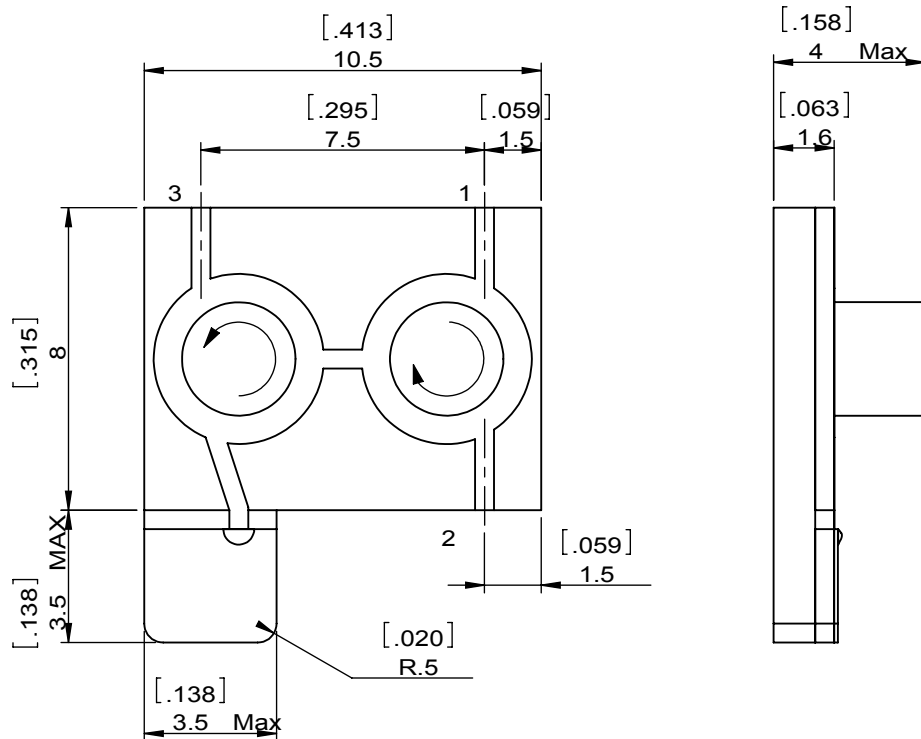

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.