




1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				ZC.Wu	09.03.2014	David			



SPECIFICATIONS	
Part's Number	JCM0699T0787PN1
Frequency(GHz)	0.699~0.787
Direction	
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	10/10/-
Operating Temperature(°C)	-40~85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

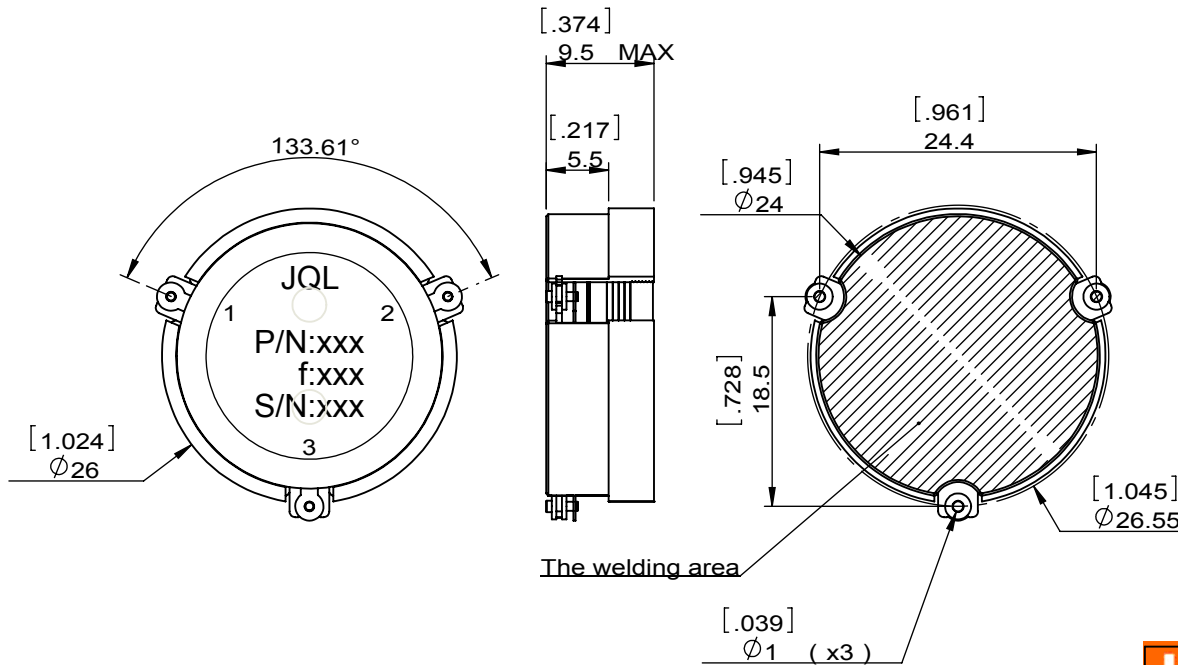

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

**JQL JQL Electronic Inc**

**MATERIAL:**  
STEEL

**SURFACE TREATMENT:**  
NICKLE PLATING

**DESCRIPTION:**  
SMT CIRCULATOR

**DWG NO:**  
JCM0699T0787PN1

DWG BY: ZC.Wu 09.03.2014 SCALE

CHK'D BY:

APP'VD BY: 3:2

Unit: mm[inch] Tolerance: Liner:  $\pm 0.25$  Anguar:  $\pm 0.5^\circ$  The First: A4