

7.1Ghz~8.5Ghz Band Surface Mount Circulator

JCM7100T8500VM0R

Description:





JCM7100T8500VM0R is a surface mount circulator in the frequency 7.100~8.500GHz. The device is extremely stable over the temperature range of -30°C to +75°C, with maximum insertion loss of 0.5dB and minimum return loss of 18.0dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of 5/5/-

Electrical Specification

Part Number	JCM7100T8500VM0R
Frequency (MHz)	7.100~8.500
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-30°C~+75°C
Power FWD/REV/PK(Watt)	5/5/-


Outline

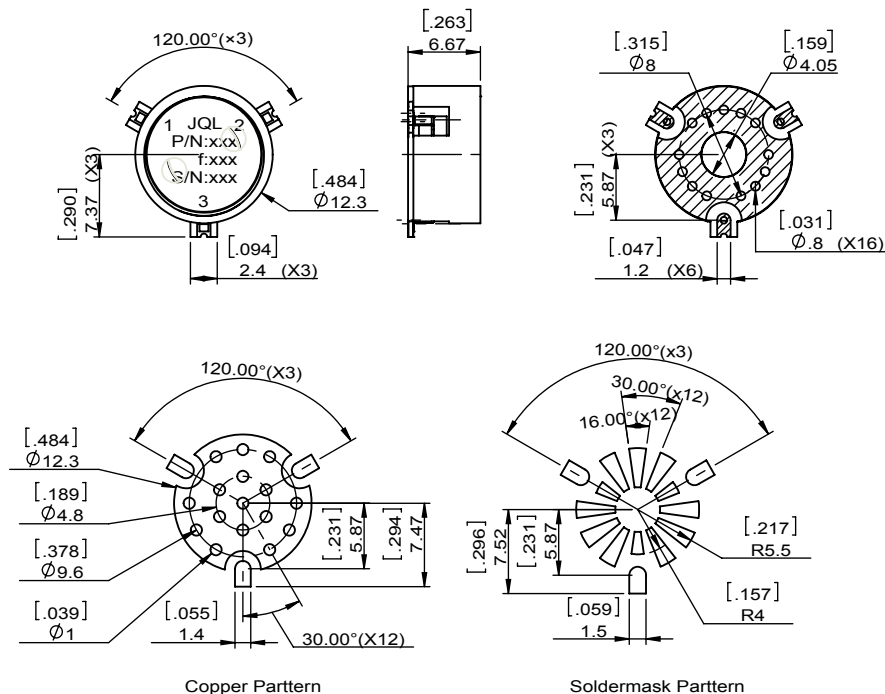

7.1GHz~8.5GHz Band Surface Mount Circulator

JCM7100T8500VM0R

Test Data

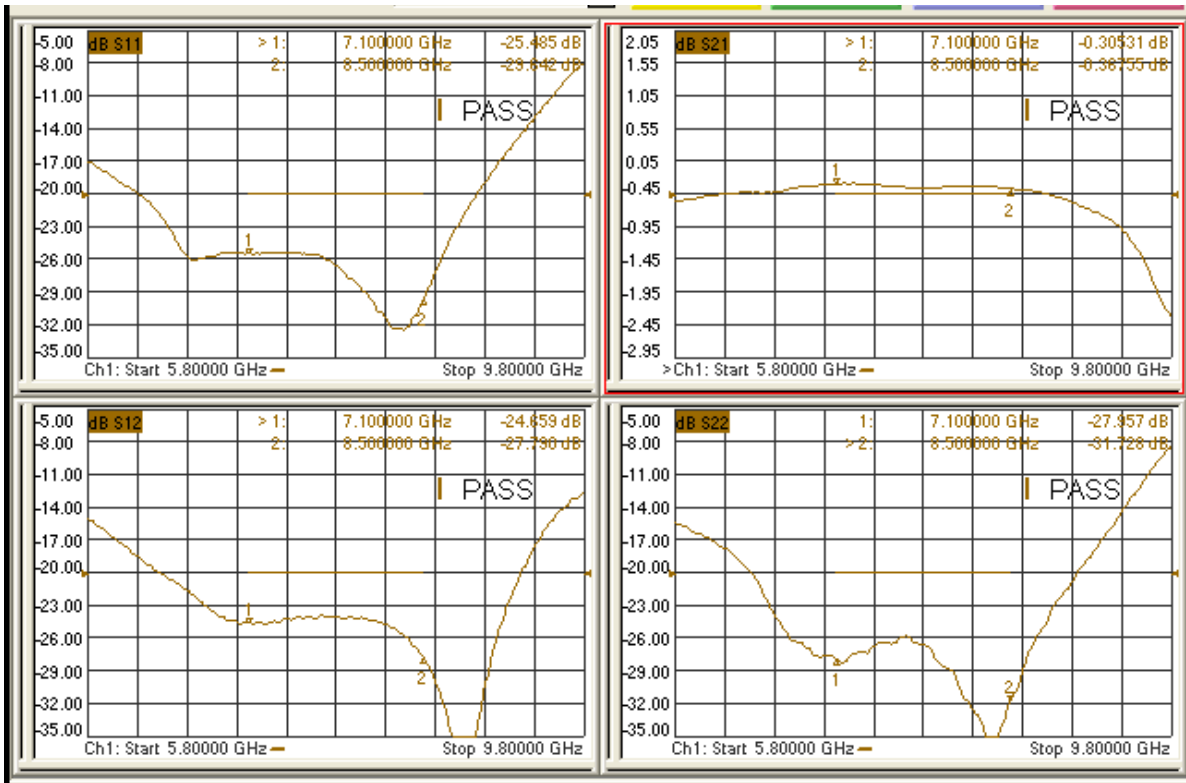

Applications

- Radio Link