


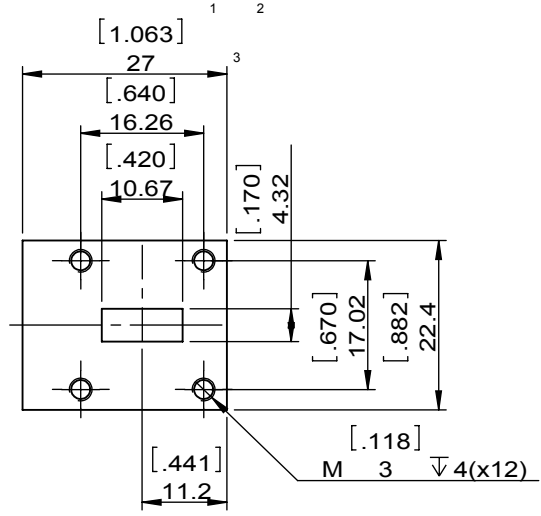


P/N:xxx  
E:xxx  
S/N:xxx

1 2 3 4 5 6

Document No.	QR4-700-T-003
REV.	A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		ZC.Wu	08.03.2015	David



SPECIFICATIONS	
Part's Number	JCWR42-24-21K0T22K5
Frequency(GHz)	21.00~22.50
Direction	CW
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	10/10/-
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b> ALUM		<b>DWG NO:</b> JCWR42-24-21K0T22K5		
<b>SURFACE TREATMENT:</b> CHEM FILM		DWG BY:	ZC.Wu	08.03.2015
<b>DESCRIPTION:</b> WAVE GUIDE CIRCULATOR		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1 2 3 4 WEIGHT: 5 SHEET 1 OF 1