




5					6
REV.	DESCRIPTION	REVISOR	DATE	APPROVE	

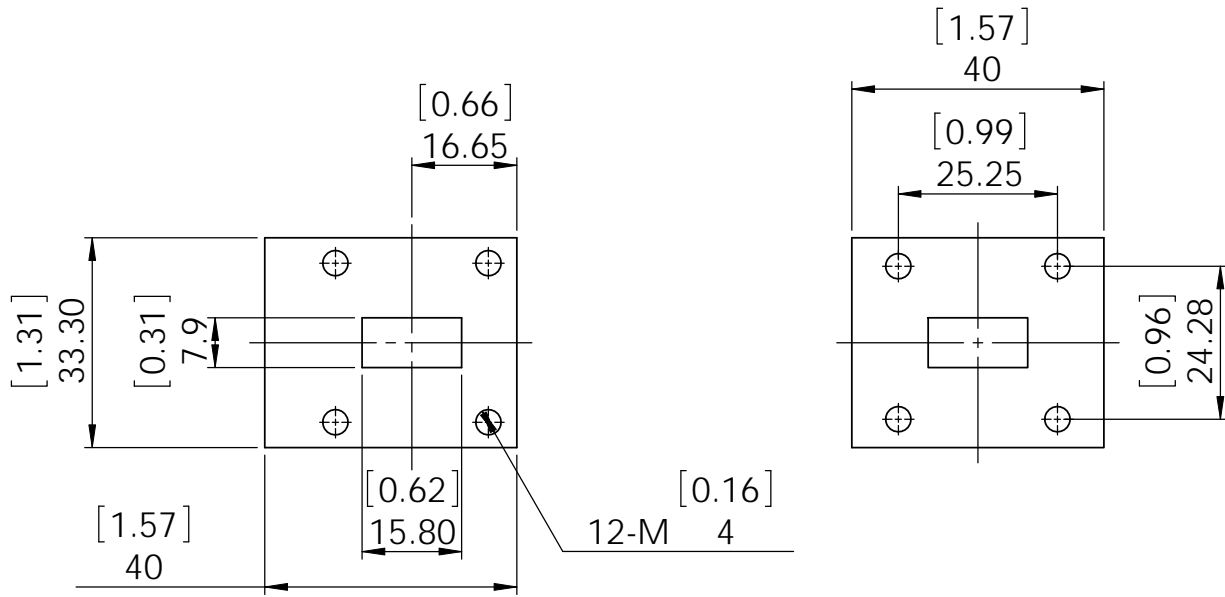

### SPECIFICATIONS

P/N: JCWR62-40-TBD  
 FREQ: 12.40~18.00GHz  
 Bandwidth Up To 30%

ISOLATION: 25dB MIN  
 INS LOSS: 0.3dB MAX  
 VSWR: 1.20:1 MAX  
 PWR: 10W  
 TEMP: -40C~+85C  
 WAVEGUIDE: WR62

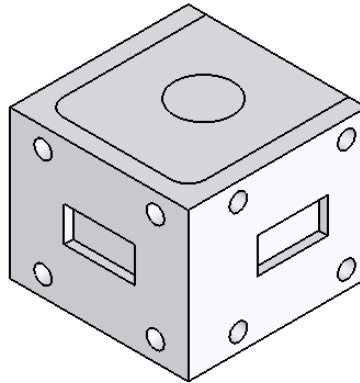

This document is the property of JQL Electronic Inc.  
 It cannot be copied, duplicated, used for manufacturing purposes  
 or communicated to third party as a whole or partly,  
 without the written consent of JQL Electronic Inc.

<b>JQL JQL Electronic Inc</b>		500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA		Tel : 1(888)236-9828 Fax: 1(630)823-2902	
MATERIAL:		DWG NO. JCWR62-40-TBD			
SURFACE TREATMENT:		NAME		DATE	SIGNATURE
DESCRIPTION:		DWG BY: SY			REV: 0
WAVEGUIDE CIRCULATOR		CHK'D BY: GC			
		APPV'D BY: JZ			
		TOLERANCE Liner: ±0.1mm Angular: ±0.5°		Q.A	A4