


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				ZQ.Hou	12.16.2014	David			

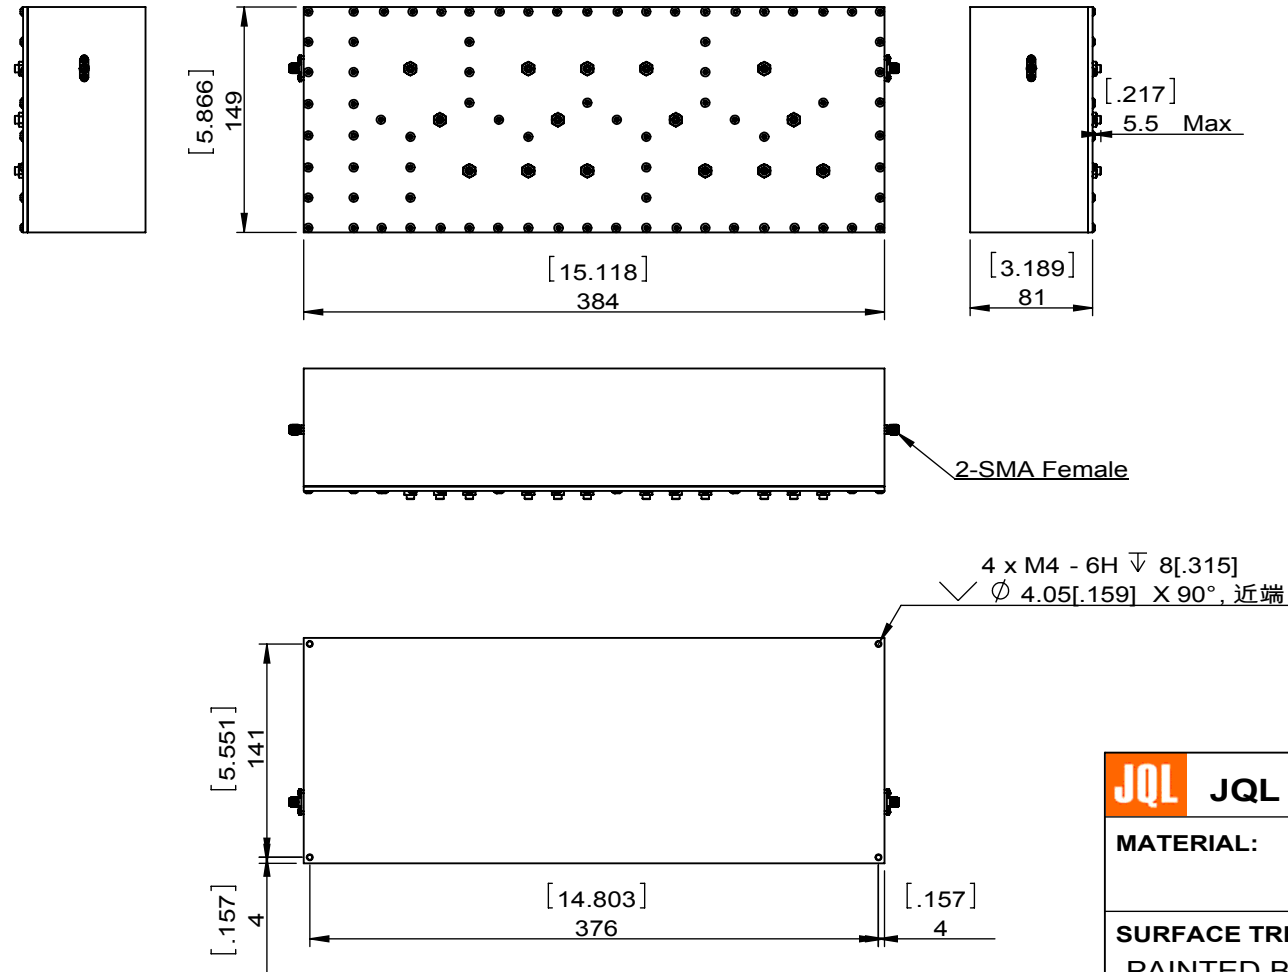

ITEM	SPECIFICATIONS
Frequency(MHz)	224~303
Insetion Loss(dB)	0.8 Max
Ripple(dB)	±0.5 Max
Reject(dB)	40 Min@0-200Mhz 30 Min@322-400Mhz 40 Min@400-4000Mhz
Return Loss(dB)	15.6Min
Power Handling(W)	25 CW with VSWR 10:1
Temperature(°C)	-40~+70
Vibration	13.7 G RMS Random @ 0 - 2000 Hz 8 G max Sinusoidal @ 100 - 440 Hz 6 G max Sinusoidal @ 440 - 1000 Hz
Shock	All Axis 20 G / 0.011 Sec
Height(Kft)	40
Connector	SMA FEMALE
Notes	

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> JFCB0224T0303SF-R		
<b>SURFACE TREATMENT:</b> PAINTED BLACK		DWG BY:	ZQ.Hou	12.16.2014
<b>DESCRIPTION:</b> UNF Band Pass Filter		CHK'D BY:		SCALE
		APPV'D BY:		1:5
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:		A4

**RoHS COMPLIANCE** This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.