


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZQ.Hou		06.08.2015		David			

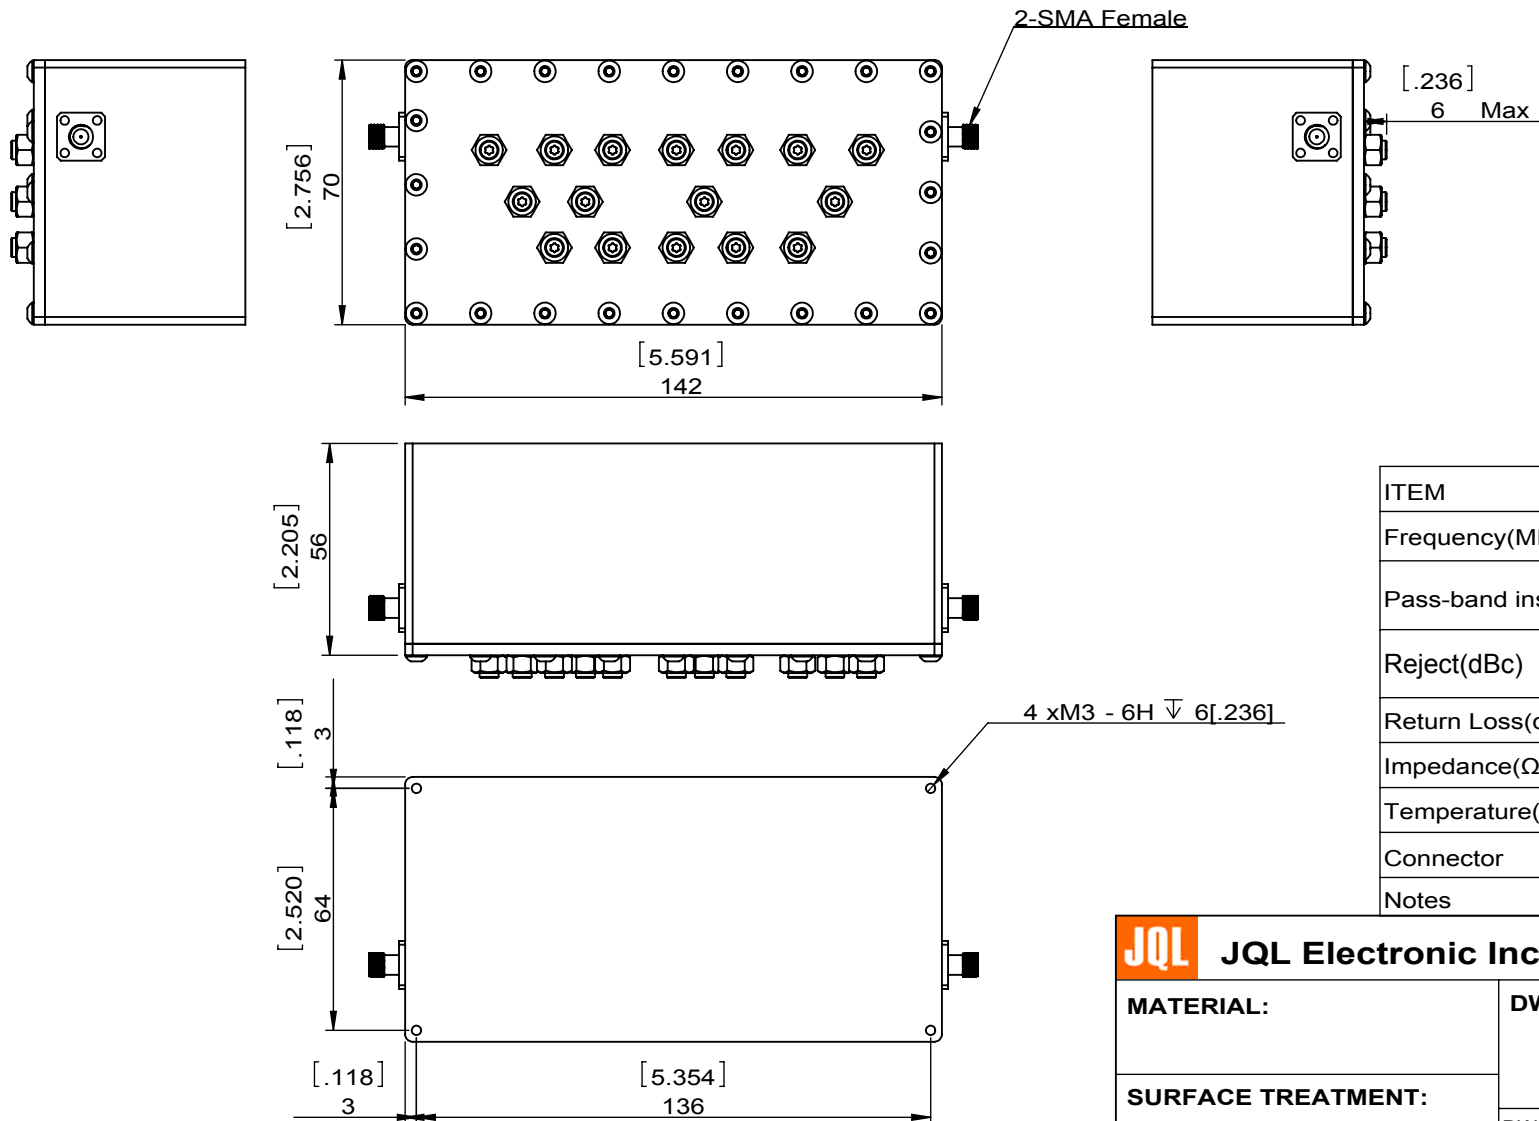

ITEM	SPECIFICATIONS
Frequency(MHz)	574.5~775.5
Pass-band insertion Loss(dB)	2.0 Max
Reject(dBc)	60 @860Mhz 60 @388Mhz
Return Loss(dB)	14Min Typ
Impedance(Ω)	50
Temperature(°C)	-31~+70
Connector	SMA FEMALE
Notes	

JQL JQL Electronic Inc

MATERIAL: _____ **DWG NO:** JFCB0574T0776SF

SURFACE TREATMENT: PAINTED BLACK


DESCRIPTION: FILTER

DWG BY:	ZQ.Hou	06.08.2015	SCALE
CHK'D BY:			
APPV'D BY:			1:2
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

RoHS COMPLIANCE

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No. QR4-700-T-003		REV. A/0		REV. 0		DESCRIPTION		REVISOR ZQ.Hou		DATE 06.08.2015	
										APPROVED David	

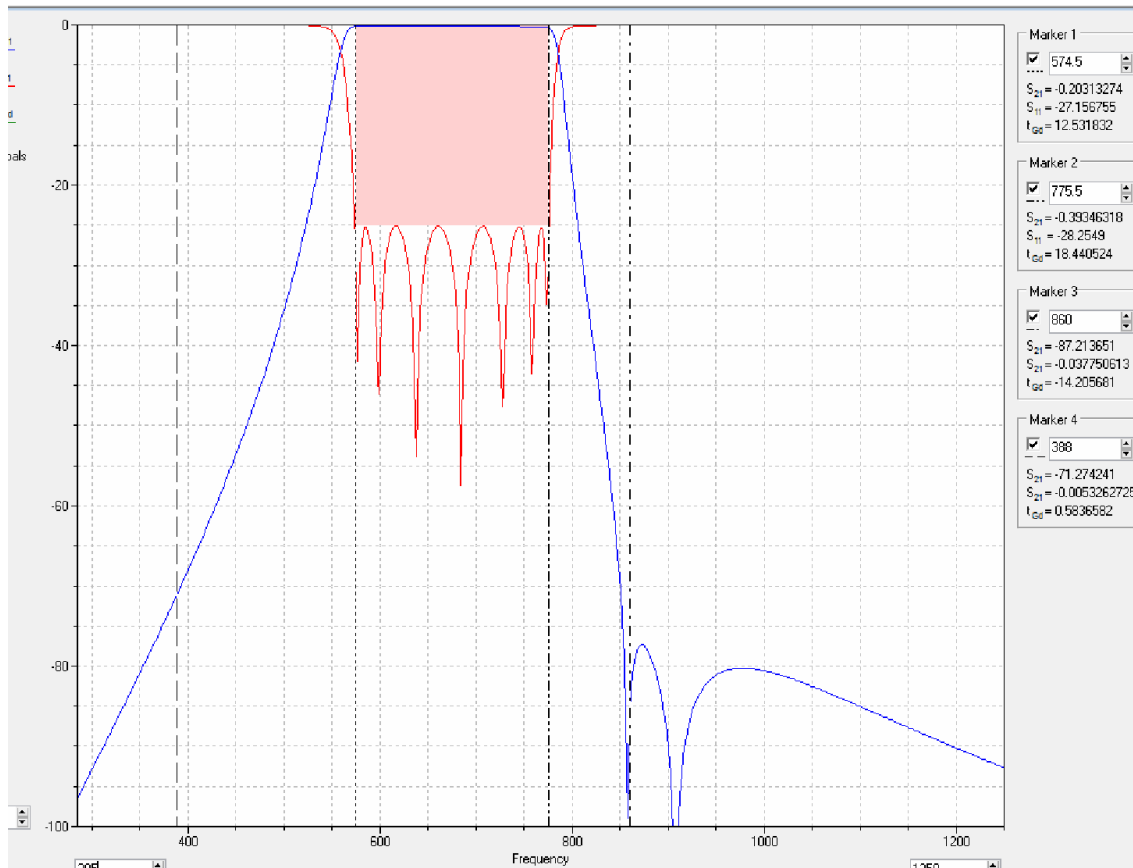

ITEM	SPECIFICATIONS
Frequency(MHz)	574.5~775.5
Pass-band insertion Loss(dB)	2.0 Max
Reject(dBc)	60 @860Mhz 60 @388Mhz
Return Loss(dB)	14Min Typ
Impedance(Ω)	50
Temperature(°C)	-31~+70
Connector	SMA FEMALE
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB0574T0776SF		
SURFACE TREATMENT: PAINTED BLACK		DWG BY:	ZQ.Hou	06.08.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.