| Document No. | QR4-700-T-003 |
|---|---|
| REV. | A/0 |

| REV. | DESCRIPTION | REVISOR | DATE | APPROVED |
|---|---|---|---|---|
| 0 | | LJ.Zhang | 08.04.2014 | David |

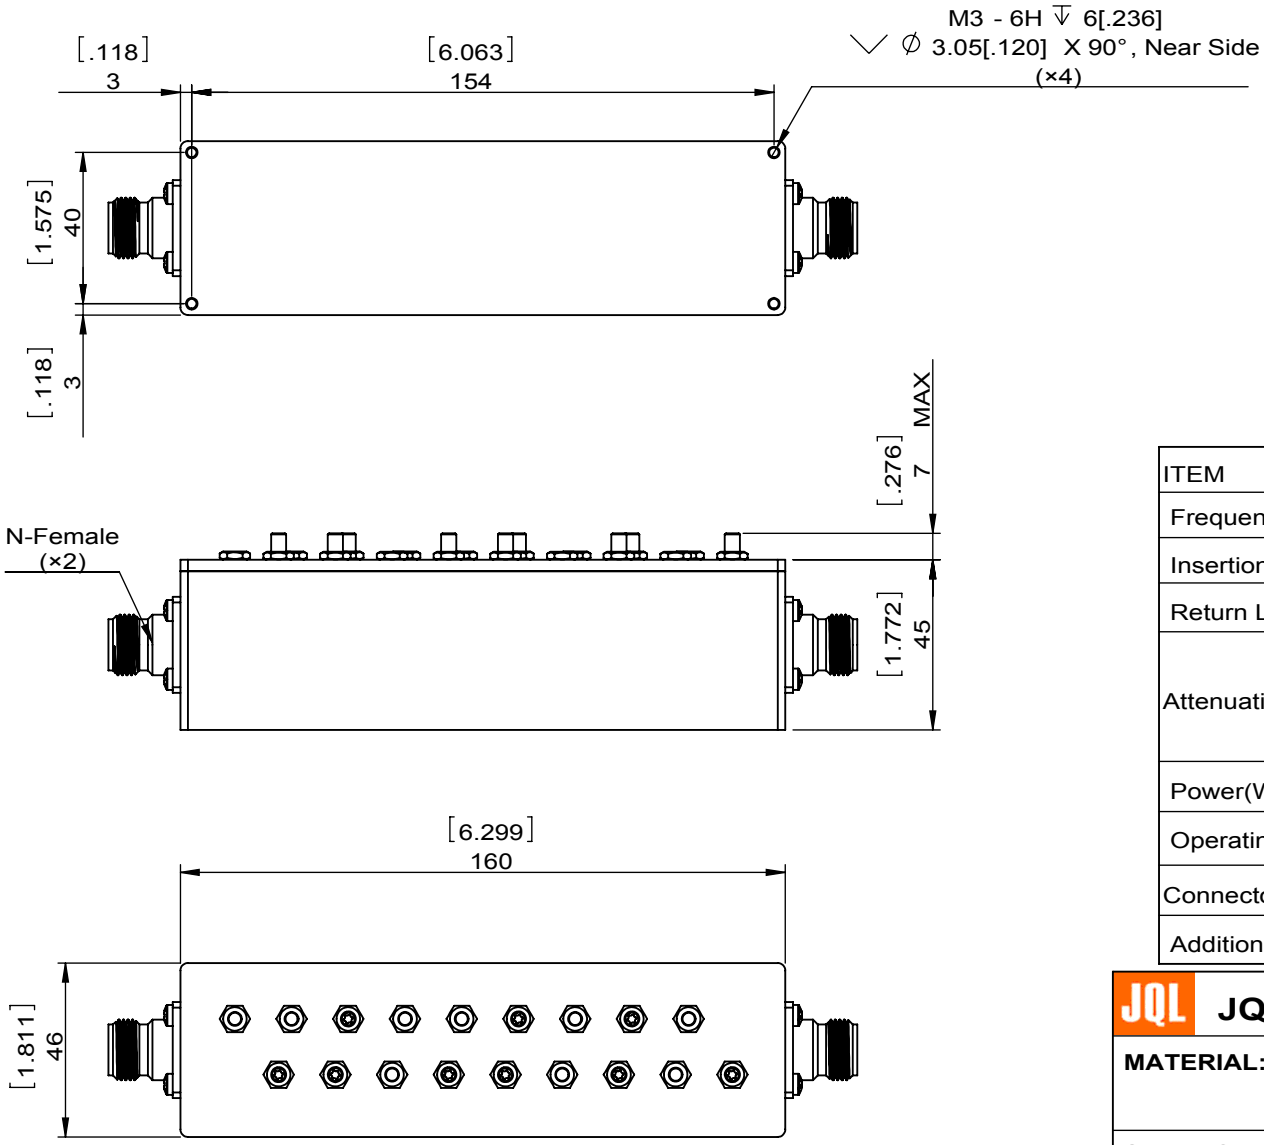


| ITEM | SPECIFICATIONS |
|---|---|
| Frequency(MHz) | 760~945 |
| Insertion Loss(dB) | 0.5 Max. |
| Return Loss(dB) | 20 Min. |
| Attenuation(dB) | 60Min@1520~1890 MHz<br>50Min@2280~2835 MHz<br>40Min@3000~4000 MHz |
| Power(Watt) | 10 Max |
| Operating Temperature(°C) | 10~30 |
| Connector | N-Female |
| Additional Notes | - |

**JQL Electronic Inc**

**MATERIAL:**

**DWG NO:** JFCB0760T0945NF

**SURFACE TREATMENT:** PAINTED BLACK

**DESCRIPTION:** FILTER

| | | | |
|---|---|---|---|
| DWG BY: | LJ.Zhang | 08.04.2014 | SCALE |
| CHK'D BY: | | | 1:2 |
| APPV'D BY: | | | |
| Unit: mm[inch] | Tolerance: Liner: ±0.25 Anguar: ±0.5° | The First: | A4 |

RoHS COMPLIANCE

This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

WEIGHT:

SHEET 1 OF 1