


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZQ.Hou	03.26.2015	David					



ITEM	SPECIFICATIONS
Tunable Frequency range(MHz)	960~1215
Insetion Loss(at Fc)(dB)	1.8 max (1.5 normal)
3 dB BW (MHz)	6~10
Attenuation(dB)	More than 75.5@ Fc +/- 126MHz (76 target)
Return Loss(dB)	10.9Min(14 normal)
Frequency accuracy	about 0.05mm/1MHz (design)
Impedance(Ω)	50
Temperature($^{\circ}\text{C}$)	-20~+55
Weight(g)	< 630
Connector	SMA FEMALE
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB0960T1215SF		
SURFACE TREATMENT: SLIVER PLATING		DWG BY:	ZQ.Hou	03.26.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ± 0.25 Anguar: $\pm 0.5^{\circ}$	The First:
				A4

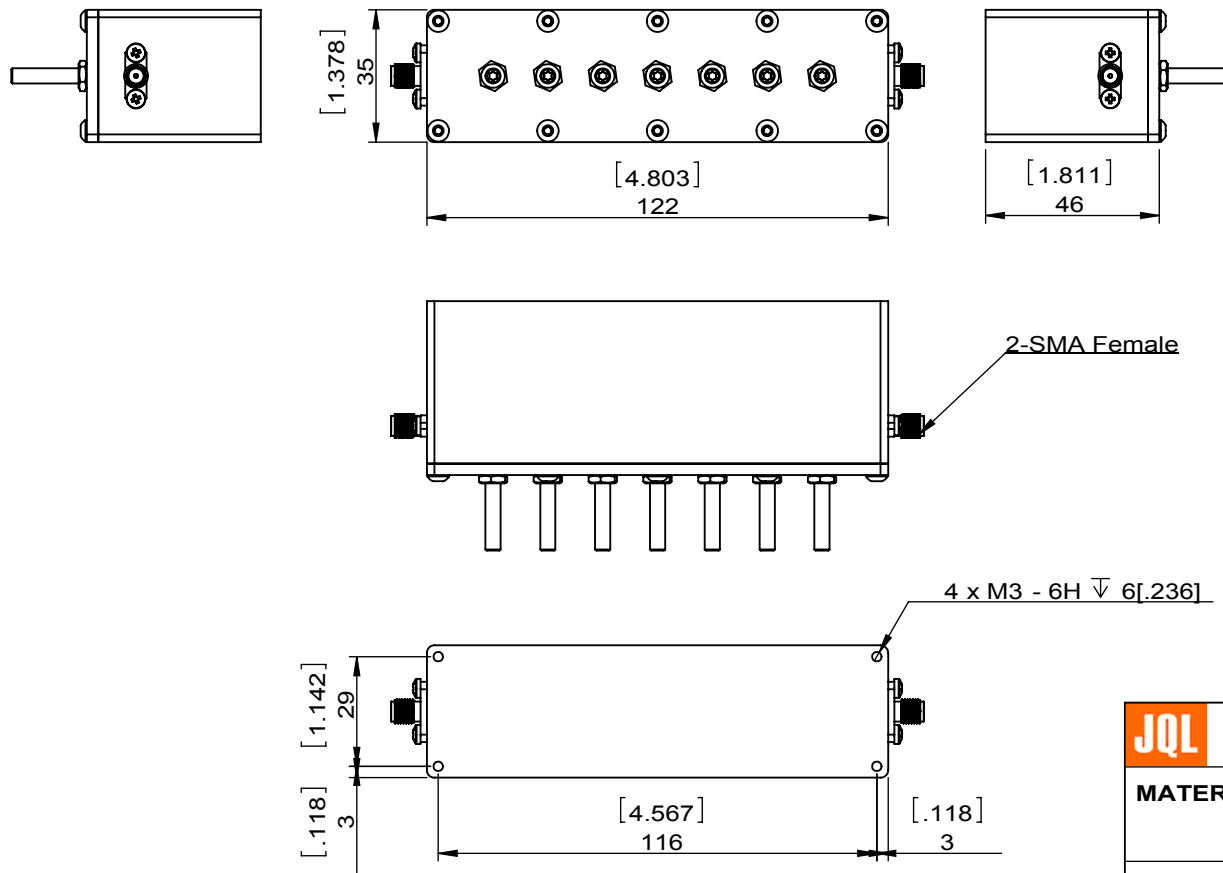

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.