


1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV.		A/0						REVISOR		DATE	
								ZQ.Hou		06.24.2015	
										APPROVED	
										David	



ITEM	SPECIFICATIONS
Frequency(GHz)	10.8~11
BW(MHz)	200 @1.0dB
Insertion Loss(dB)	2 Max
Ripple(dB)	1 ptp Max
Reject(dBc)	-50 @ > 10.6GHz -50 @ < 11.2GHz
Return Loss(dB)	15.6Min
Impedance(Ω)	50
Input Power(dBm)	+44@ < 10.6GHz and > 11.2GHz +33 in band
Temperature(°C)	-20~+55
Connector	SMA FEMALE(4 screw)
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB10K8T11K0SF		
SURFACE TREATMENT: Ag plating		DWG BY:	ZQ.Hou	06.24.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

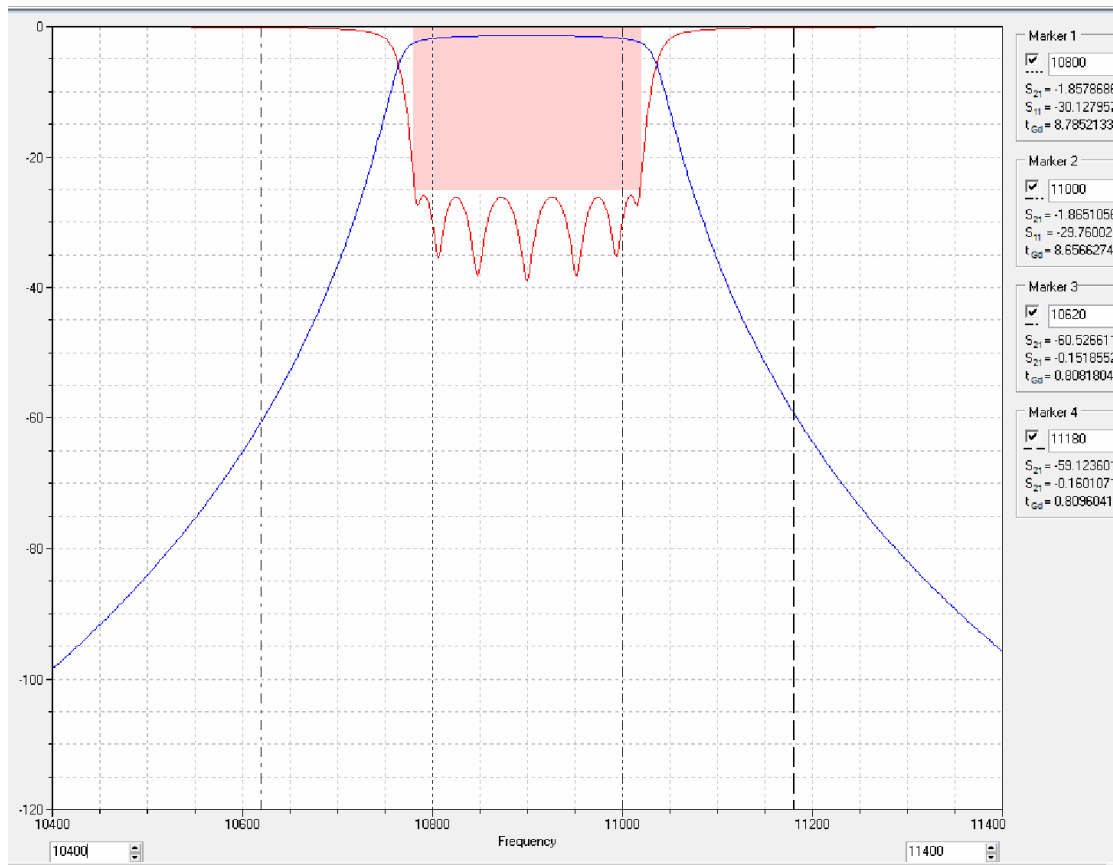

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.