

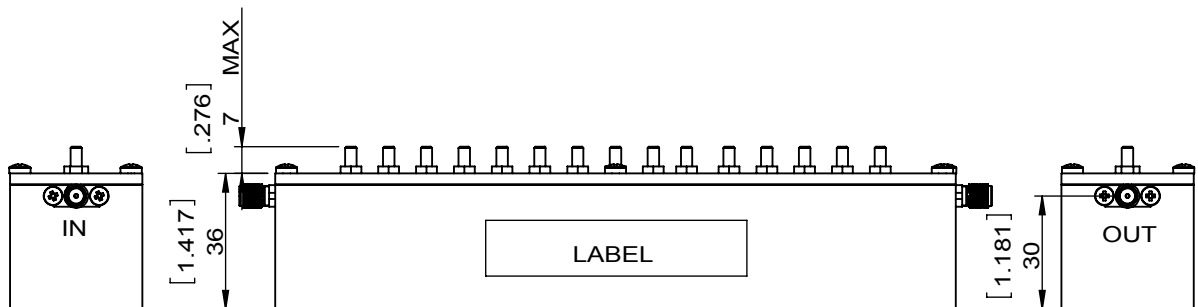


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		LJ.Zhang	12.08.2014	David					

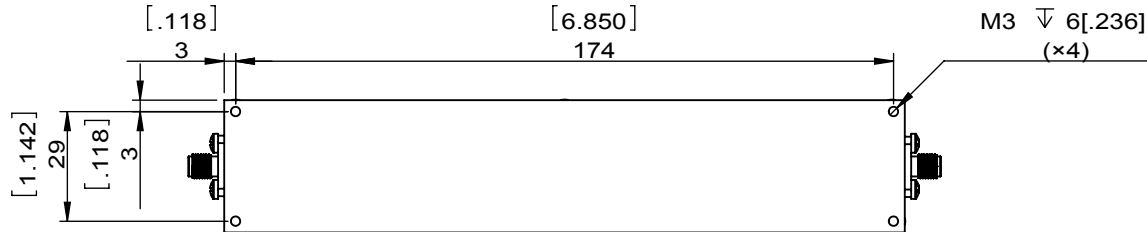

ITEM	SPECIFICATIONS
Frequency(MHz)	1765~2250
Insertion Loss(dB)	0.5 Max
Return Loss(dB)	14 Min
Specified Rejection(dB)	45 Min@1575.42 MHz
	45 Min@1320 MHz
	30 Min@2450 MHz
Connector	SMA-Female
Operating Temperature(°C)	-20~+55
Additional Notes	-

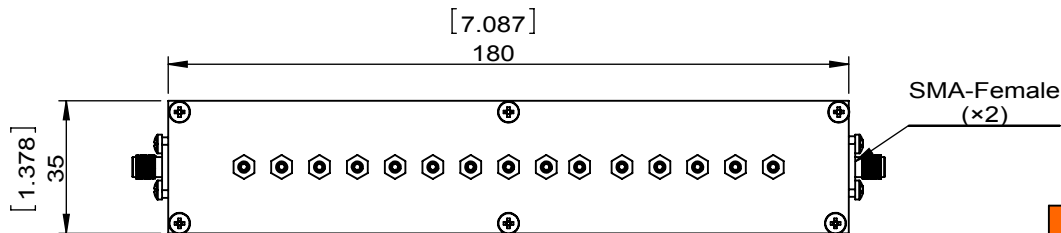


JQL JQL Electronic Inc

MATERIAL:	DWG NO: JFCB1765T2250SF			
SURFACE TREATMENT: PAINTED BLACK	DWG BY:	LJ.Zhang	12.08.2014	SCALE
	CHK'D BY:			1:2
DESCRIPTION: FILTER	APPV'D BY:			
	Unit:	Tolerance:		
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV. A/0								LJ.Zhang		DATE 12.08.2014	
								APPROVED		David	

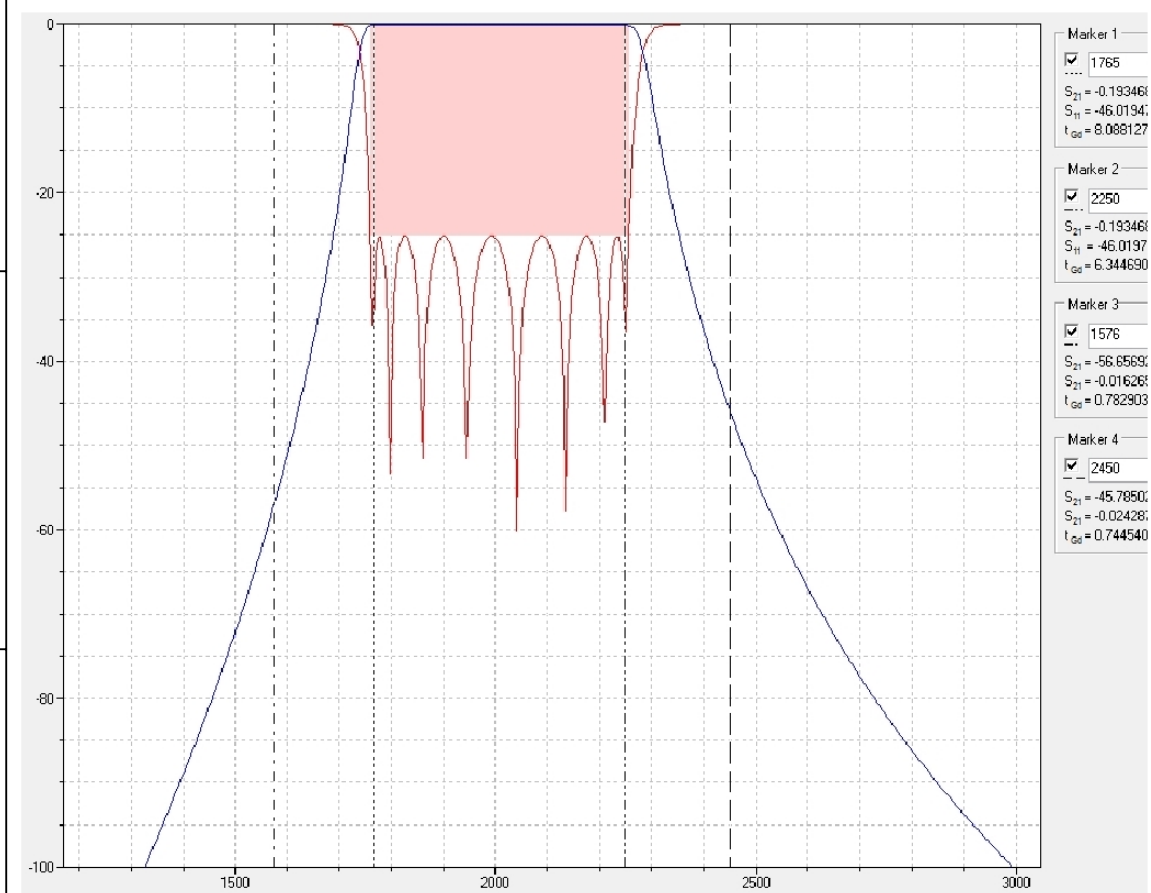

ITEM	SPECIFICATIONS	Maker Proposal Specification
Frequency(MHz)	1765~2250	ok
Insertion Loss(dB)	0.5 Max	ok
Return Loss(dB)	14 Min	ok
Specified Rejection(dB)	45 Min@1575.42 MHz	ok
	45 Min@1320 MHz	ok
	30 Min@2450 MHz	ok
Operating Temperature(°C)	-20~+55	ok
Additional Notes		ok

JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB1765T2250SF		
SURFACE TREATMENT: PAINTED BLACK		DWG BY:	LJ.Zhang	12.08.2014
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:2
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.