


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ywzhang	25.06.2014	David					

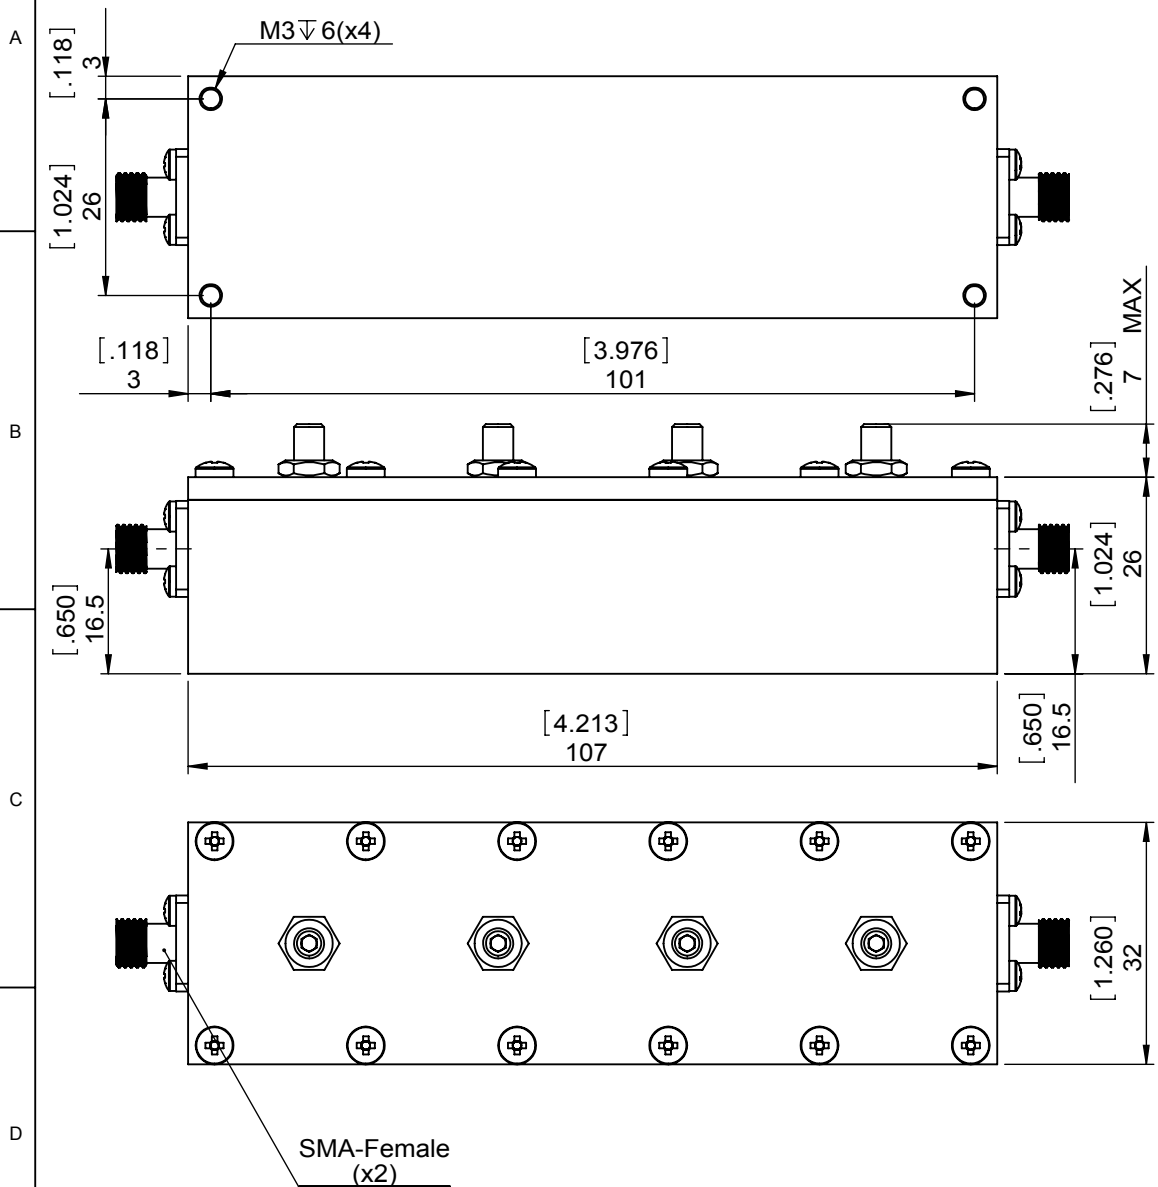

ITEM	SPECIFICATIONS
Passband (MHz)	2200-2250
Insertion Loss(dB)	1.5 max
Ripple(dB)	1 max
Return loss(dB)	18 min
Rejection(dB)	80 min@1565MHz
Power (W)	20
Temperature(°C)	-30 to +60
Connector	SMA-Female
Notes	

JQL JQL Electronic Inc 3501 Algonquin Road, Ste 230 1(888) 236-9828
 Rolling Meadows, IL 60008 (630) 823-2902

MATERIAL:	DWG NO: JFCB2200T2250SF			
SURFACE TREATMENT: PAINTED BLACK	DWG BY:	ywzhang	25.06.2014	SACLE
	CHK'D BY:			
DESCRIPTION: FILTER	APPV'D BY:			1:1
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		

RoHS COMPLIANCE
 This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.