
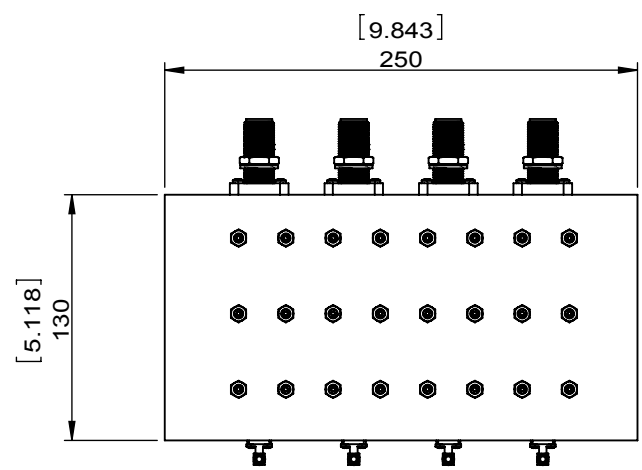


1		2		3		4		5		6	
Document No.	QR4-700-T-003			REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
REV.	A/0	[9.449]		0		LJ.Zhang	06.30.2014	David			

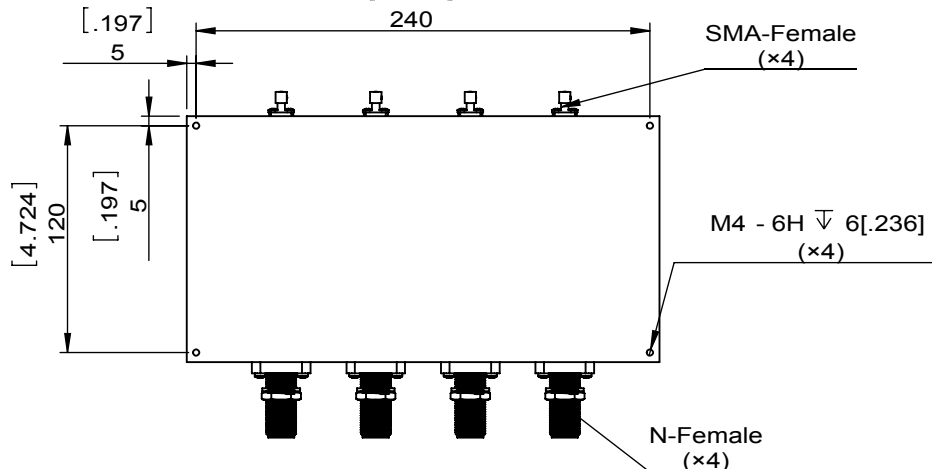

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

ITEM	SPECIFICATION
Frequency Rang(MHz)	2595~2645
Center Frequency(MHz)	2620
Insertion Loss(dB)	1.7 Max.@2595~2605 MHz 1.0 Max.@2605~2645 MHz
Return Loss(dB)	21 Typ 17.7 Min.
Pass Band Ripple(dB)	1.0 p-p Max@2595~2605MHz 1.0 p-p Max@2605~2645MHz
Rejection(dB)	45 Min.@DC~700MHz
	80 Min.@700~2490 MHz
	55 Min.@2490~2575 MHz
	15 Min.@2575~2590 MHz 20 Typ@2575~2590 MHz
	20 Min.@2665~2695 MHz
	60 Min.@2695~5350 MHz
Input Power (dBm)	+40 Avg
	85 Max.
Absolute Delay(ns)	60 Max.
Group Delay Variation(ns)	0~+85
Operating Temperature(°C)	-30~+85
Storage Temperature(°C)	5~95%
Humidity	N-Female; SMA-Female
RF Connectors	
Additional Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB2595T2645NF-A		
SURFACE TREATMENT: BLACK PAINTED		DWG BY:	LJ.Zhang	06.30.2014
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APP'V'D BY:		1:4
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:		A4