

1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	ZQ.Hou	DATE	06.24.2015	APPROVED	David

A

B

C






D

A

B

C

D

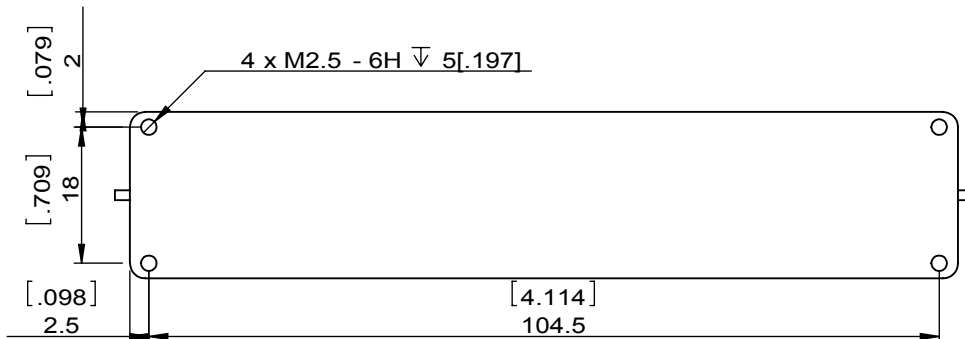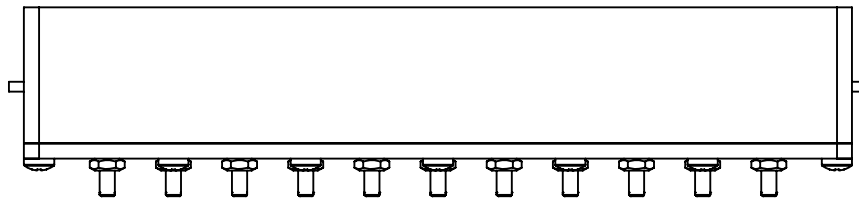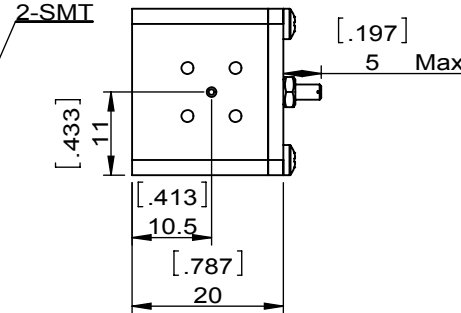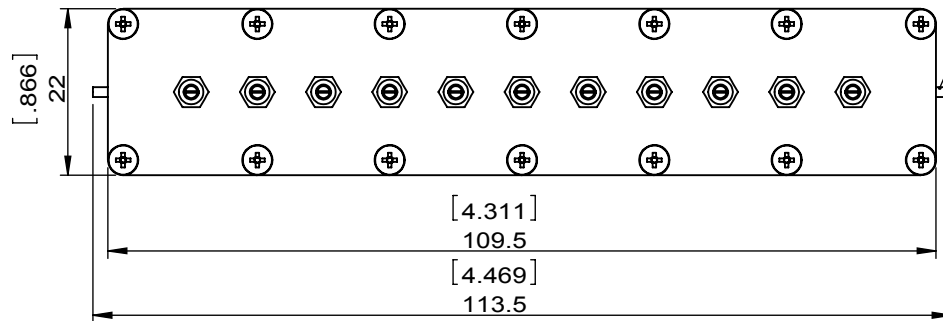

ITEM	SPECIFICATIONS
Frequency(GHz)	4.4~4.6
BW(MHz)	200 @ 1.0dB
Insertion Loss(dB)	3 Max
Ripple(dB)	1 ptp Max
Reject(dBc)	-30 @ > 4.8GHz -30 @ < 4.1GHz
Return Loss(dB)	15.6Min
Impedance(Ω)	50
Input Power(dBm)	+33 in band
Group Delay var in BW(ns)	1Max over 20MHz range
Temperature(°C)	-20~+55
Connector	SMT(4 screw)
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB4400T4600SMT		
SURFACE TREATMENT: Ag plating		DWG BY:	ZQ.Hou	06.24.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1

2


3

WEIGHT:

5

SHEET 1 OF 2

1		2		3		4		5		6		
Document No. QR4-700-T-003								REV.	DESCRIPTION	REVISOR	DATE	APPROVED
REV. A/0								0		ZQ.Hou	06.24.2015	David

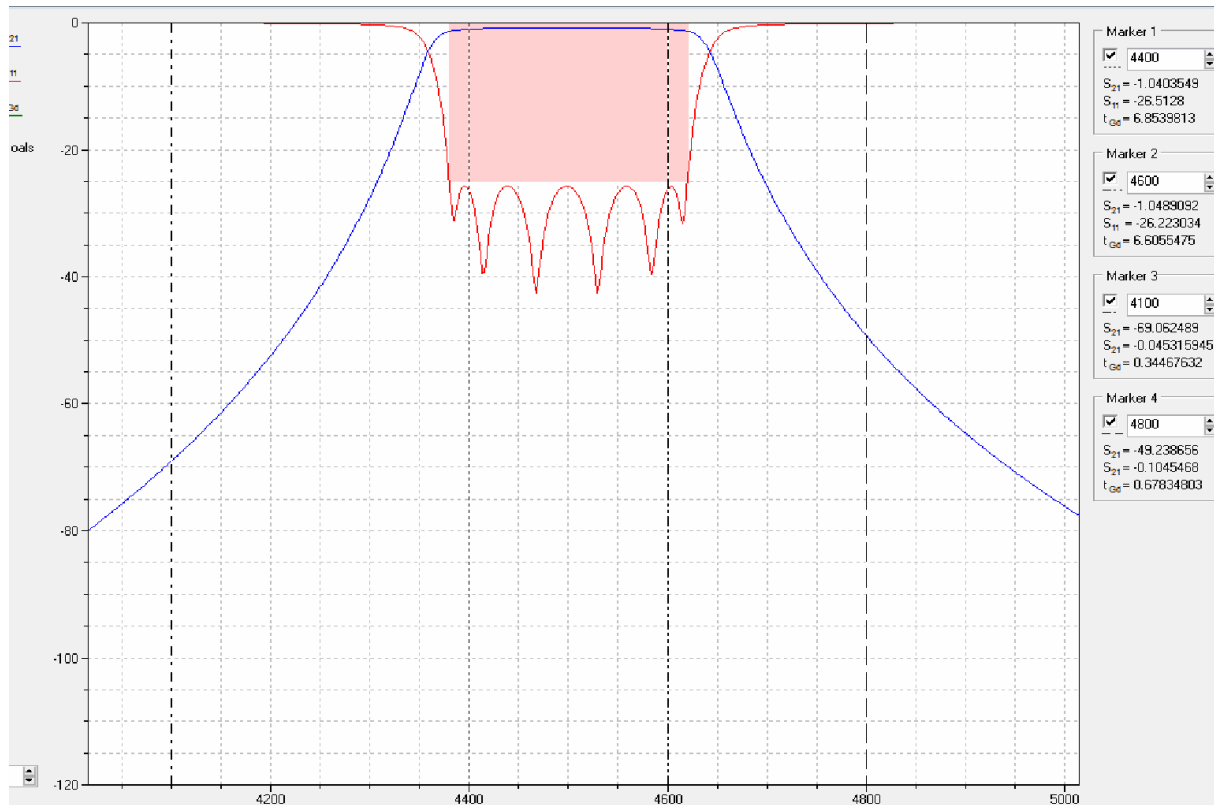

ITEM	SPECIFICATIONS
Frequency(GHz)	4.4~4.6
BW(MHz)	200 @ 1.0dB
Insertion Loss(dB)	3 Max
Ripple(dB)	1 ptp Max
Reject(dBc)	-30 @ > 4.8GHz -30 @ < 4.1GHz
Return Loss(dB)	15.6Min
Impedance(Ω)	50
Input Power(dBm)	+33 in band
Group Delay var in BW(ns)	1Max over 20MHz range
Temperature(°C)	-20~+55
Connector	SMT(4 screw)
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB4400T4600SMT		
SURFACE TREATMENT: Ag plating		DWG BY:	ZQ.Hou	06.24.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.