
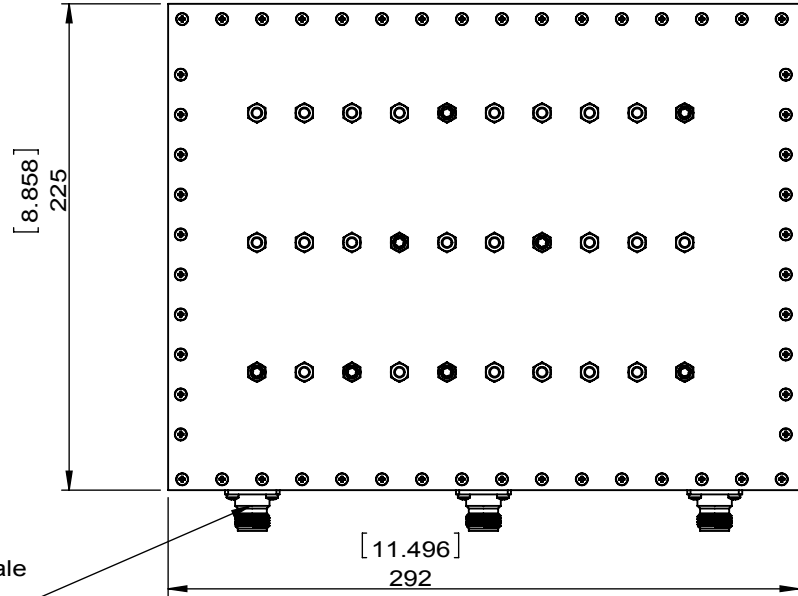


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LJ.Zhang	DATE	08.14.2014	APPROVED	David

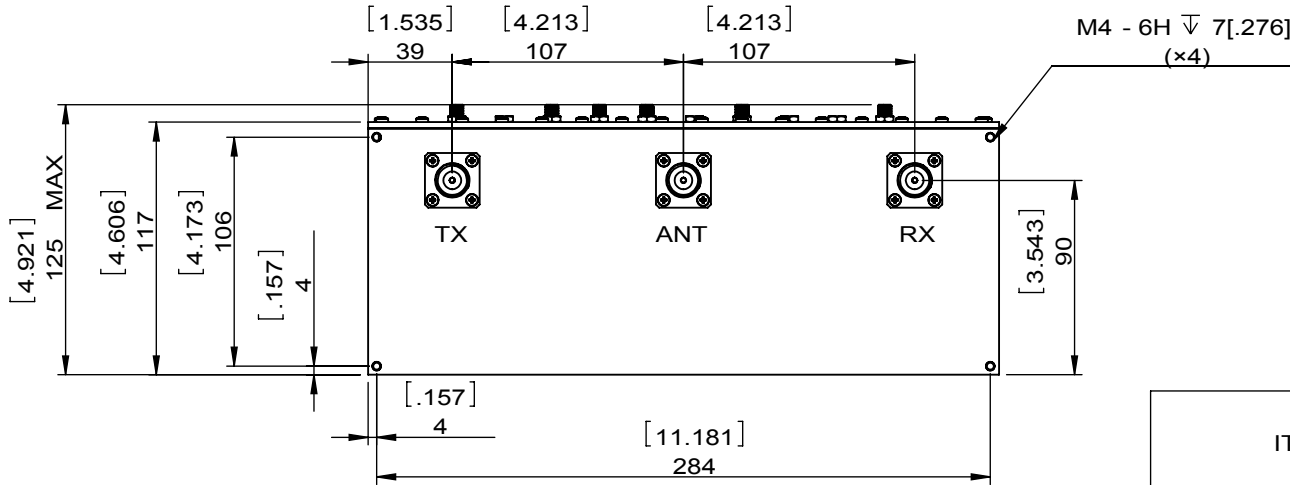

ITEM	SPECIFICATIONS	
	RX	TX
Frequency(MHz)	276.5~277.56	286.5~287.5
Insertion Loss(dB)	1.5 Max	1.5 Max
Return Loss(dB)	20 Min	20 Min
Rejection(MHz)	100 Min@282~282.6MHz 100 Min@289~289.6MHz	100 Min@282~282.6MHz 10 Min@289~289.6MHz
Power(W)	200 Max(CW)	
Operating TEMP(°C)	-40~+85	
Connector	N-Female	
Notes		

JQL JQL Electronic Inc

MATERIAL:	DWG NO: JFCD0276T0288NF		
SURFACE TREATMENT: PAINTED BLACK	DWG BY:	LJ.Zhang	08.14.2014
	CHK'D BY:		
DESCRIPTION: DUPLEXER	APPV'D BY:		1:3.5
	Unit:	Tolerance:	The First:
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°	

RoHS COMPLIANCE

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.