

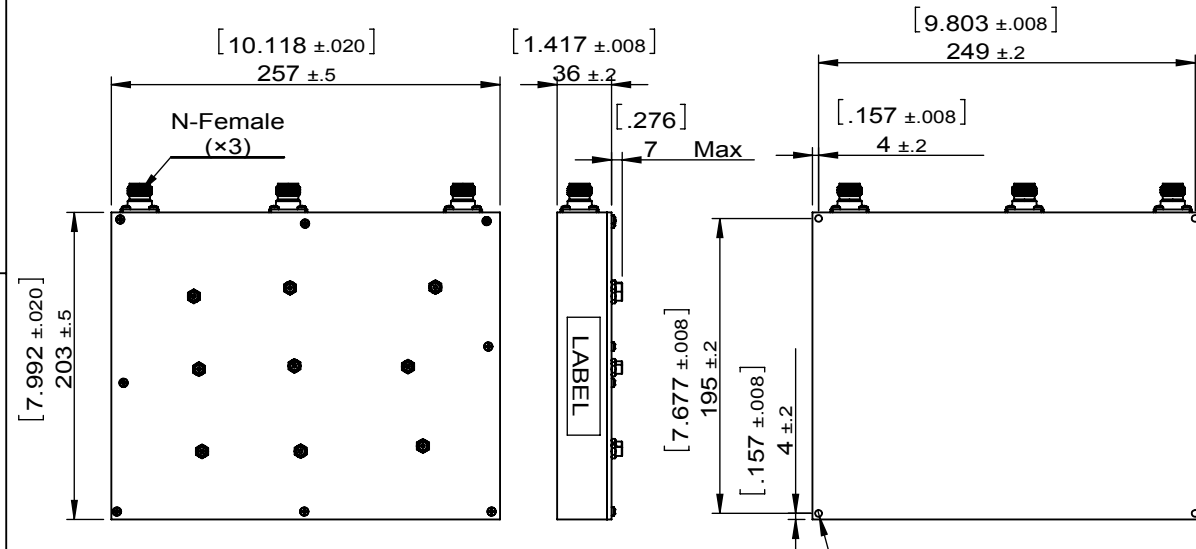


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LJ.Zhang	DATE	12.08.2014	APPROVED	David

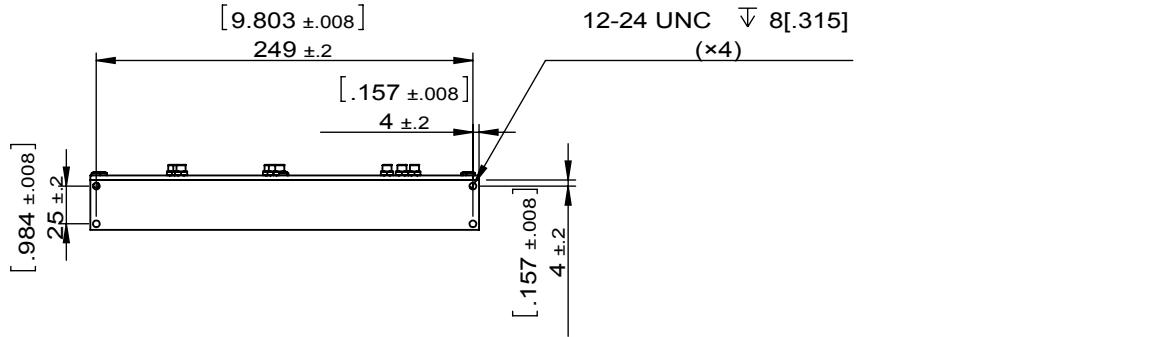

SPECIFICATIONS		
ITEM	RX	TX
Frequency(MHz)	762~776 851~869	792~824
Insertion Loss(dB)	1.5 Max	
Ripple in band(dB)	0.80 Max	
Rejection(dB)	70 Min Between T/R	
Return Loss(dB)	18.0 Min	
Impedance(Ω)	50	
Power Rating(W)	50	
Connector	N-Female	
Temperature Range(°C)	-20~+70	
Additional Notes	-	



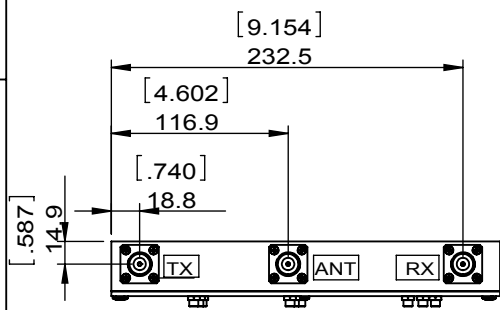


JQL JQL Electronic Inc

MATERIAL:	DWG NO: JFCD0762T0776N		
SURFACE TREATMENT: PAINED BLACK	DWG BY: LJ.Zhang	12.08.2014	SCALE
DESCRIPTION: DUPLEXER	CHK'D BY:		1:5
	APPV'D BY:		A4
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:

RoHS COMPLIANCE This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		APPROVED	
REV. A/0								0		David	
								LJ.Zhang		12.08.2014	

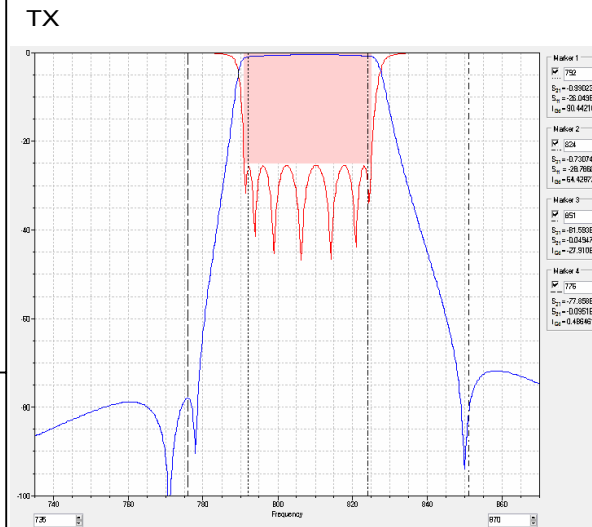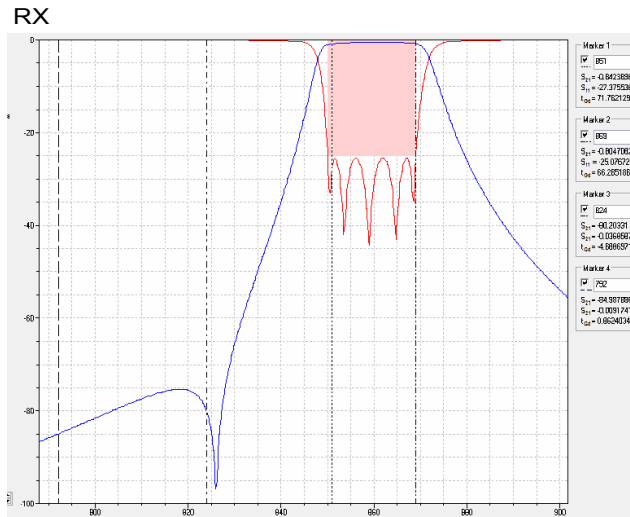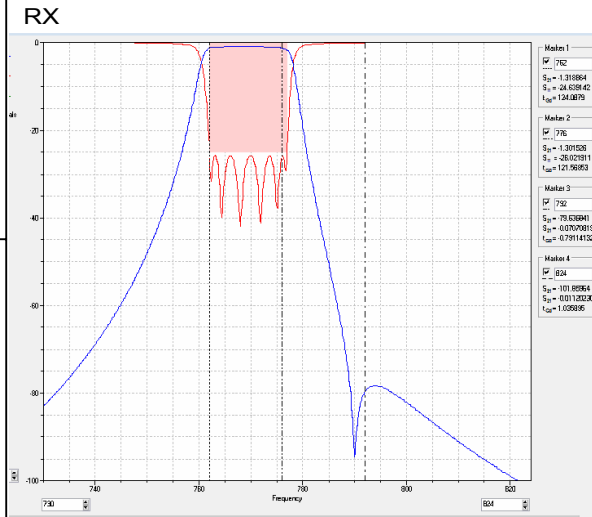

SPECIFICATIONS			
ITEM	RX	TX	Maker Proposal Specification
Frequency(MHz)	762~776 851~869	792~824	OK
Insertion Loss(dB)	1.5 Max		OK
Ripple in band(dB)	0.80 Max		OK
Rejection(dB)	70 Min Between T/R		OK
Return Loss(dB)	18.0 Min		OK
Impedance(Ω)	50		OK
Power Rating(W)	50		OK
Connector	N-Female		OK
Temperature Range(°C)	-20~+70		OK
Additional Notes	-		

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCD0762T0776N		
SURFACE TREATMENT: PAINED BLACK		DWG BY:	LJ.Zhang	12.08.2014
DESCRIPTION: DUPLXER		CHK'D BY:		SCALE
		APPV'D BY:		1:5
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.