


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LJ.Zhang	DATE	12.08.2014	APPROVED	David






SPECIFICATIONS		
ITEM	RX	TX
Frequency(MHz)	762~776 851~869	792~824
Insertion Loss(dB)	1.5 Max	
Ripple in band(dB)	0.80 Max	
Rejection(dB)	70 Min Between T/R	
Return Loss(dB)	18.0 Min	
Impedance(Ω)	50	
Power Rating(W)	50	
Connector	N-Female	
Temperature Range(°C)	-20~+70	
Additional Notes	-	

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> 8-25054		
<b>SURFACE TREATMENT:</b> PAINED BLACK		DWG BY:	LJ.Zhang	12.08.2014
<b>DESCRIPTION:</b> DUPLEXER		CHK'D BY:		SCALE
		APPV'D BY:		1:5
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	
				A4

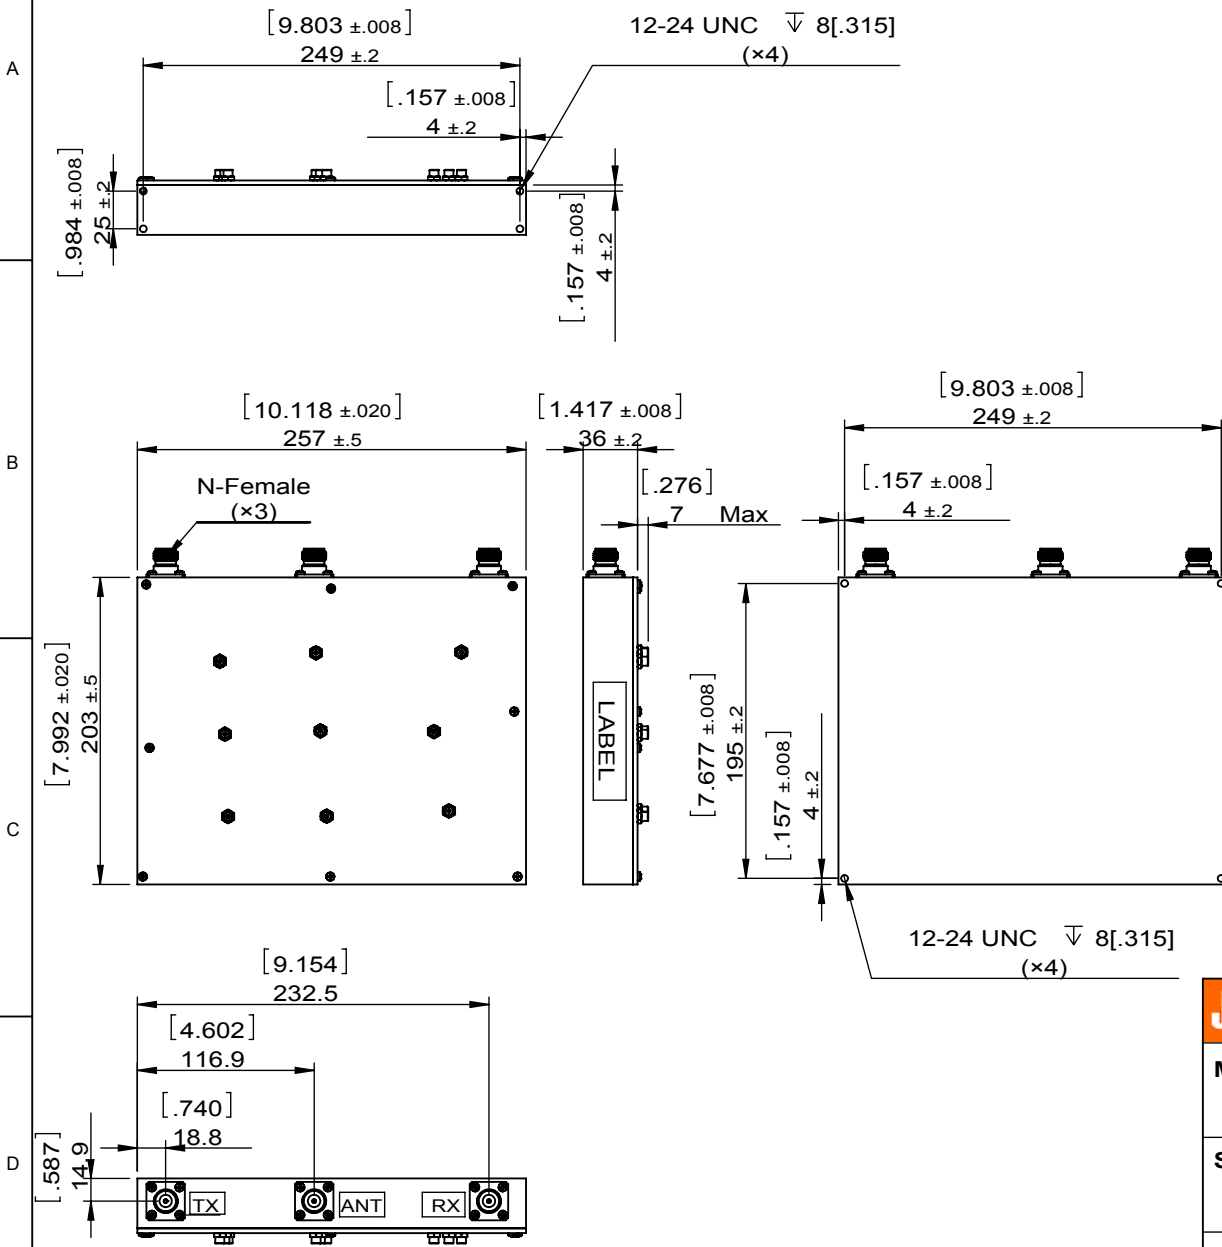

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV. A/0								LJ.Zhang		DATE 12.08.2014	
								APPROVED		David	

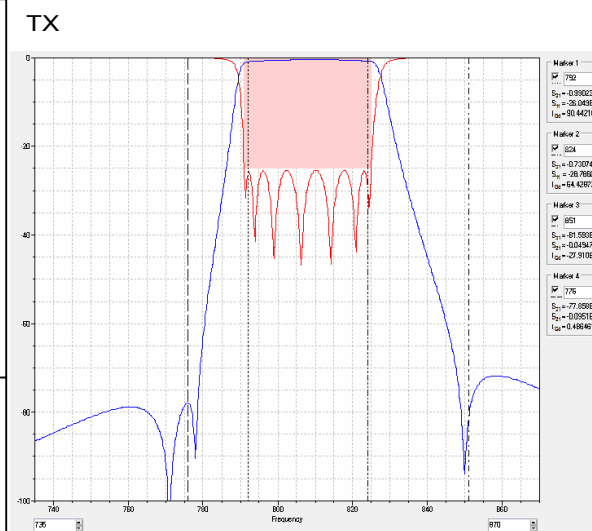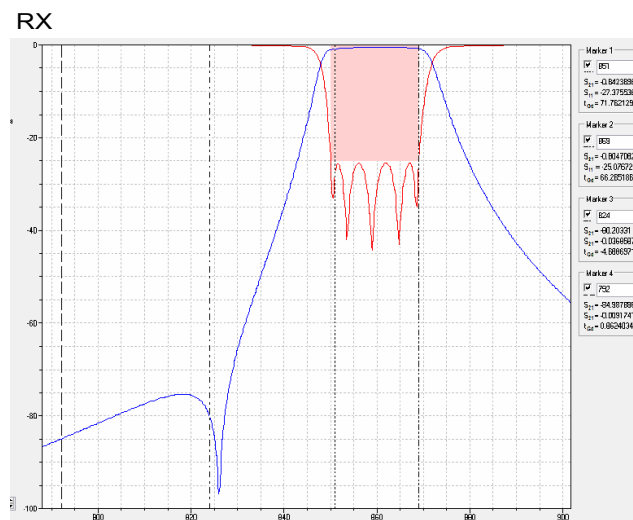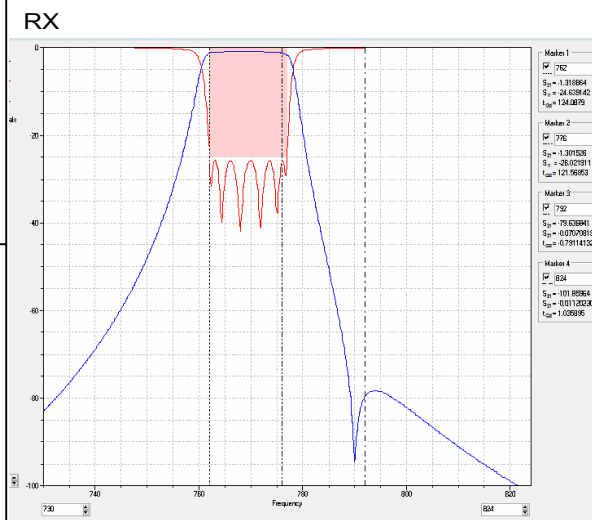

SPECIFICATIONS			
ITEM	RX	TX	Maker Proposal Specification
Frequency(MHz)	762~776 851~869	792~824	OK
Insertion Loss(dB)	1.5 Max		OK
Ripple in band(dB)	0.80 Max		OK
Rejection(dB)	70 Min Between T/R		OK
Return Loss(dB)	18.0 Min		OK
Impedance(Ω)	50		OK
Power Rating(W)	50		OK
Connector	N-Female		OK
Temperature Range(°C)	-20~+70		OK
Additional Notes	-		

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> 8-25054		
<b>SURFACE TREATMENT:</b> PAINED BLACK		DWG BY: LJ.Zhang	12.08.2014	SCALE
<b>DESCRIPTION:</b> DUPLEXER		CHK'D BY:		1:5
Unit: mm[inch]		APPV'D BY:		A4
Tolerance: Liner: ±0.25 Anguar: ±0.5°		The First:		



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.