
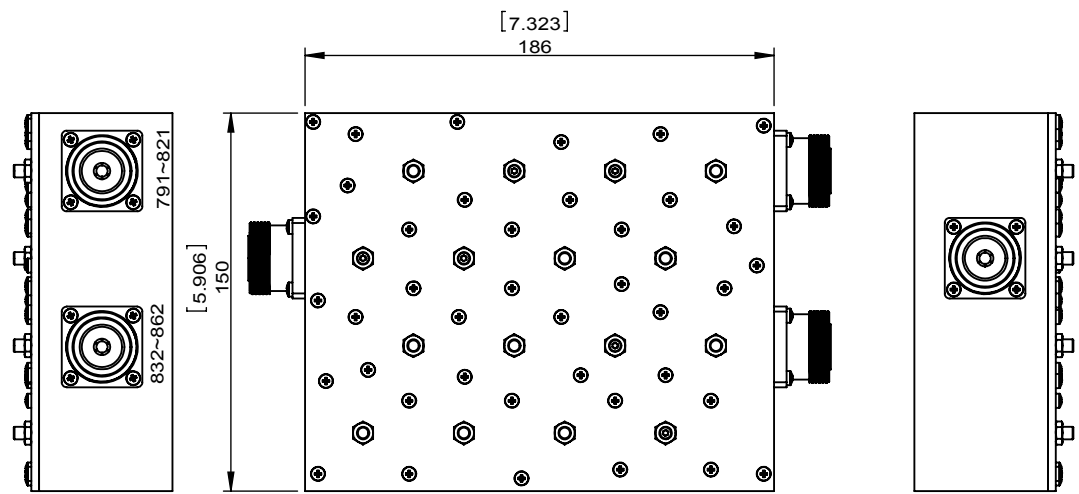
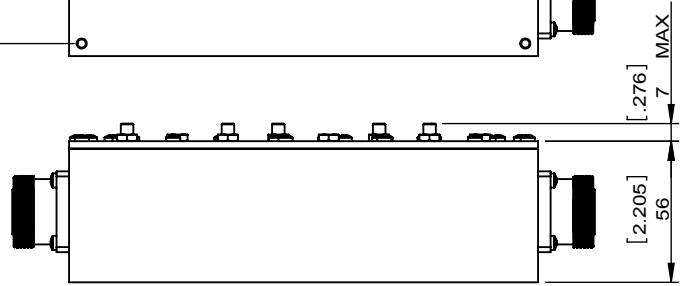


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LJ.Zhang	DATE	08.29.2014	APPROVED	David

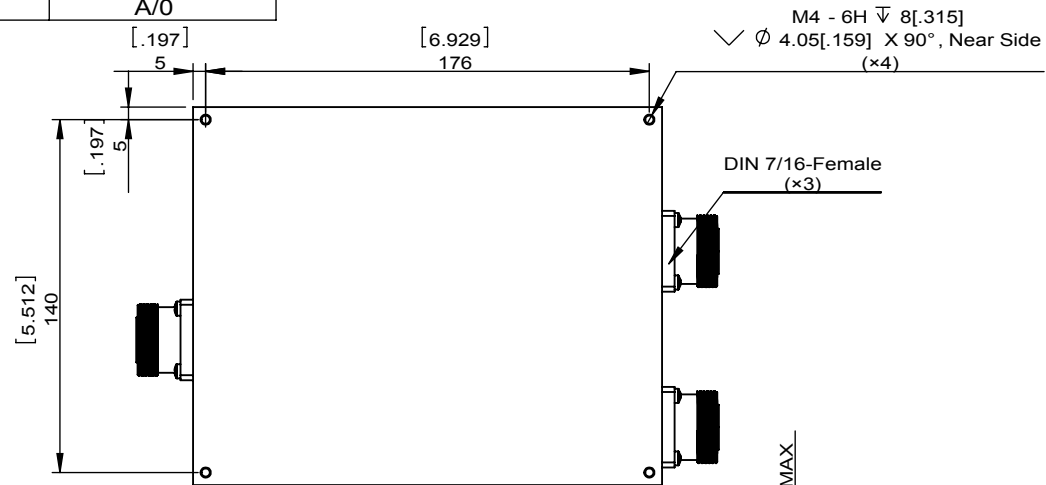

ITEM	SPECIFICATIONS	
	LOW	HIGH
Frequency(MHz)	791~821	832~862
Insertion Loss(dB)	1.0 Max	
Isolator(dB)	80 Min	
PIM(dBc)	160 Min @2*43dBm	
Connector	DIN 7/16-Female	
Power(W)	50	
Notes		

JQL JQL Electronic Inc

MATERIAL: _____ **DWG NO:** JFCD0791T0862DF

SURFACE TREATMENT: CHEM FILM

DWG BY:	LJ.Zhang	08.29.2014	SCALE
CHK'D BY:			
APPV'D BY:			1:3
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

RoHS COMPLIANCE

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.