

1	2	3	4	5	6		
Document No.	QR4-700-T-003	REV.		DESCRIPTION	REVISOR	DATE	APPROVED
REV.	A/0	0			LJ.Zhang	08.28.2014	David

A

A

B


B

C

C

D

D

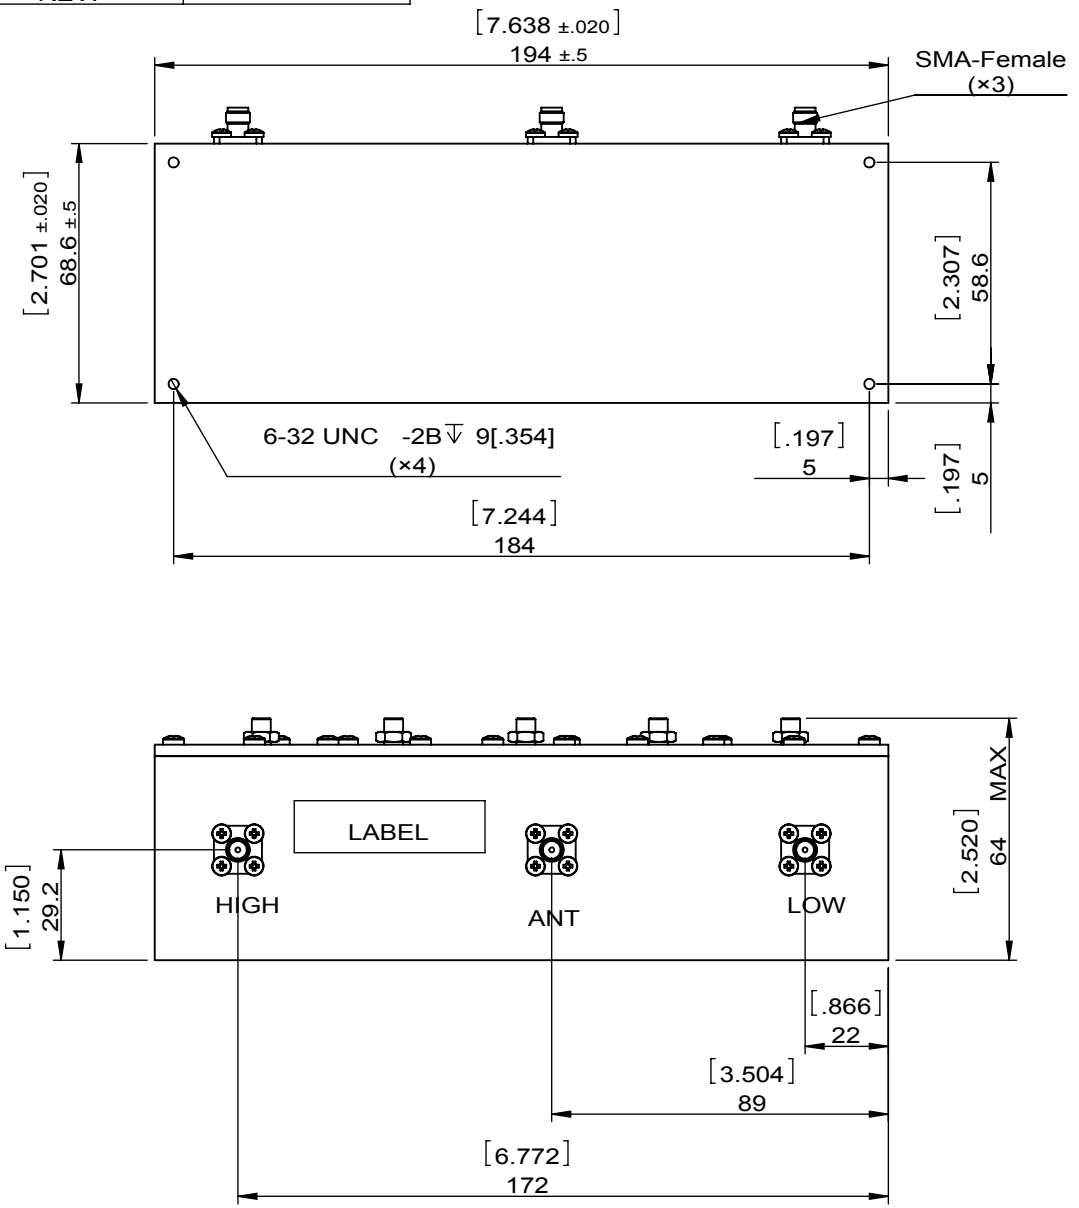

ITEM	SPECIFICATIONS	
Frequency(MHz)	Low	Highband
	806~816	851~861
Insertion Loss(dB)	1.5 Max	
Return Loss(dB)	18 Min	
Rejection(dB)	95 Min@851~861 MHz	95 Min@806~816 MHz
Isolation(dB)	95 Min	
Power(W)	10	
Temperature(°C)	-20~+80	
Connector	SMA-Female	
Notes		

JQL JQL Electronic Inc

MATERIAL:	DWG NO: JFCD0806T0861S			
SURFACE TREATMENT: PAINTED BLACK	DWG BY:	LJ.Zhang	08.28.2014	SCALE
	CHK'D BY:			
DESCRIPTION: DUPLEXER	APPV'D BY:			1:2
	Unit: mm[inch]	Tolerance: Liner: ± 0.25 Anguar: $\pm 0.5^\circ$	The First:	A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.