



1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV. A/0								0		LJ.Zhang	
								08.29.2014		DATE	
								David		APPROVED	

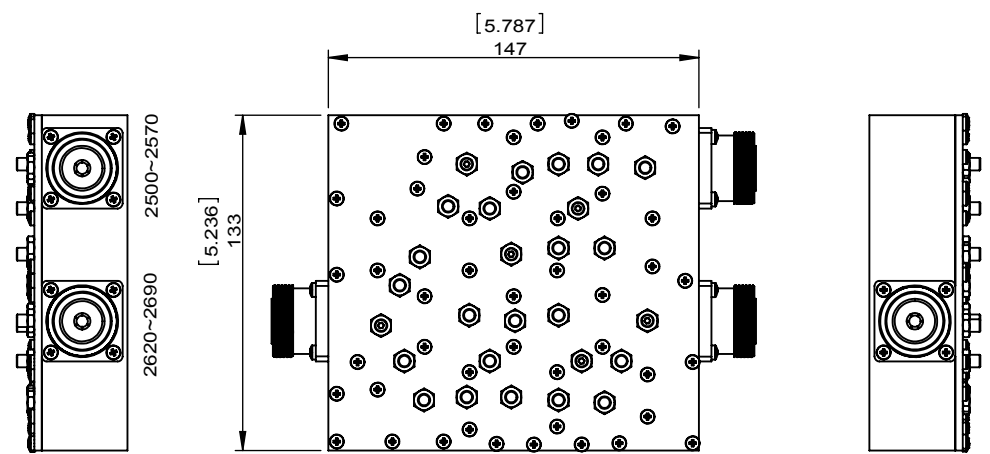

ITEM	SPECIFICATIONS	
	LOW	HIGH
Frequency(MHz)	2500~2570	2620~2690
Insertion Loss(dB)	1.0 Max	
Isolator(dB)	80 Min	
PIM(dBc)	160 Min @2*43dBm	
Connector	DIN 7/16-Female	
Power(W)	50	
Notes		

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCD2500T2690DF		
SURFACE TREATMENT: CHEM FILM		DWG BY:	LJ.Zhang	08.29.2014
DESCRIPTION: DUPLEXER		CHK'D BY:		SCALE
		APPV'D BY:		1:3
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

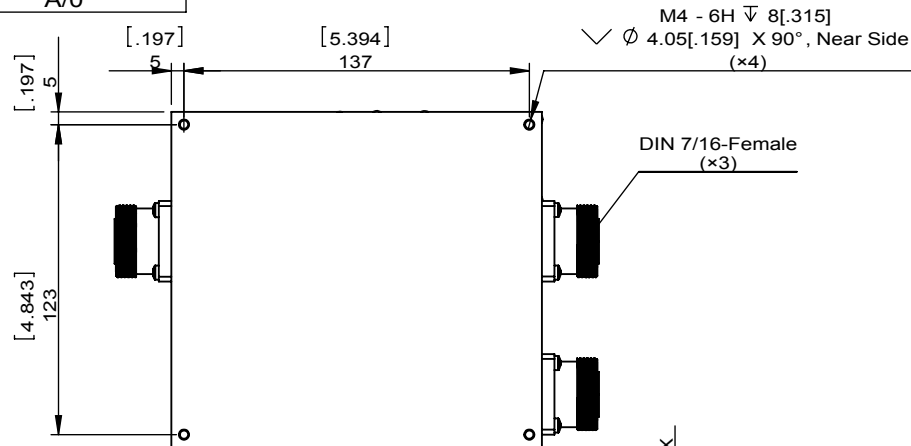

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

A
B
C
D

A
B
C
D