

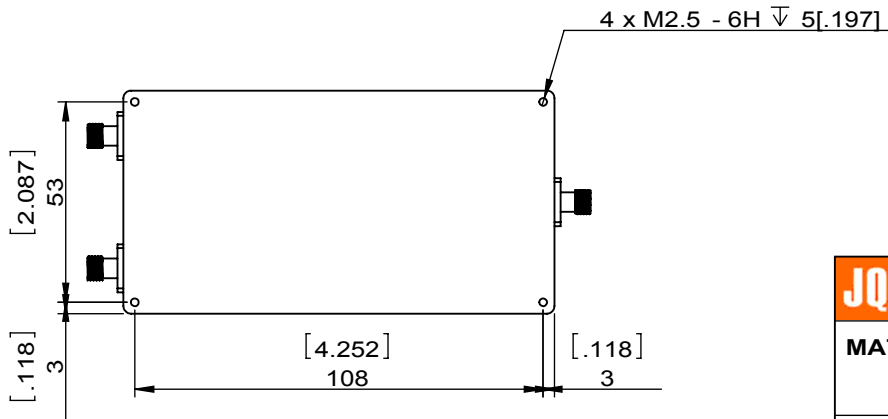


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
REV.	A/0	0		ZQ.Hou	06.23.2015	David					





ITEM	SPECIFICATIONS	
	CH1	CH2
Frequency range(GHz)	4.4~5.0	5.2~5.85
Insertion Loss(dB)	1.0 Max	
Isolation(dB)	60	
Return Loss(dB)	16Min	
Impedance(Ω)	50	
Power(W)	60 Min CW @ 2.5:1 Load	
Temperature(°C)	-40~+85	
Connector	SMA FEMALE	
Notes		

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> JFCD4400T5850SF		
<b>SURFACE TREATMENT:</b> PAINTED BLACK		DWG BY:	ZQ.Hou	06.23.2015
<b>DESCRIPTION:</b> Diplexer		CHK'D BY:		SCALE
		APPV'D BY:		1:2
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4	

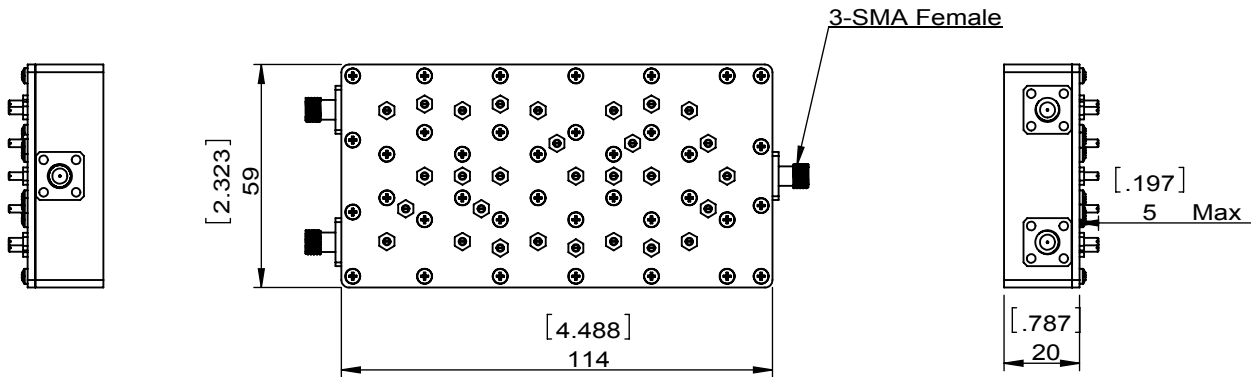

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No. QR4-700-T-003						REV. 0		DESCRIPTION		REVISOR ZQ.Hou	
REV. A/0										DATE 06.23.2015	
										APPROVED David	

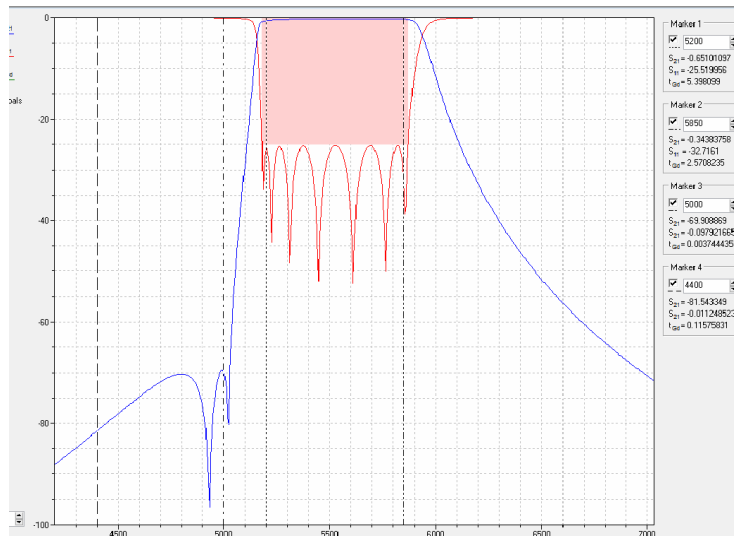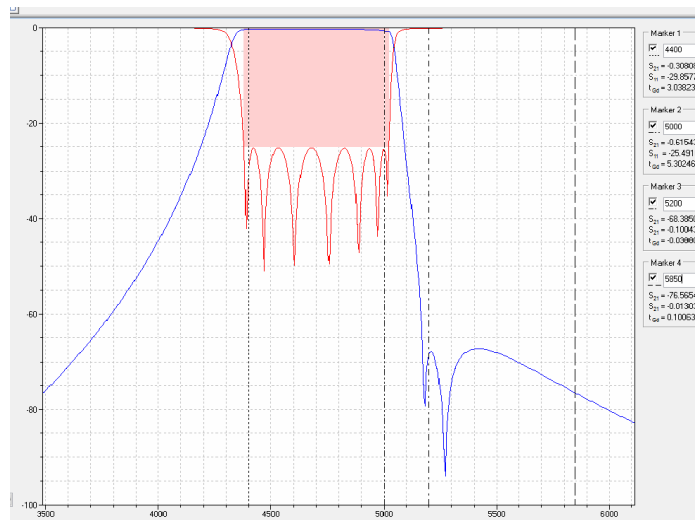

ITEM	SPECIFICATIONS	
	CH1	CH2
Frequency range(GHz)	4.4~5.0	5.2~5.85
Insertion Loss(dB)	1.0 Max	
Isolation(dB)	60	
Return Loss(dB)	16Min	
Impedance( $\Omega$ )	50	
Power(W)	60 Min CW @ 2.5:1 Load	
Temperature( $^{\circ}$ C)	-40~+85	
Connector	SMA FEMALE	
Notes		

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> JFCD4400T5850SF		
<b>SURFACE TREATMENT:</b> PAINTED BLACK		DWG BY:	ZQ.Hou	06.23.2015
<b>DESCRIPTION:</b> Diplexer		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: $\pm 0.25$ Anguar: $\pm 0.5^{\circ}$	The First: 
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.