


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		LJ.Zhang	05.08.2014	David					

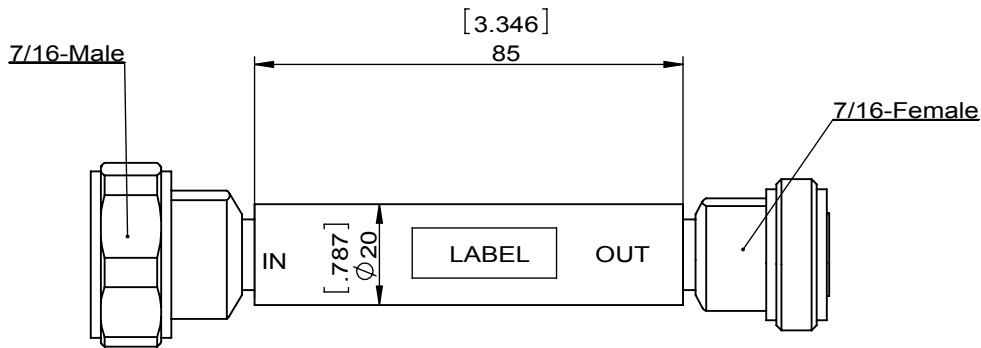

SPECIFICATIONS	
Frequency(MHz)	698~2700
Insertion Loss(dB)	0.08 Max
Retrun Loss(dB)	19 Min
Intermod.Distortion(dBc)	-153 Max (2 tones of +43 dBm)
Power Rating(W)	500 AVG;10000 PK Breakdown Voltage:3000 Max. DC
Impedance(Ω)	50
Operating Temperature(°C)	-35~+75
IP Rating	IP65
Connector(Input-Output)	7/16 DIN Male - 7/16 DIN Female
Notes	-

**JQL** JQL Electronic Inc

**MATERIAL:**

**DWG NO:**

JFCDB0700T2700D

**SURFACE TREATMENT:**

Passivated aluminum

DWG BY:	LJ.Zhang	05.08.2014	SCALE
---------	----------	------------	-------

CHK'D BY:			
-----------	--	--	--

**DESCRIPTION:**

DC BLOCK

APPV'D BY:			1:1.5
------------	--	--	-------

Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 	A4
-------------------	---	----------------	----



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.