

1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LJ.Zhang	DATE	07.30.2014	APPROVED	David

A

A

B


B

C

C

D

D

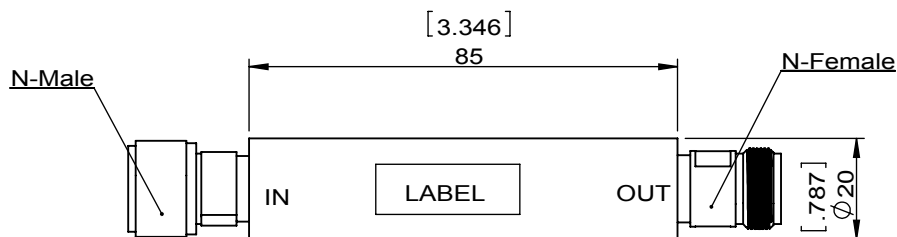

SPECIFICATIONS

Frequency(MHz)	698~2700
Insertion Loss(dB)	0.08 Max
Retrun Loss(dB)	19 Min
Intermod.Distortion(dBc)	-153 Max (2 tones of +43 dBm)
Power Rating(W)	500 AVG;10000 PK Breakdown Voltage:3000 Max. DC
Impedance(Ω)	50
Operating Temperature($^{\circ}\text{C}$)	-35~+75
IP Rating	IP65
Connector(Input-Output)	N Male - N Female
Notes	-


JQL Electronic Inc
MATERIAL:**DWG NO:**

JFCDB0700T2700N

SURFACE TREATMENT:

Passivated aluminum

DWG BY:

LJ.Zhang

07.30.2014

SCALE

CHK'D BY:

APPV'D BY:

1:1.5

DESCRIPTION:

DC BLOCK

Unit:

mm[inch]

Tolerance:

Liner: ± 0.25 Anguar: $\pm 0.5^{\circ}$

The First:



A4



This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes
or communicated to third party as a whole or partly,
without the written consent of JQL Electronic Inc.

1

2

3

WEIGHT:

5

SHEET 1 OF 1