


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISER	DATE	APPROVED	
REV.	A/0					0		YL.Chen	07.29.2019	HC.Qiu	



ITEM	SPECIFICATIONS
Frequency(MHz)	380~3600
Insertion Loss(dB)	0.3 Max
Coupling Attenuation(dB)	30 ± 2
Return Loss(dB)	17.7Min
Average Power(W)	200
PIM(dBc)	-140 Max @ 2x43dBm
Impedance(Ω)	50
Operation Temperature(°C)	-35~+75
Storage Temperature(°C)	-40~+85
Relative Humidity	0~95%
Connector	N FEMALE
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO:		
		JFCDC0380T3600NF30		
SURFACE TREATMENT:		DWG BY:	YL.Chen	07.29.2019
PAINTED BLACK		CHK'D BY:		SCALE
DESCRIPTION:		APPV'D BY:		1:2
DIRECTIONAL COUPLER		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	
			Anguar: ±0.5°	A4

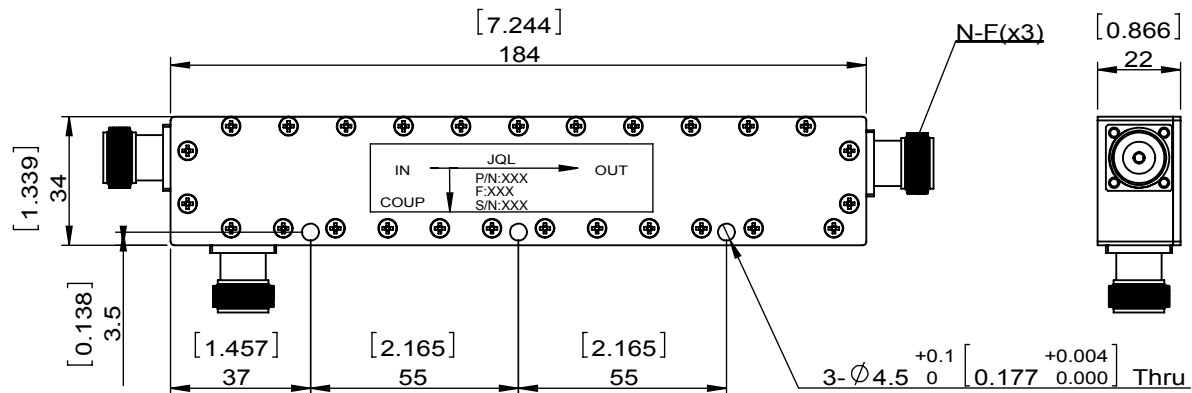

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.