



1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		M.Hao	02.17.2014	David	

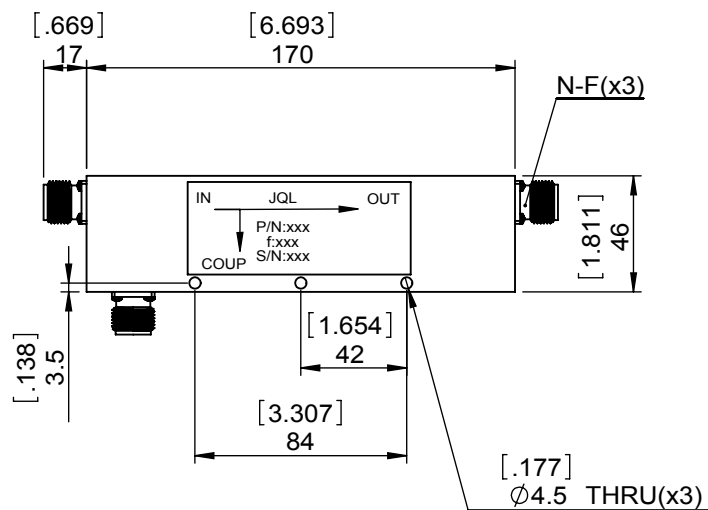

SPECIFICATIONS	
Part's Number	JFCDC0698T3600NF30
Frequency(MHz)	698~3600
Insertion Loss (dB)MAX	0.3
Coupling Attenuation(dB)	30±2
VSWR MAX.	1.3
Average Power (Watte)	200
PIM.(dBc)MAX	-140@2x43dBm
Impedance(Ω)	50
CONNECTOR	N-F
Operation Temperature (°C)	-35~+75
Storage Temperature(°C)	-40~+85
Relative Humidity	0~95%
Additional Notes	-

JQL JQL Electronic Inc		500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA		Tel: 1(888)236-9828 Fax: 1(888)823-2902	
MATERIAL:	-				
SURFACE TREATMENT:	PAINTED BLACK				
DESCRIPTION:	DIRECTIONAL COUPLER				
DWG NO:		JFCDC0698T3600NF30			
DWG BY:		M.Hao	02.17.2014	SACLE	
CHK'D BY:					
APPV'D BY:					
Unit:		Tolerance:		The First:	
mm[inch]		Liner: ±0.25 Anguar: ±0.5°		1:3	
				A4	

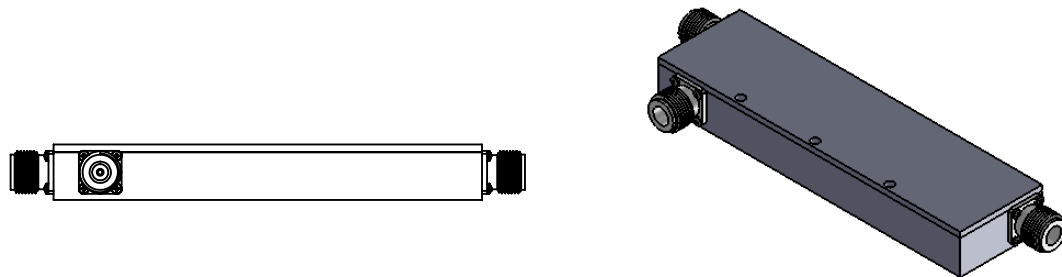

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.