



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		LJ.Zhang	05.16.2014	David					

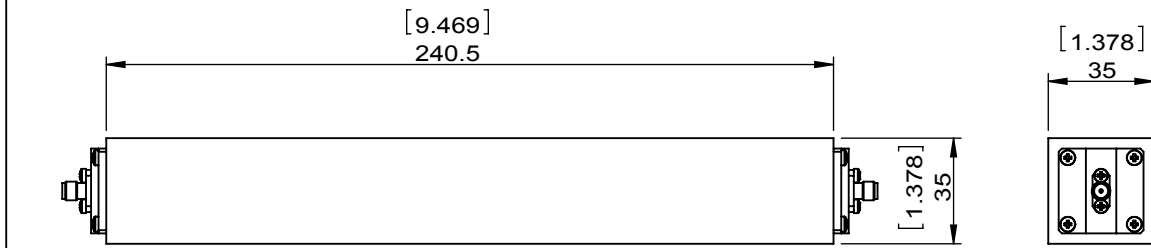

SPECIFICATIONS	
Part's Number	JFCL0010T0450SF
Frequency Range(MHz)	10~450
Bandwidth(MHz)	440
Insertion Loss(dB)	0.9 Max.
Ripple(dB)	0.5 p-p Max.
Return Loss(dB)	18 Min.
Attenuation(dB)	12 Min @ 620MHz 30 Min @ 700MHz ~ 1000MHz 35 Min @ 1050MHz~2000MHz
Maximum Operating Power (W)	120 (CW), 200(peak)
In/Out Impedance (Ohms)	50
RF Connector	SMA Female
Operating Temperature(°C)	-40~+85

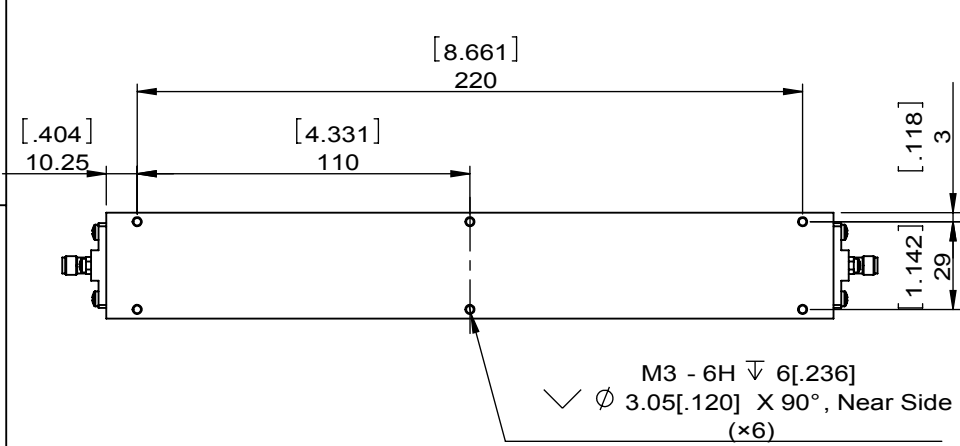

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCL0010T0450SF		
SURFACE TREATMENT: Black Painted		DWG BY:	LJ.Zhang	05.16.2014
DESCRIPTION: Low-Pass Filter		CHK'D BY:		SACLE
		APPV'D BY:		1:2.5
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4