



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	DESCRIPTION	REVISOR	DATE	APPROVED					
REV.	A/0	0		ywzhang	06.06.2014	David					

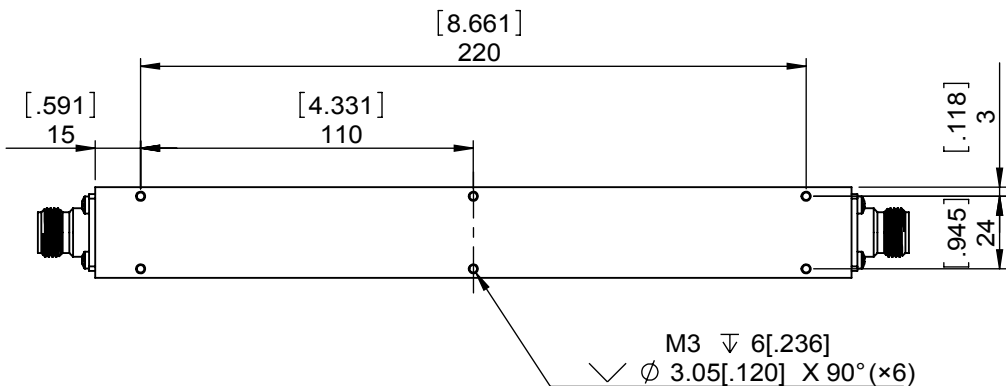

ITEM	SPECIFICATIONS
Frequency Range(MHz)	10~500
Insertion Loss(dB)	0.9 Max.
Ripple(dB)	0.5 Max.
Return Loss(dB)	18 Min.
Rejection(dB)	30 min @ 800MHz ~ 1000MHz
Power Handling(W)	120
In/Out Impedance (Ohms)	50
RF Connector	N-Female
Operating Temperature(°C)	-20~+85
Notes	SMA-Female optional

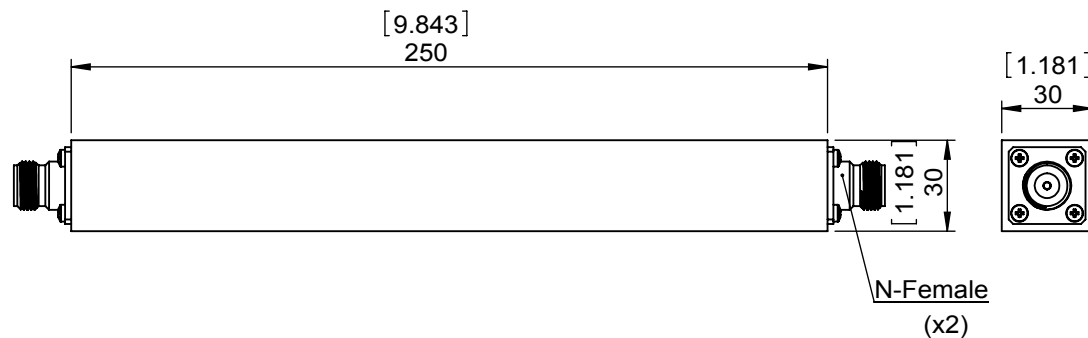

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCL0010T0500NF		
SURFACE TREATMENT: PAINTED BLACK		DWG BY:	ywzhang	06.06.2014
DESCRIPTION: Low-Pass Filter		CHK'D BY:		
		APPV'D BY:		
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:		1:2.5
				A4