

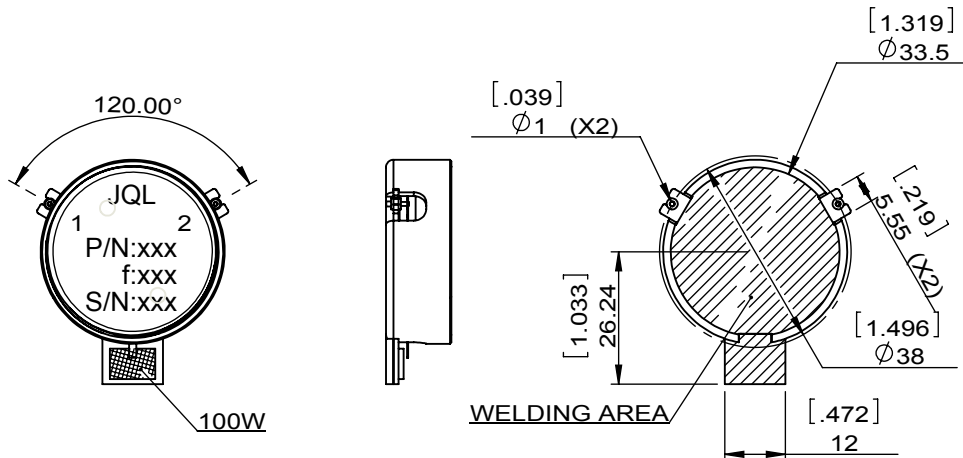


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				ZC.Wu	02.04.2015	David			



SPECIFICATIONS	
Part's Number	JIM0352T0363PE10
Frequency(GHz)	0.352~0.363
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	20/100/-
Operating Temperature(°C)	
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	100W
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	ACP : Less than -60dB based on input of 48.5dBm Modulation :π/4 shift QPSK,α=0.5,PN9,32ksps Measurement : Δf=25kHz,BW=16kHz-

NOTES:Ensure the welding area in the same plane and contact pin copanarity is±0.1[0.004]



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

<b>JQL Electronic Inc</b>				
<b>MATERIAL:</b> STEEL	<b>DWG NO:</b> JIM0352T0363PE10			
<b>SURFACE TREATMENT:</b> NICKLE PLATING	DWG BY:	ZC.Wu	02.04.2015	SCALE
<b>DESCRIPTION:</b> SMT ISOLATOR	CHK'D BY:			<b>2:3</b>
	APP'V'D BY:			
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 	