
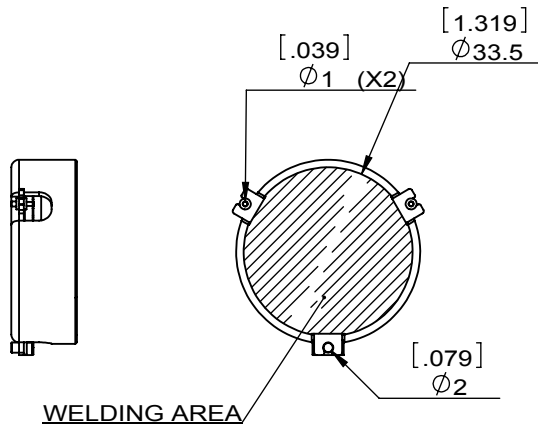




1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0				ZC.Wu	09.03.2014	David			



SPECIFICATIONS	
Part's Number	JIM0352T0363PE2
Frequency(GHz)	0.352~0.363
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	20/20/-
Operating Temperature(°C)	
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	30W
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	ACP : Less than -65dB based on input of 41.5dBm Modulation :π/4 shift QPSK,α=0.5,PN9,32ksps Measurement : Δf=25kHz,BW=16kHz-

### JQL Electronic Inc

**MATERIAL:**  
STEEL

**DWG NO:**  
JIM0352T0363PE2

**SURFACE TREATMENT:**  
NICKLE PLATING

DWG BY:	ZC.Wu	09.03.2014	SCALE
---------	-------	------------	-------

**DESCRIPTION:**  
SMT ISOLATOR

CHK'D BY:			2:3
APP'V'D BY:			
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.