


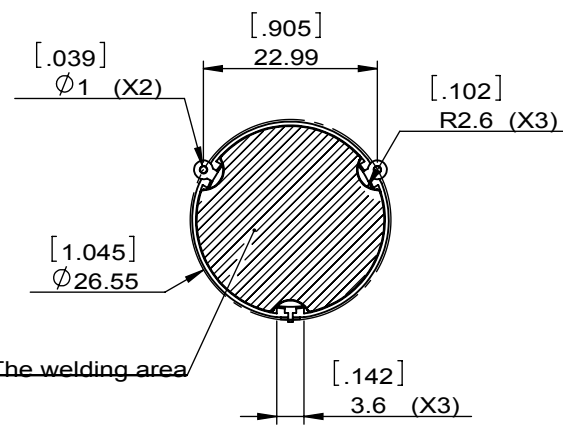
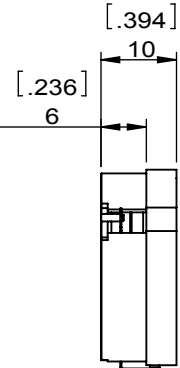




1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		ZC.Wu	06.23.2015	David			



SPECIFICATIONS	
Part's Number	JIM0699T0894PN0
Frequency(GHz)	0.699~0.894
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
3rd IMD(dBc)MAX	--
Power FWD/REV/PK(Watt)	-/-/60
Operating Temperature(°C)	-40~+100
Storage Temperature(°C)	-55~+150
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	15
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	CONTACT PIN COPLANARITY IS ±0.1[0.004]

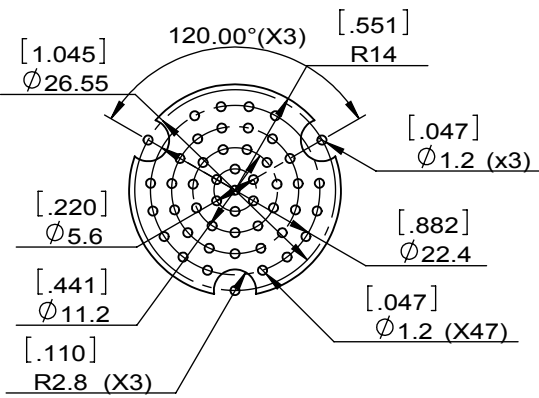

Copper Pattern

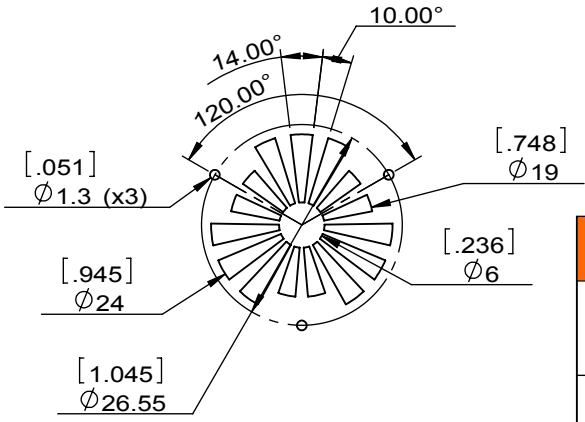

Soldermask Pattern

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JIM0699T0894PN0		
SURFACE TREATMENT: SILVER PLATING		DWG BY:	ZC.Wu	06.23.2015
DESCRIPTION: SMT ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.