

1.8~2.1GHz Surface Mount Isolator

JIM1800T2100PN10A3

Description:




JIM1800T2100PN10A3 is a surface mount isolator in the frequency 1.800~2.100GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.4dB and minimum return loss of 20dB. It can handle a CW Power FWD/REV/PK(Watt) of 150/100/-

Electrical Specification

Part Number	JIM1800T2100PN10A3
Frequency (GHz)	1.800~2.100
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	150/100/-


Outline

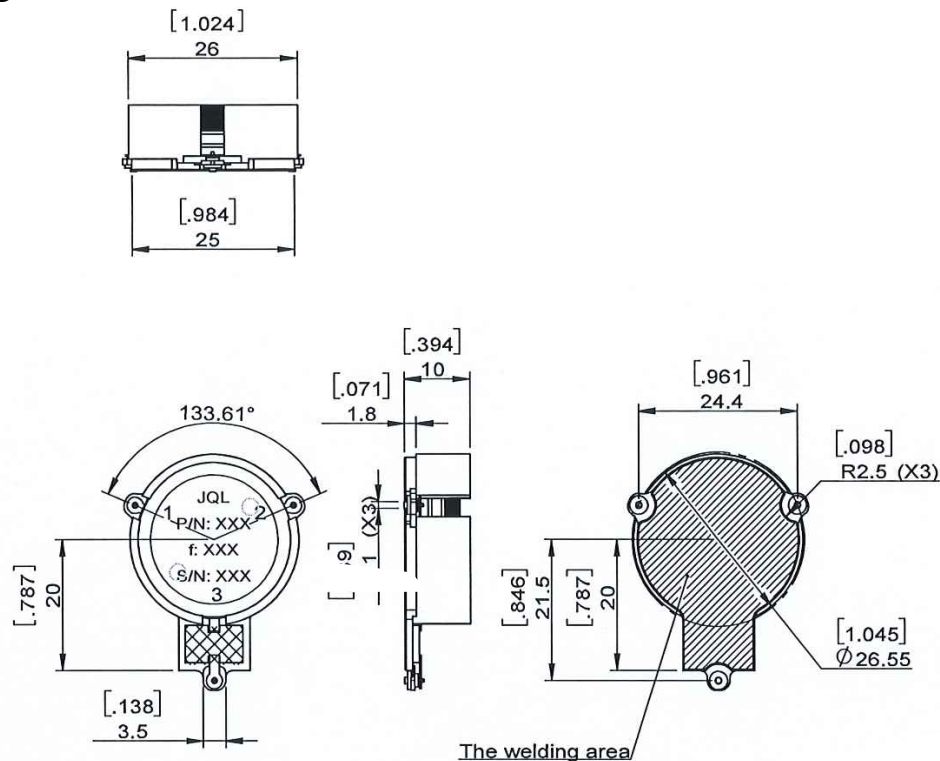

1.8~2.1GHz Surface Mount Isolator

JIM1800T2100PN10A3

Test Data

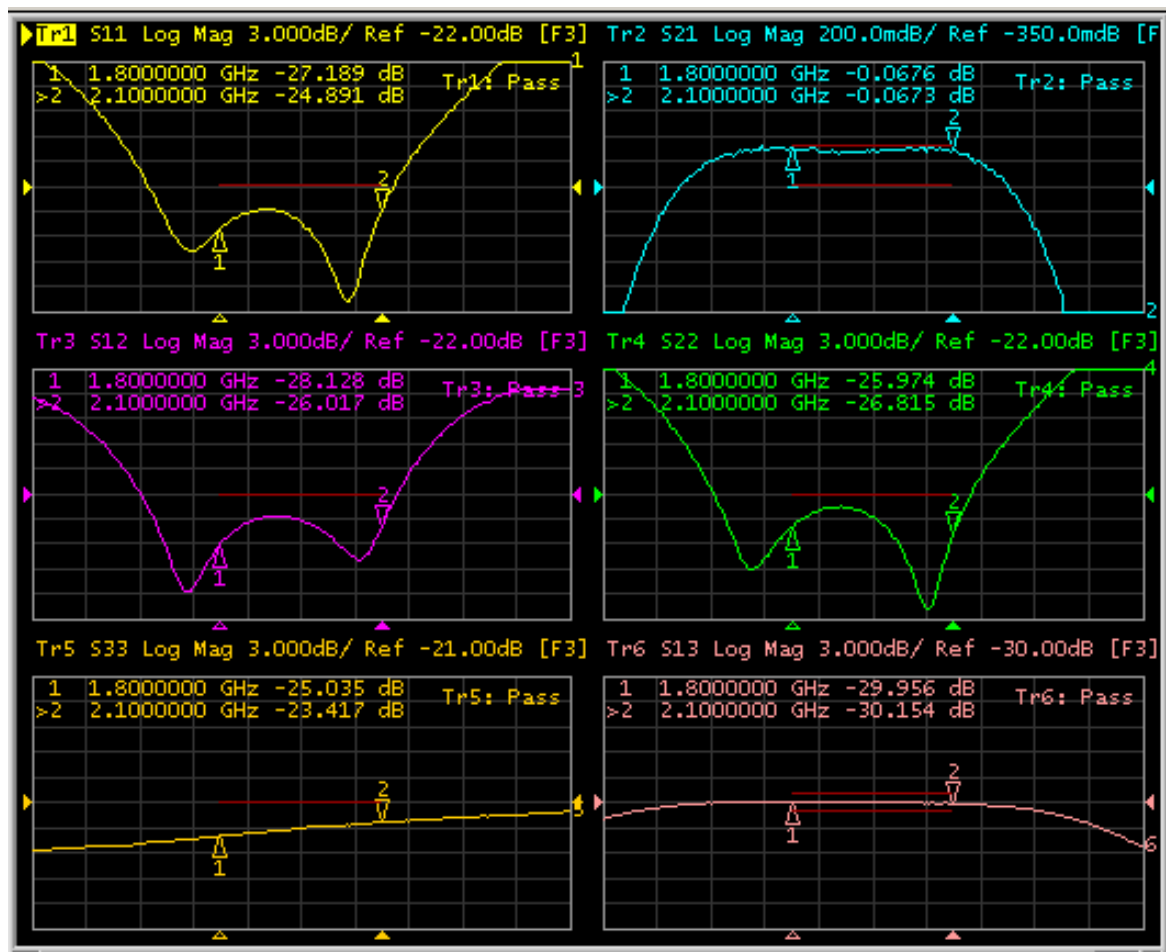

Applications

- Telecom